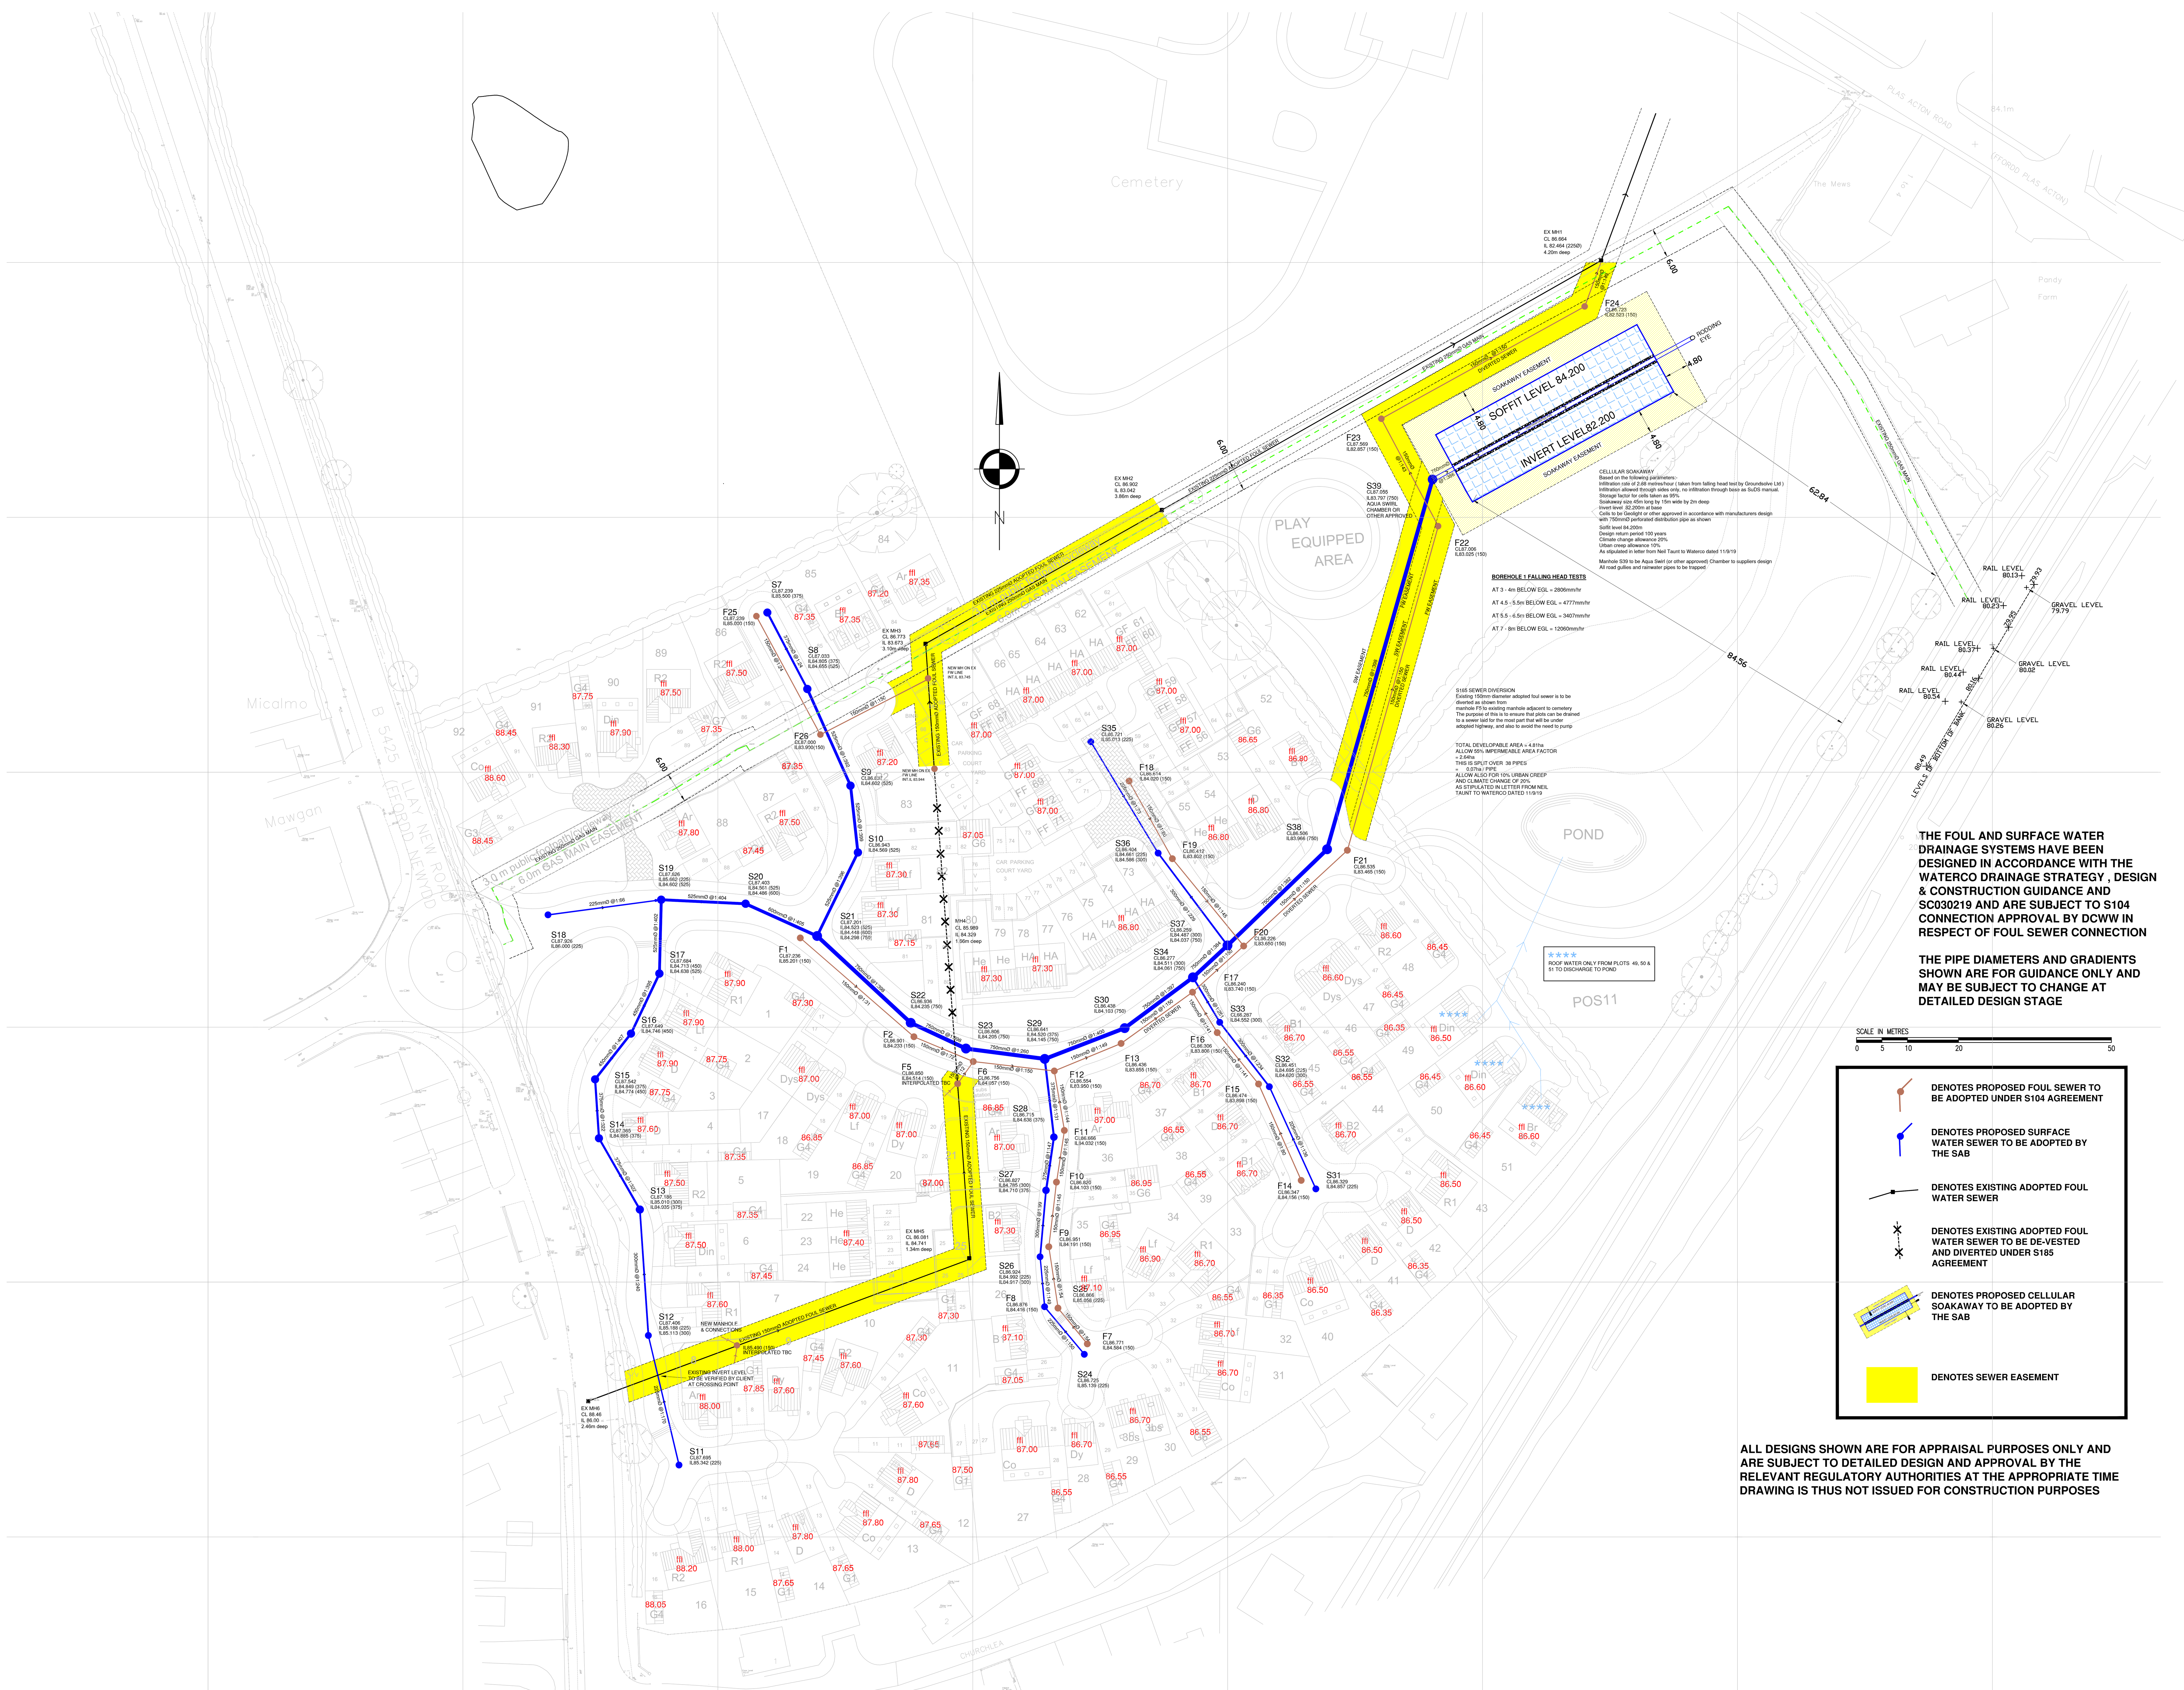


THE FOUL AND SURFACE WATER DRAINAGE SYSTEMS HAVE BEEN DESIGNED IN ACCORDANCE WITH THE WATERCO DRAINAGE STRATEGY , DESIGN & CONSTRUCTION GUIDANCE AND SC030219 AND ARE SUBJECT TO S104 CONNECTION APPROVAL BY DCWW IN RESPECT OF FOUL SEWER CONNECTION

THE PIPE DIAMETERS AND GRADIENTS SHOWN ARE FOR GUIDANCE ONLY AND MAY BE SUBJECT TO CHANGE AT DETAILED DESIGN STAGE

SCALE IN METRES 0 5 10 20 50

DENOTES PROPOSED FOUL SEWER TO BE ADOPTED UNDER S104 AGREEMENT

DENOTES PROPOSED SURFACE WATER SEWER TO BE ADOPTED BY THE SAB

DENOTES EXISTING ADOPTED FOUL WATER SEWER

DENOTES EXISTING ADOPTED FOUL WATER SEWER TO BE DE-VESTED AND DIVERTED UNDER S185 AGREEMENT

DENOTES PROPOSED CELLULAR SOAKAWAY TO BE ADOPTED BY THE SAB

DENOTES SEWER EASEMENT

ALL DESIGNS SHOWN ARE FOR APPRAISAL PURPOSES ONLY AND ARE SUBJECT TO DETAILED DESIGN AND APPROVAL BY THE RELEVANT REGULATORY AUTHORITIES AT THE APPROPRIATE TIME DRAWING IS THUS NOT ISSUED FOR CONSTRUCTION PURPOSES

GENERAL

1. All adoptable sewers and associated works are to comply fully with "Design and Construction Guidance" & Local Practices
2. All highway works to be to adoptable standards and to to comply fully with the Local Authority specification.
3. All private drainage works are to comply fully with part H of the Building Regulations
4. All existing invert levels to be checked by the Contractor at the start of works and any discrepancies notified to REFA. All levels are based on topographical survey information provided by others.
5. All materials to bear the relevant B.S.Kitemark and comply fully with the specifications. All concrete & concrete products must use Sulphate resistant cement (unless the site investigation report proves that sulphate attack from soils and groundwater will not occur)
6. All opening notices etc. as required under highways acts etc. are to be obtained prior to commencement of works. All works are to be inspected by L.A., NHBC or Relevant Water Authority as applicable.

C.D.M. REGULATIONS 2015

In line with the above regulations we are obliged to inform the Client of their responsibilities under section CDM 15/1, and residual risks that may be encountered in the construction of these works. All design work has been carried out with Health and Safety aspects given full consideration. Wherever possible risks have been eliminated from the design, however due to the very nature of this type of work it is not possible to remove all the risks from the design. We would also respectfully remind the Client of his obligations to take all reasonable steps in ensuring that only competent Contractors who have a valid safety policy are employed. They should also provide satisfactory responses at tender stage as to the manner in which they will deal with the elements of risk involved in this type of work and in particular those highlighted by REFA below:-

1. Support / treatment for ALL excavation work.
2. Guarding to edges of excavations to prevent people,materials and vehicles falling into excavation.
3. Guarding of excavations outside working hours to prevent unauthorised access.
4. Undermining to adjacent roads or structures.
5. Confined space operations.
6. Dealing with existing services.
7. Traffic management on existing highways.
8. Procedure to be followed in event of accident or emergency.
9. Method of working where contaminated ground is present on site.
10. Confirmation will be required that all operatives are adequately trained, copies of relevant training certificates to be supplied.

The above list is by no means exhaustive but it does highlight operations that present a risk to contractors and the general public. For clarification on any item please contact REFA.

rev	Revision details	Rev.By	Date
C	FFLS TO PLOTS 34 & 35 GARAGE UPDATED	MM	25.11.21
B	ADDITIONAL INFO ADDED FRO CLIENT 22.11.21	GWH	22.11.21
A	DESIGNS UPDATED PRELIM. FLOOR LEVESL ADDED	GWH	18.11.21

smas worksafe designer www.smasltd.com — as recognised by SSIP SAFETY SCHEMES IN PROCUREMENT

Drawing Stage		Drawing Status	
Draft		Comments	Tender
● Issued	●	Information	Construction
		Approval	As Built

Client

S G ESTATES LIMITED

Job title

LLAY NEW ROAD RHOSROBIN, WREXHAM

Drawing title

DRAINAGE STRATEGY

REFA
45 Bridgeman Terrace
Wigan, Lancs
WN1 1TT
Tel:-(01942) 826020
Fax:-(01942) 230816
CONSULTING ENGINEERS
CIVIL• STRUCTURAL
GEOTECHNICAL•ENVIRONMENTAL

Date	Scale	Drawn
26.10.21	1/500	GWH

DRAWING No 21148/100/1 Rev C

© This drawing is the property of REFA and should not be copied, used or its contents divulged without prior written consent.

A0 SHEET