

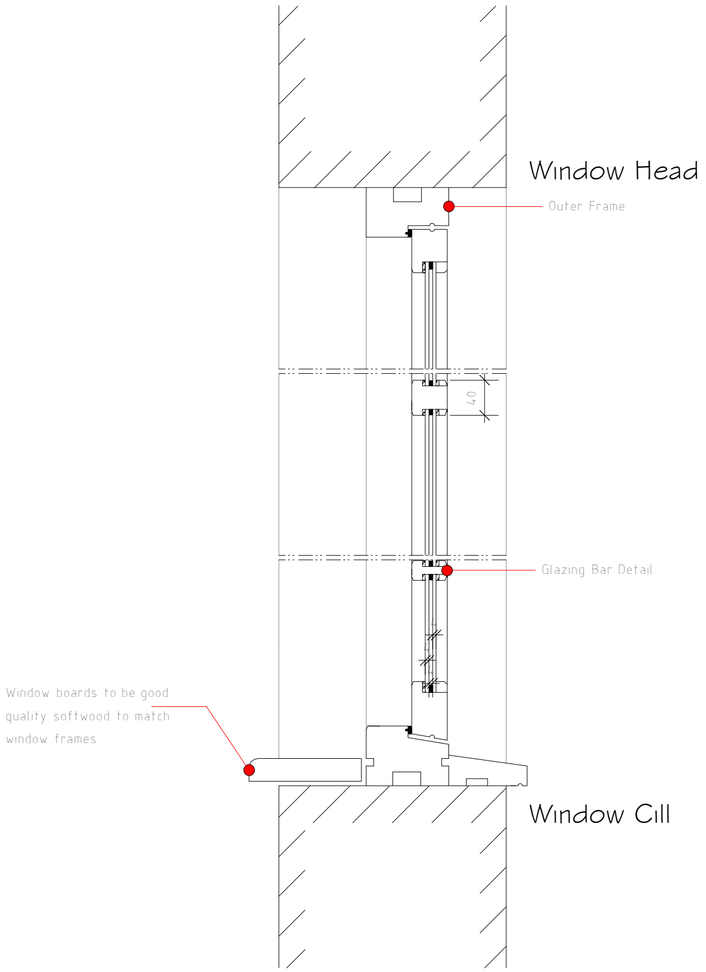


Window Section 1:5

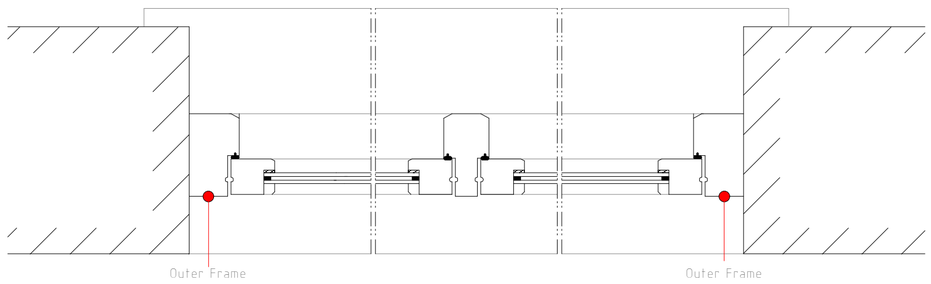

Window Plan 1:5

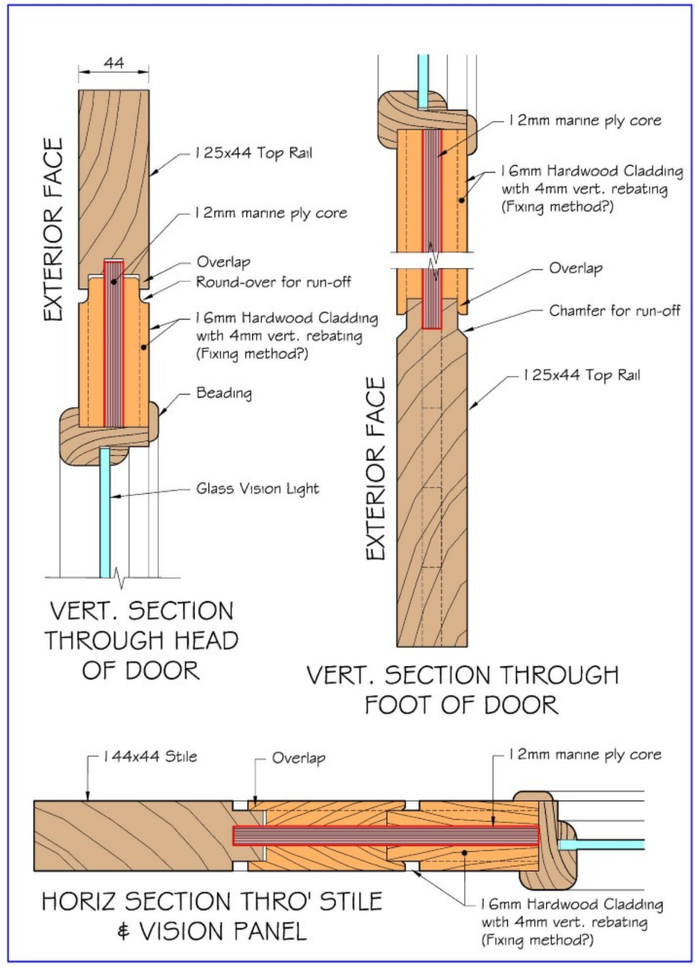

Typical External Timber Door & Shutter

WINDOWS / GLAZING

All windows are to comprise sealed double glazed units set within good quality softwood frames. Sealed glazing to be double glazed units. Opening areas of windows are to be equal to at least 5% of enclosed floor area with part of the opening set at 1750mm above floor level. Provide background ventilation by means of night latch. Glazing in critical locations such as within 800mm of floor level to windows, within 1500mm of floor level to doors, and windows adjacent to doors is to consist of laminated toughened safety glass in accordance with BS 6206 and permanently maked.

Rev	Date	Detail	Initial
A	12/24	Amended Window Details	D.J.E

Project:
Proposed Alterations to,
Cefn Kynaston,
Hill Street, Cefn Mawr,
LL14 3BA

Title: Window Details

Scale: (A2) 1:5

Drawn By: D.J.Edwards

Date: Oct 2024

Drawing No: D149/001

Sheet: 1 of 1

blueprint
architectural services

partner LABC

Office 3K4,
Redwither Business Tower,
Wrexham. LL13 9XT
Tel: 01978 356500
www.blueprintarchitectural.com

© copyright all rights reserved