TARGET FOUNDATION SCHEDULE (Best case estimates only. No allowance for contingencies)

1) Depth of excavation bearing levels are shown indicative only. Actual depths to formation level are to be determined on site and to be inspected by & agreed with REFA
2) FFL's shown should be consistent with external works drawings and any anomolies are to be quiried with REFA. FFL's are also subject to revisions on site


Plot	Existing Ground Level At Time Of Investigaton				Proposed FFL	Average EGL vs FFL of plot +/-	Anticipated Formation Level				Depth Of Foundation Below Existing G.L				Depth Of Foundation Below FFL				Type of suitable founding strata	Approx depth of suitable strata from original GL 0.45m min.	Floor Type	Foundation Type	Retaining Measures	Tree Influence	Tree Reference	Heave Prec.	Underbuild	Deep For Drainage	Remarks/Hazards
	FLH	RLH	RRH	FRH			FLH	RLH	RRH	FRH	FLH	RLH	RRH	FRH	FLH	RLH	RRH	FRH											
1	87.100	87.000	87.000	87.100	87.900	0.850	86.650	86.550	86.550	86.650	0.450	0.450	0.450	0.450	1.250	1.350	1.350	1.250	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
2	87.200	87.000	87.000	87.200	87.850	0.750	86.450	86.550	86.550	86.750	0.750	0.450	0.450	0.450	1.400	1.300	1.300	1.100	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	YES	
2SG	86.900	86.900	86.900	86.900	87.700	0.800	86.450	86.450	86.450	86.450	0.450	0.450	0.450	0.450	1.250	1.250	1.250	1.250	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
3	87.200	87.000	87.000	87.200	87.800	0.700	86.750	86.550	86.400	86.750	0.450	0.450	0.600	0.450	1.050	1.250	1.400	1.050	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	YES	
3SG	86.900	86.900	86.900	86.900	87.650	0.750	86.450	86.400	86.450	86.450	0.450	0.500	0.450	0.450	1.200	1.250	1.200	1.200	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	YES	YES	
4	86.900	86.900	86.900	86.800	87.600	0.725	86.450	86.450	86.450	86.350	0.450	0.450	0.450	0.450	1.150	1.150	1.150	1.250	CLAY	0.450	BLOCK & BEAM	STANDARD STRIP	N/A	NO		NO	NO	NO	
4SG	86.600	86.600	86.600	86.600	87.350	0.750	86.150	86.150	86.150	86.150	0.450	0.450	0.450	0.450	1.200	1.200	1.200	1.200	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
5	86.600	86.600	86.600	86.600	87.450	0.850	86.150	86.150	86.150	86.150	0.450	0.450	0.450	0.450	1.300	1.300	1.300	1.300	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
5SG	86.500	86.500	86.500	86.500	87.250	0.750	86.050	86.050	86.050	86.050	0.450	0.450	0.450	0.450	1.200	1.200	1.200	1.200	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
6	86.600	86.500	86.500	86.600	87.350	0.800	86.150	86.050	86.050	86.150	0.450	0.450	0.450	0.450	1.200	1.300	1.300	1.200	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
6SG	86.450	86.450	86.450	86.450	87.300	0.850	85.700	85.700	85.700	85.700	0.750	0.750	0.750	0.750	1.600	1.600	1.600	1.600	CLAY	0.750	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	NO	NO	FORMER POND
7	86.600	86.500	86.500	86.600	87.600	1.050	85.850	85.750	85.750	85.850	0.750	0.750	0.750	0.750	1.750	1.850	1.850	1.750	CLAY	0.750	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	YES	NO	SEWER EASEMENT-FORMER POND-NOT FOUND
8	86.800	86.800	86.600	86.700	87.900	1.175	85.800	85.800	86.150	86.250	1.000	1.000	0.450	0.450	2.100	2.100	1.750	1.650	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	YES	HAWTHORN	NO	NO	NO	SEWER EASEMENT
8SG	86.550	86.550	86.550	86.550	87.850	1.300	86.100	86.100	86.100	86.100	0.450	0.450	0.450	0.450	1.750	1.750	1.750	1.750	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	YES	NO	SEWER EASEMENT
9	86.800	86.600	86.500	86.800	87.600	0.925	86.350	86.150	86.050	86.350	0.450	0.450	0.450	0.450	1.250	1.450	1.550	1.250	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
9SG	86.500	86.500	86.500	86.500	87.450	0.950	86.050	86.050	86.050	86.050	0.450	0.450	0.450	0.450	1.400	1.400	1.400	1.400	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	SEWER EASEMENT
10	86.600	86.450	86.400	86.700	87.600	1.062	86.150	86.000	85.950	86.250	0.450	0.450	0.450	0.450	1.450	1.600	1.650	1.350	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	SEWER EASEMENT
10SG	86.350	86.350	86.350	86.350	87.300	0.950	85.900	85.900	85.900	85.900	0.450	0.450	0.450	0.450	1.400	1.400	1.400	1.400	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	SEWER EASEMENT
11	86.800	86.750	87.600	87.850	87.600	0.350	86.350	86.300	86.550	86.550	0.450	0.450	1.050	1.300	1.250	1.300	1.050	1.050	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	SEWER EASEMENT
11SG	88.150	88.150	88.150	88.150	87.650	-0.500	86.550	86.750	86.750	86.750	1.600	1.400	1.400	1.400	1.100	0.900	0.900	0.900	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	NO	YES	SEWER EASEMENT
12	88.150	88.300	88.300	88.250	87.800	-0.450	86.750	86.750	86.750	86.750	1.400	1.550	1.550	1.500	1.050	1.050	1.050	1.050	CLAY	0.450	BLOCK & BEAM	TRENCHFILL	N/A	NO		NO	NO	NO	
12SG	88.200	88.200	88.200	88.200	87.650	-0.550	86.750	86.750	86.750	86.750	1.450	1.450	1.450	1.450	0.900	0.900	0.900	0.900	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	NO	NO	SEWER EASEMENT
13	88.300	88.300	88.300	88.300	87.800	-0.500	86.750	86.750	86.750	86.600	1.550	1.550	1.550	1.700	1.050	1.050	1.050	1.200	CLAY	0.450	BLOCK & BEAM	TRENCHFILL	N/A	NO		NO	NO	YES	
13SG	88.250	88.250	88.250	88.250	87.650	-0.600	86.750	86.600	86.600	86.750	1.500	1.650	1.650	1.500	0.900	1.050	1.050	0.900	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	YES	NO	
14	88.150	88.200	88.150	88.000	87.800	-0.325	86.750	86.750	86.750	86.750	1.400	1.450	1.400	1.250	1.050	1.050	1.050	1.050	CLAY	0.450	BLOCK & BEAM	TRENCHFILL	N/A	NO		NO	NO	NO	
14SG	87.900	87.900	87.900	87.900	87.650	-0.250	86.750	86.450	86.450	86.750	1.150	1.450	1.450	1.150	0.900	1.200	1.200	0.900	CLAY	0.450	BLOCK & BEAM	STANDARD STRIP	N/A	NO		NO	YES	NO	
15	87.800	87.900	87.550	87.450	88.000	0.325	86.800	86.800	86.950	86.800	1.000	1.100	0.600	0.650	1.200	1.200	1.050	1.200	CLAY	0.450	BLOCK & BEAM	STANDARD STRIP	N/A	NO		NO	YES	YES	
16	87.350	87.400	87.950	88.100	88.200	0.500	86.900	86.950	86.200	86.100	0.450	0.450	1.750	2.000	1.300	1.250	2.000	2.100	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	HAWTHORN	YES	YES	NO	
16SG	88.300	88.500	89.300	89.500	88.050	-0.850	86.050	86.300	86.050	85.550	2.250	2.200	3.250	3.950	2.000	1.750	2.000	2.500	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	YES	YES	HAWTHORN	YES	NO	NO	TANKING
17SG	86.900	87.000	87.000	86.900	87.100	0.150	86.200	86.200	86.200	86.200	0.700	0.800	0.800	0.700	0.900	0.900	0.900	0.900	CLAY	0.450	BLOCK & BEAM	STANDARD STRIP	N/A	YES		NO	NO	NO	TANKING
17/18	86.450	86.350	86.650	86.700	87.000	0.462	85.950	85.900	85.950	85.950	0.500	0.450	0.700	0.750	1.050	1.100	1.050	1.050	CLAY	0.450	BLOCK & BEAM	STANDARD STRIP	N/A	NO		NO	NO	NO	
18SG	86.350	86.350	86.350	86.350	86.900	0.550	85.900	85.900	85.900	85.900	0.450	0.450	0.450	0.450	1.000	1.000	1.000	1.000	CLAY	0.450	BLOCK & BEAM	STANDARD STRIP	N/A	NO		NO	NO	NO	
19	86.300	86.250	86.300	86.350	87.000	0.700	85.850	85.800	85.850	85.900	0.450	0.450	0.450	0.450	1.150	1.200	1.150	1.100	CLAY	0.450	BLOCK & BEAM	STANDARD STRIP	N/A	NO		NO	NO	NO	
19SG	86.250	86.250	86.250	86.250	86.900	0.650	85.800	85.800	85.800	85.800	0.450	0.450	0.450	0.450	1.100	1.100	1.100	1.100	CLAY	0.450	BLOCK & BEAM	STANDARD STRIP	N/A	NO		NO	NO	NO	
20	86.200	86.200	86.200	86.250	87.000	0.787	85.750	85.750	85.750	85.800	0.450	0.450	0.450	0.450	1.250	1.250	1.250	1.200	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
20SG	86.150	86.150	86.150	86.150	86.850	0.700	85.700	85.700	85.700	85.700	0.450	0.450	0.450	0.450	1.150	1.150	1.150	1.150	CLAY	0.450	BLOCK & BEAM	STANDARD STRIP	N/A	NO		NO	NO	NO	SEWER EASEMENT
21	86.150	86.150	86.150	86.100	86.800	0.662	85.700	85.700	85.700	85.650	0.450	0.450	0.450	0.450	1.100	1.100	1.100	1.150	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	SEWER EASEMENT
21SG	86.150	86.150	86.150	86.150	86.850	0.700	85.700	85.700	85.700	85.700	0.450	0.450	0.450	0.450	1.150	1.150	1.150	1.150	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	SEWER EASEMENT
22-24	86.300	86.350	86.300	86.250	87.400	1.100	85.850	85.900	85.850	85.800	0.450	0.450	0.450	0.450	1.550	1.500	1.550	1.600	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	SEWER EASEMENT
25	86.150	86.150	86.150	86.150	87.000	0.850	85.700	85.700	85.700	85.700	0.450	0.450	0.450	0.450	1.300	1.300	1.300	1.300	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	SEWER EASEMENT
25SG	86.300	86.300	86.300	86.300	87.300	1.000	85.850	85.850	85.850	85.850	0.450	0.450	0.450	0.450	1.450	1.450	1.450	1.450	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	SEWER EASEMENT
26	87.500	87.250	86.500	86.500	86.800	-0.138	85.600	85.700	85.750	85.750	1.900	1.550	0.750	0.750	1.200	1.100	1.050	1.050	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	YES	SEWER EASEMENT
26SG	87.550	87.550	87.550	87.550	86.650	-0.900	85.750	85.750	85.700	85.600	1.800	1.800	1.850	1.950	0.900	0.900	0.950	1.050	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	NO	YES	SEWER EASEMENT
27	88.200	88.000	88.300	88.200	86.800	-1.375	85.300	85.100	85.750	85.700	2.900	2.900	2.550	2.500	1.500	1.700	1.050	1.100	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	YES	YES	SEWER EASEMENT
27SG	88.250	88.250	88.250	88.250	87.300	-0.950	86.400	86.400	86.400	86.400	1.850	1.850	1.850	1.850	0.900	0.900	0.900	0.900	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	YES	NO		NO	NO	YES	SEWER EASEMENT, TANKING
28	87.950	87.800	88.000	88.100	86.600	-1.363	85.550	85.550	85.550	85.550	2.400	2.250	2.450	2.550	1.050	1.050	1.050	1.050	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	NO	NO	
28SG	87.550	87.550	87.550	87.550	86.500	-1.050	85.600	85.600	85.600	85.600	1.950	1.950	1.950	1.950	0.900	0.900	0.900	0.900	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	NO	YES	
29SG	87.700	86.600	87.000	87.700	86.550	-0.700	85.650	85.425	85.425	85.650	2.050	1.175	1.575	2.050	0.900	1.125	1.125	0.900	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	YES	NO	
29/30	87.650	87.250	87.700	87.900	86.700	-0.925	85.650	85.650	85.650	85.650	2.000	1.600	2.050	2.250	1.050	1.050	1.050	1.050	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	NO	NO	
30/31TG	87.300	87.300	87.300	87.300	86.400	-0.900	85.500	85.050	85.050	85.500	1.800	2.250	2.250	1.800	0.900	1.350	1.350	0.900	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	YES	NO	
31	87.500	87.300	86.600	87.500	86.500	-0.725	85.450	85.450	85.450	85.450	2.050	1.850	1.150	2.050	1.050	1.050	1.050	1.050	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	NO	NO	
32	87.500	87.350	87.300	87.550	86.500	-0.925	85.450	85.450	85.450	85.450	2.050	1.900	1.850	2.100	1.050	1.050	1.050	1.050	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	NO	NO	
32SG	87.450	87.450	87.450	87.450	86.400	-1.050	85.500	85.500	85.500	85.500	1.950	1.950	1.950	1.950	0.900	0.900	0.900	0.900	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	NO	NO	
33	86.750	86.500	87.350	87.500	86.550	-0.475	85.500	85.500	85.500	85.500	1.250	1.000	1.850	2.000	1.050	1.050	1.050	1.050	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	NO	NO	
34	86.650	86.150	86.450	87.000	86.700	0.138	85.650	85.650	85.650	85.000	1.000	0.500	0.800	2.000	1.050	1.050	1.050	1.700	CLAY	0.450	BLOCK & BEAM	STANDARD STRIP	N/A	NO		NO	NO	YES	
34SG	86.200	86.200	86.200	86.200	86.750	0.550	85.750	85.750	85.750	85.750	0.450	0.450	0.450	0.450	1.000	1.000	1.000	1.000	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
35	86.650	86.350	86.350	86.950	86.900	0.325	85.850	85.850	85.850	85.700	0.800	0.500	0.500	1.250	1.050	1.050	1.050	1.200	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	YES	NO	
35/36TG	85.900	85.900	85.900	85.900	86.700	0.800	85.450	85.425	85.425	85.450	0.450	0.475	0.475	0.450	1.250	1.275	1.275	1.250	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	YES	NO	
36	85.850	85.850	85.950	85.950	86.900	1.000	85.400	85.400	85.500	85.500	0.450	0.450	0.450	0.450	1.500	1.500	1.400	1.400	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	YES	NO	

TARGET FOUNDATION SCHEDULE (Best case estimates only. No allowance for contingencies)

1) Depth of excavation bearing levels are shown indicative only. Actual depths to formation level are to be determined on site and to be inspected by & agreed with REFA
2) FFL's shown should be consistent with external works drawings and any anomolies are to be quiried with REFA. FFL's are also subject to revisions on site

Plot	Existing Ground Level At Time Of Investigaton				Proposed FFL	Average EGL vs FFL of plot +/-	Anticipated Formation Level				Depth Of Foundation Below Existing G.L				Depth Of Foundation Below FFL				Type of suitable founding strata	Approx depth of suitable strata from original GL 0.45m min.	Floor Type	Foundation Type	Retaining Measures	Tree Influence	Tree Reference	Heave Prec.	Underbuild	Deep For Drainage	Remarks/Hazards
	FLH	RLH	RRH	FRH			FLH	RLH	RRH	FRH	FLH	RLH	RRH	FRH	FLH	RLH	RRH	FRH											
37	85.650	85.650	85.750	85.750	86.600	0.900	85.200	85.200	85.300	85.300	0.450	0.450	0.450	0.450	1.400	1.400	1.300	1.300	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	YES	YES	
37SG	85.750	85.750	85.750	85.750	86.450	0.700	85.300	85.300	85.300	85.300	0.450	0.450	0.450	0.450	1.150	1.150	1.150	1.150	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
38	85.650	85.700	85.700	85.650	86.700	1.025	85.200	85.250	85.250	85.200	0.450	0.450	0.450	0.450	1.500	1.450	1.450	1.500	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
38SG	85.750	85.750	85.750	85.750	86.550	0.800	85.300	85.300	85.300	85.300	0.450	0.450	0.450	0.450	1.250	1.250	1.250	1.250	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
39	86.300	86.000	85.700	85.950	86.500	0.513	85.450	85.450	85.225	85.225	0.850	0.550	0.475	0.725	1.050	1.050	1.275	1.275	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	YES	NO	
39SG	85.800	85.800	85.800	85.800	86.400	0.600	85.350	85.350	85.350	85.350	0.450	0.450	0.450	0.450	1.050	1.050	1.050	1.050	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
40	87.200	87.000	87.150	87.350	86.300	-0.875	85.250	85.250	85.250	85.250	1.950	1.750	1.900	2.100	1.050	1.050	1.050	1.050	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	NO	NO	
40SG	87.350	87.350	87.350	87.350	86.150	-1.200	85.100	85.250	85.250	85.250	2.250	2.100	2.100	2.100	1.050	0.900	0.900	0.900	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	NO	YES	
41	87.000	86.900	86.900	86.150	86.300	-0.438	85.250	85.250	85.250	85.250	1.750	1.650	1.650	0.900	1.050	1.050	1.050	1.050	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	NO	NO	
41SG	87.000	86.600	86.600	87.000	86.150	-0.650	85.250	84.800	84.800	85.250	1.750	1.800	1.800	1.750	0.900	1.350	1.350	0.900	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	NO		NO	YES	NO	
42	87.000	86.800	86.800	87.000	86.300	-0.600	85.250	85.050	85.250	85.100	1.750	1.750	1.550	1.900	1.050	1.250	1.050	1.200	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	OAK	NO	YES	NO	
42SG	86.800	86.400	86.400	86.800	86.150	-0.450	84.900	84.650	84.650	85.250	1.900	1.750	1.750	1.550	1.250	1.500	1.500	0.900	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	OAK	NO	YES	NO	
43	87.000	86.600	86.650	86.950	86.300	-0.500	85.050	84.550	84.800	85.250	1.950	2.050	1.850	1.700	1.250	1.750	1.500	1.050	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	OAK	YES	NO	YES	
44	85.650	85.650	86.400	86.550	86.400	0.337	85.200	85.200	85.350	85.350	0.450	0.450	1.050	1.200	1.200	1.200	1.050	1.050	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
44SG	85.600	85.600	85.600	85.600	86.350	0.750	85.150	85.150	85.150	85.150	0.450	0.450	0.450	0.450	1.200	1.200	1.200	1.200	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
45	85.600	85.600	85.500	85.550	86.700	1.138	85.150	85.150	85.050	85.100	0.450	0.450	0.450	0.450	1.550	1.550	1.650	1.600	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
45SG	85.550	85.550	85.550	85.550	86.550	1.000	85.100	85.100	85.100	85.100	0.450	0.450	0.450	0.450	1.450	1.450	1.450	1.450	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
46SG	85.500	85.500	85.500	85.500	86.550	1.050	85.050	85.050	85.050	85.050	0.450	0.450	0.450	0.450	1.500	1.500	1.500	1.500	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
46/47	85.600	85.500	85.550	85.600	86.600	1.037	85.150	85.050	85.100	85.050	0.450	0.450	0.450	0.550	1.450	1.550	1.500	1.550	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	YES	
47SG	85.500	85.500	85.500	85.500	86.450	0.950	85.050	85.050	85.050	85.050	0.450	0.450	0.450	0.450	1.400	1.400	1.400	1.400	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	YES	NO	
48	85.700	85.650	85.550	85.650	86.500	0.862	84.700	84.650	85.100	85.200	1.000	1.000	0.450	0.450	1.800	1.850	1.400	1.300	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	YES	HAWTHORN	NO	NO	NO	
48SG	85.500	85.500	85.500	85.500	86.400	0.900	83.750	83.750	84.250	84.250	1.750	1.750	1.250	1.250	2.650	2.650	2.150	2.150	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	HAWTHORN	YES	NO	NO	
49	85.600	85.550	85.500	85.550	86.300	0.750	84.350	85.100	85.050	84.300	1.250	0.450	0.450	1.250	1.950	1.200	1.250	2.000	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	HAWTHORN	NO	NO	NO	
49SG	85.600	85.600	85.600	85.600	86.200	0.600	84.350	85.150	85.150	84.350	1.250	0.450	0.450	1.250	1.850	1.050	1.050	1.850	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	HAWTHORN	NO	NO	NO	
50	86.600	86.650	86.000	85.650	86.400	0.175	84.900	85.150	85.350	84.400	1.700	1.500	0.650	1.250	1.500	1.250	1.050	2.000	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	OAK	NO	NO	NO	
50SG	85.700	85.700	85.700	85.700	86.300	0.600	85.250	85.250	85.250	85.250	0.450	0.450	0.450	0.450	1.050	1.050	1.050	1.050	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO	OAK	NO	YES	NO	
51	86.400	86.350	86.800	86.700	86.400	-0.162	84.150	84.350	84.900	84.650	2.250	2.000	1.900	2.050	2.250	2.050	1.500	1.750	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	OAK	YES	NO	NO	
51SG	86.800	86.800	86.800	86.800	86.300	-0.500	84.550	84.550	84.800	84.800	2.250	2.250	2.000	2.000	1.750	1.750	1.500	1.500	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	OAK	YES	NO	NO	
52	86.050	86.000	86.050	86.050	86.700	0.662	84.050	85.000	84.800	84.050	2.000	1.000	1.250	2.000	2.650	1.700	1.900	2.650	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	HAWTHORN	YES	YES	NO	SEWER EASEMENT
52/53TG	86.000	86.000	86.000	86.000	86.650	0.650	85.000	84.750	84.500	84.750	1.000	1.250	1.500	1.250	1.650	1.900	2.150	1.900	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	HAWTHORN	NO	NO	NO	SEWER EASEMENT
53	85.650	85.700	85.850	85.750	86.700	0.962	85.200	85.250	85.400	85.300	0.450	0.450	0.450	0.450	1.500	1.450	1.300	1.400	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
54/55	85.650	85.700	85.700	85.650	86.800	1.125	85.200	85.250	85.250	85.200	0.450	0.450	0.450	0.450	1.600	1.550	1.550	1.600	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	YES	NO	
56-59	86.000	86.050	85.800	85.700	87.000	1.113	84.750	84.550	84.550	84.700	1.250	1.500	1.250	1.000	2.250	2.450	2.450	2.300	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	OAK	NO	YES	NO	
60/61	86.000	86.250	86.300	86.150	87.000	0.825	84.750	85.000	84.550	84.400	1.250	1.250	1.750	1.750	2.250	2.000	2.450	2.600	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	OAK	YES	NO	NO	
62-66	86.000	86.150	86.250	86.050	87.000	0.888	85.550	85.700	85.000	84.800	0.450	0.450	1.250	1.250	1.450	1.300	2.000	2.200	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	OAK	NO	NO	NO	
67/68	86.100	86.150	86.150	86.000	87.000	0.900	85.650	85.700	85.700	85.550	0.450	0.450	0.450	0.450	1.350	1.300	1.300	1.450	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
69-72	85.750	85.850	85.950	85.950	87.000	1.125	85.300	85.400	85.500	85.500	0.450	0.450	0.450	0.450	1.700	1.600	1.500	1.500	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	YES	NO	
73-76	85.750	85.800	85.700	85.650	86.750	1.025	85.150	85.200	85.100	85.050	0.600	0.600	0.600	0.600	1.600	1.550	1.650	1.700	CLAY	0.600	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	YES	NO	
77-80	86.100	86.100	85.800	85.800	87.200	1.250	84.900	84.900	85.200	85.200	1.200	1.200	0.600	0.600	2.300	2.300	2.000	2.000	CLAY	0.600	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	YES	SEWER EASEMENT
81	86.650	86.450	86.450	86.650	87.200	0.650	86.150	86.000	86.000	86.150	0.500	0.450	0.450	0.500	1.050	1.200	1.200	1.050	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
81SG	86.400	86.400	86.400	86.400	87.050	0.650	85.950	85.950	85.950	85.950	0.450	0.450	0.450	0.450	1.100	1.100	1.100	1.100	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	
82	86.650	86.350	86.350	86.600	87.100	0.612	85.900	85.900	85.900	86.050	0.750	0.450	0.450	0.550	1.200	1.200	1.200	1.050	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	YES	NO	SEWER EASEMENT
82/83TG	86.100	86.100	86.100	86.100	87.050	0.950	85.650	85.650	85.650	85.650	0.450	0.450	0.450	0.450	1.400	1.400	1.400	1.400	CLAY	0.450	BLOCK & BEAM	DEEP STRIP	N/A	NO		NO	NO	NO	SEWER EASEMENT
83	86.600	86.450	86.700	86.750	87.100	0.475	85.900	86.000	86.050	85.900	0.700	0.450	0.650	0.850	1.200	1.100	1.050	1.200	CLAY	0.450	BLOCK & BEAM	STANDARD STRIP	N/A	NO		NO	YES	NO	SEWER EASEMENT
84	86.650	86.750	86.750	86.750	87.350	0.625	85.150	85.000	85.000	85.250	1.500	1.750	1.750	1.500	2.200	2.350	2.350	2.100	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	OAK	YES	NO	YES	
84SG	86.700	86.700	86.700	86.700	87.200	0.500	85.200	84.950	84.950	85.200	1.500	1.750	1.750	1.500	2.000	2.250	2.250	2.000	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	OAK	YES	NO	NO	
85	86.900	87.000	86.900	86.650	87.350	0.487	85.900	85.750	85.150	85.400	1.000	1.250	1.750	1.250	1.450	1.600	2.200	1.950	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	OAK	YES	NO	NO	
85SG	87.100	87.100	87.100	87.100	87.200	0.100	86.100	85.600	85.850	86.100	1.000	1.500	1.250	1.000	1.100	1.600	1.350	1.100	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	OAK	NO	YES	NO	
86	87.350	87.400	87.250	87.250	87.500	0.188	86.400	86.400	86.250	86.450	0.950	1.000	1.000	0.800	1.100	1.100	1.250	1.050	CLAY	0.450	BLOCK & BEAM	STANDARD STRIP	N/A	YES	HAWTHORN	NO	NO	YES	
87	87.150	87.250	87.150	87.000	87.300	0.162	86.250	86.250	86.250	86.250	0.900	1.000	0.900	0.750	1.050	1.050	1.050	1.050	CLAY	0.450	BLOCK & BEAM	STANDARD STRIP	N/A	NO		NO	NO	NO	GAS MAIN EASEMENT
87SG	87.100	87.100	87.100	87.100	87.150	0.050	86.250	86.250	86.250	86.250	0.850	0.850	0.850	0.850	0.900	0.900	0.900	0.900	CLAY	0.450	BLOCK & BEAM	STANDARD STRIP	N/A	NO		NO	NO	NO	GAS MAIN EASEMENT
88	87.650	87.500	87.400	87.500	87.800	0.287	86.750	86.750	86.750	86.500	0.900	0.750	0.650	1.000	1.050	1.050	1.050	1.300	CLAY	0.450	BLOCK & BEAM	STANDARD STRIP	N/A	NO		NO	NO	YES	
88SG	87.250	87.250	87.250	87.250	87.350	0.100	86.450	86.450	86.450	86.450	0.800	0.800	0.800	0.800	0.900	0.900	0.900	0.900	CLAY	0.450	BLOCK & BEAM	STANDARD STRIP	N/A	NO		NO	NO	NO	
89	87.600	87.600	87.450	87.450	87.500	-0.025	86.450	86.000	86.200	86.450	1.150	1.600	1.250	1.000	1.050	1.500	1.300	1.050	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	HAWTHORN	NO	NO	NO	
89DG	87.450	87.450	87.450	87.450	87.350	-0.100	86.450	86.450	86.450	86.300	1.000	1.000	1.000	1.150	0.900	0.900	0.900	1.050	CLAY	0.450	BLOCK & BEAM	STANDARD STRIP	N/A	NO		NO	NO	YES	GAS MAIN EASEMENT
90	87.900	87.900	87.650	87.650	87.900	0.125	86.850	86.650	86.850	86.850	1.050	1.250	0.800	0.800	1.050	1.250	1.050	1.050	CLAY	0.450	BLOCK & BEAM	STANDARD STRIP	N/A	YES	HAWTHORN	NO	NO	NO	
90SG	88.100	88.100	88.100	88.100	87.750	-0.350	86.500	85.500	85.500	86.500	1.600	2.600	2.600	1.600	1.250	2.250	2.250	1.250	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	YES	YES	HAWTHORN	YES	NO	NO	TANKING
91	88.150	88.250	88.000	87.900	88.300	0.225	87.250	87.000	86.750	87.250	0.900	1.250	1.250	0.650	1.050	1.300	1.550	1.050	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	HAWTHORN	NO	NO	NO	
91/92TG	88.400	88.500	88.700	88.400	88.450	-0.050	87.400	86.450	86.200	87.150	1.000	2.050	2.500	1.250	1.050	2.000	2.250	1.300	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	HAWTHORN	YES	YES	NO	
92	88.300	88.600	88.500	88.250	88.600	0.188	86.550	86.350	87.550	87.550	1.750	2.250	0.950	0.700	2.050	2.250	1.050	1.050	CLAY	0.450	BLOCK & BEAM	TRENCH FILL	N/A	YES	HAWTHORN	YES	NO	YES	

CORNER INDICATION KEY

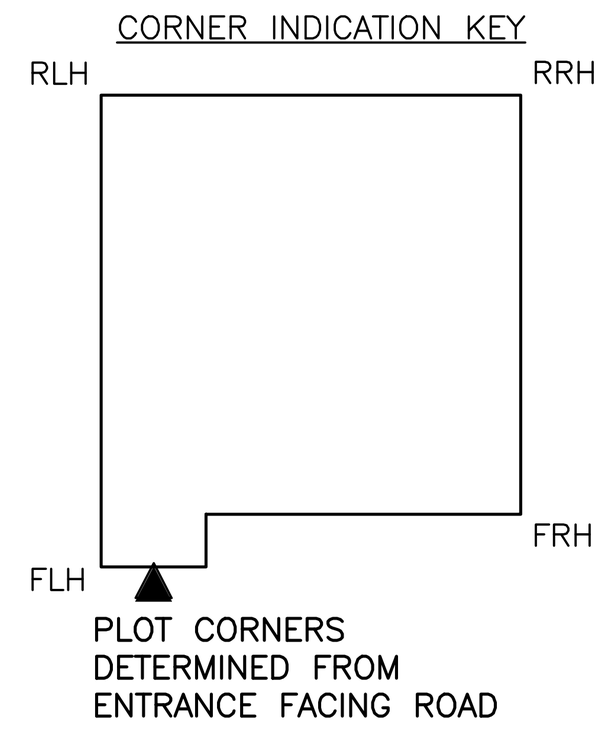

PLOT CORNERS DETERMINED FROM ENTRANCE FACING ROAD

PRELIMINARY- SUBJECT TO EXTERNAL WORKS & PRIVATE DRINAGE LAYOUTS

revision suffix	Revision details	Date
C	Updated to suit latest external works and plot drainage for new layout rev P (rs)	05.04.22
B	Updated to planning PL1/WD500/J (wmi)	26.01.22
A	Updated to latest layout Rev H (rs)	10.12.21

Drawing Stage		Drawing Status			
●	Draft		Comments		Tender
	Issued		Information		Construction
●	Preliminary		Approval		As Built

This drawing is not authorised unless signed as checked & approved

smas worksafe designer www.smasltd.com — as recognised by SSIP SAFETY SCHEMES IN PROCUREMENT

Client
SG ESTATES

Job title
Llay New Road Rhosrobin, Wrexham

Drawing title
Preliminary Foundation Tables

REFA
45 Bridgeman Terrace
Wigan, Lancs
WN1 1TT
Tel:-(01942) 826020
Fax:-(01942) 230816
CONSULTING ENGINEERS
CIVIL • STRUCTURAL
GEOTECHNICAL • ENVIRONMENTAL

Chkd	Appvd	date	scale	drawn
		25.11.21	1:250 @ A0	MM

DRAWING No 21148/200-1 rev C

© This drawing is the property of REFA and should not be copied, used or its contents divulged without prior written consent
Any discrepancies to this drawing discovered on site should be reported to REFA immediately. IF IN DOUBT ASK!