gaelic

Slate Specification Sheet

GAELIC SUPREMA is a grey slate with a smooth flat surface. This phyllite slate is noted for its exceptional consistency of thickness and surface appearance. Qualities that have made it a popular choice for both domestic, large commercial and conservation projects. Split to a thickness of either 5mm or 7mm.



ORIGIN:
Quarry Mondonedo-2, Lugo, Spain

PRODUCTION:
10.500 Tons / year.

FORMATS:
Rectangular

SIZE: (cm)
Between 30x22 to 60x30, according to formats.

UK: 40x20, 40x25, 50x25, 50x30 & 60x30 - slate and a half also available.

Note: If you are interested in other formats, please contact us.


WATER ABSORPTION	< 0,16%
SPECIFIC WEIGHT	2,8 (GR/CM3)
LONGITUDINAL RESISTANCE	< 48 MPA
CARBON CONTENT	<0,1%
THICKNESS	5mm – 7mm

Grading

All natural slate should be graded into at least 3 thicknesses prior to being loaded on to the roof.
To minimize the effect of any variation in shade, slates should be selected from at least 2 crates at a time.
As with any natural product, slate is subject to variance and any slates that are identified at the time of grading as potentially problematic should be cut and used as either undereaves or at the ridge.

For further information on fixing specification please contact us:

TECHNICAL SPECIFICATIONS:
GAELIC SUPREMA slates comply with all requirements of the British Standard: BS 12326 and French NF norm

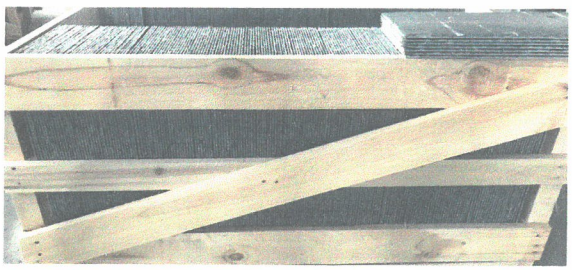

C/ Barco de Avila, 4
32300 Barco de Valdeorras, Ourense (Spain) Tel. +34 988 684 569 info@gaelicpizarras.com