

Copyright Portakabin Limited 2022

This drawing is the property of Portakabin Limited.
It must not be copied or reproduced or divulged to anyone without written permission.
Do not scale off this drawing for construction purposes.
All discrepancies to be reported to Portakabin Limited.

Rev	Revision Description	Date	By
A	Training Room 2 made larger	06.06.24	BME
B	First Floor added as per client request	26.06.224	JW
C	Internal layout changes	21.08.24	CR
D	Stairpod flipped, Ground Floor doors changed to double doors from s.pod to main building and through to open plan area.	13.09.24	MFR
E	Fire strategy added, FE to both floors and Staircase	18.09.24	MFR
F	Stairpod moved to west elevation and links changed to 1.2m	09.10.24	MTK
G	Layout flipped and stairpod relocated to south elevation	14.10.24	LAH
H	GF - Pod moved along to make the open plan office larger. Store doors relocated. FF Pod moved to match GF and door relocated. Storage 2 wall removed	15.10.24	LAH

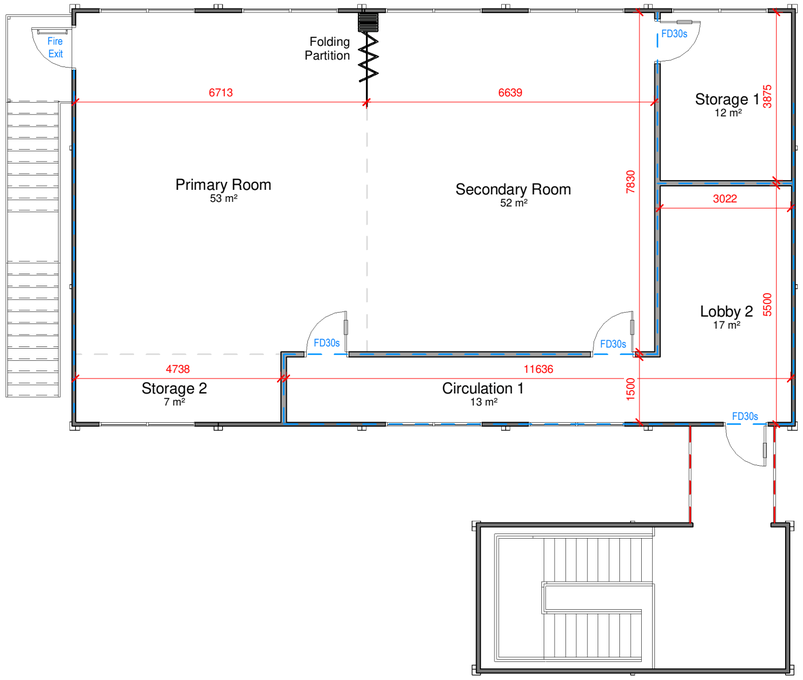


2 First Floor
1 : 100

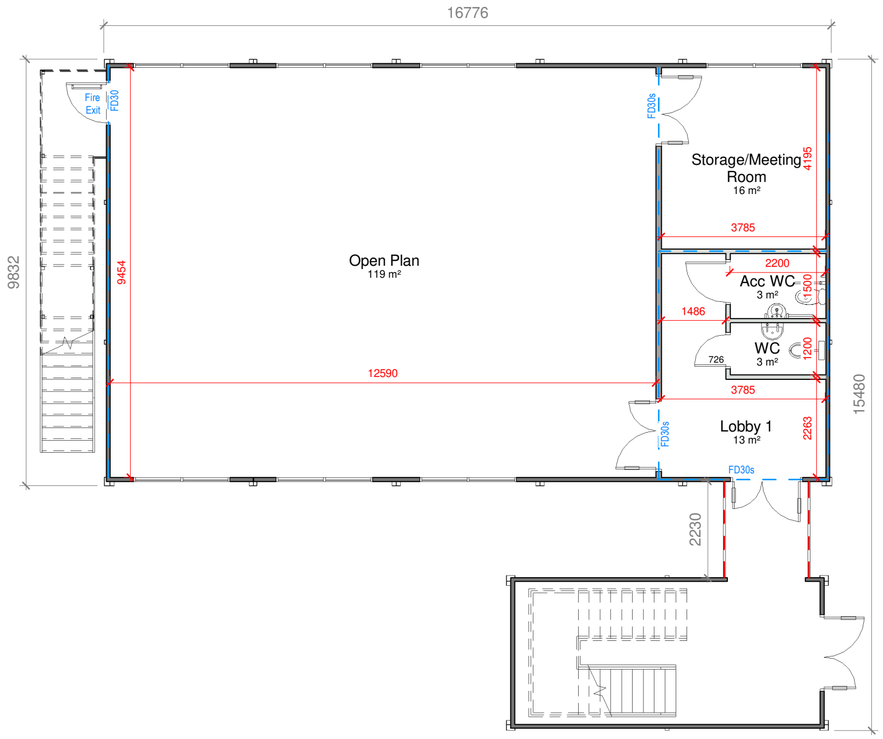


1 Ground Floor
1 : 100


Fire Strategy to be confirmed. Subject to Fire/building officer approval. Max compartment size to be confirmed when location of nearest existing (functional) hydrant is known. If found to be more than 100m from the proposed buildings (where a hose can run), upgraded 60min wall construction or full redesign may be required to reduce compartments to 280m2. Alternatively additional hydrant(s) could be installed as per building regs requirements'

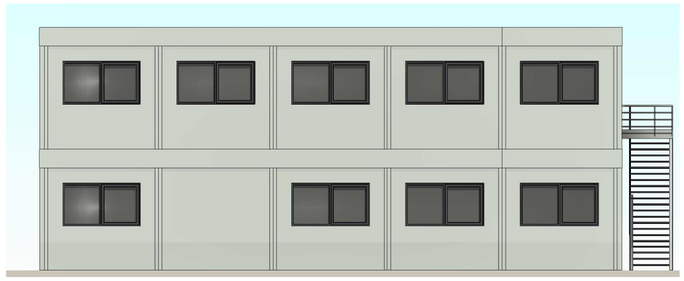

3 North Elevation
1 : 125

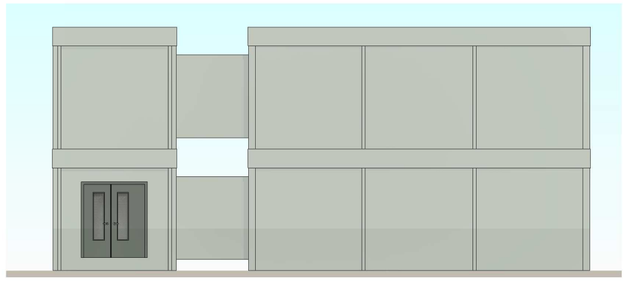

4 East Elevation
1 : 125

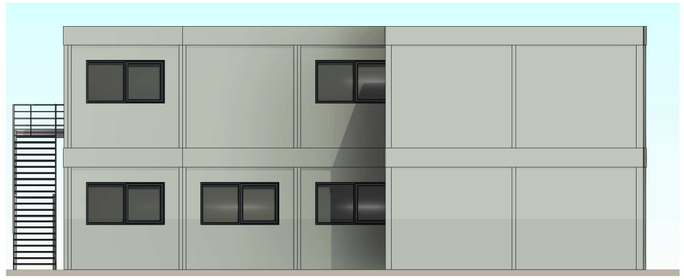

5 South Elevation
1 : 125



6 West Elevation
1 : 125

Total Floor Area - **367m²**

Folding partition is indicative only.

99mm Single Skin Partition
124mm Double Skin Partition
Indicates where 30 min fire rating to be maintained
Indicates where 60 min fire rating to be maintained

Standard floor loading is 3kN/m². Any loading imposed on a floor that is greater than 3kN/m² may require strengthening. Please contact your hire centre if you expect to exceed 3kN/m².

Any fire strategy shown on this drawing is subject to Fire Officer and Building Control approval

Please note that this and any accompanying drawing(s) are for illustrative purposes only and as such, the building shown may vary from the actual finished building on site.

The position of windows, external doors and electrical fixtures (if shown) are dependent on stock availability at time of order.

EXTERNAL COLOUR SCHEME | Ultima

Walls - Goosewing Grey - nearest BS ref 10 A 05
Vertical wall trim - Goosewing Grey - nearest BS ref 10 A 05
Bottom wall trims - White - nearest BS ref 00 E 55
Long wall fascias (covering wall) - Goosewing Grey - nearest BS ref 10 A 05
Long wall fascia (covering beam) - White - nearest BS ref 00 E 55
Short wall composite fascia - Goosewing Grey - nearest BS ref 10 A 05
Roof - White - nearest BS ref 00 E 55
External Skirt - Goosewing Grey - nearest BS ref 10 A 05
Columns, external corners - Grey - BS 4800 00 A 05
Columns, intermediate - Grey - BS 4800 00 A 05
Windows - Blue Grey - nearest BS 4800 18 B 29
Doors (insulated door) - Slate grey - nearest BS 18 B 25

Internal Portakabin Note
For connection details please see drawing DQ0539

Portakabin®
Portakabin Limited New Lane Huntington
York YO32 9PT United Kingdom
+44 (0)1904 611655
portakabin.co.uk

Client: **Kellogg Co. Of Great Britain Ltd**
Project: Training Rooms
Title: Proposed Layout - 5 on 5 UK093 Ultima Module Building with Staircase
Scale @ A2: As indicated
Date: 05.06.2024
Drawn By: BME
Project Number: HD/13896/01
Rev: **H**