
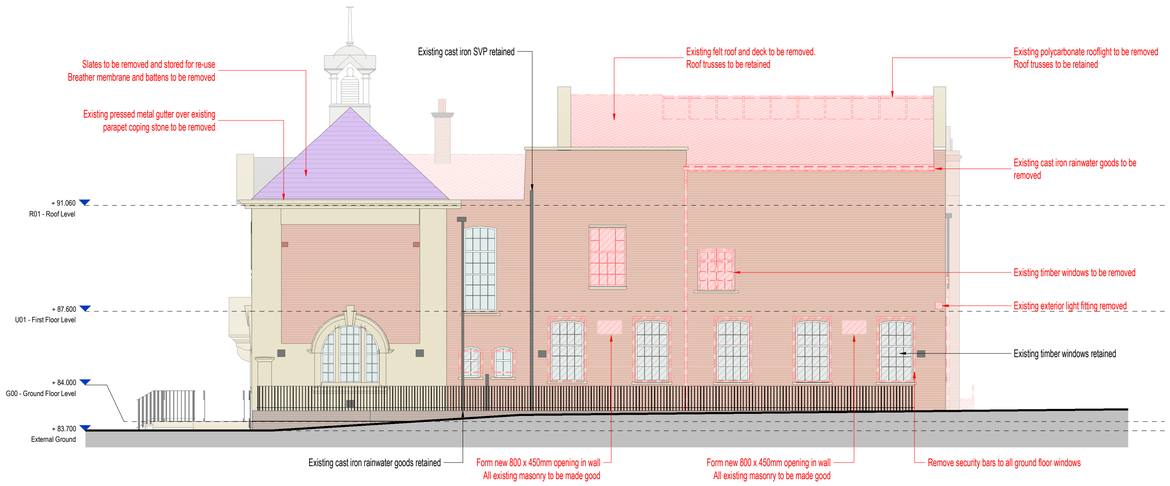


North East Elevation
1 : 100

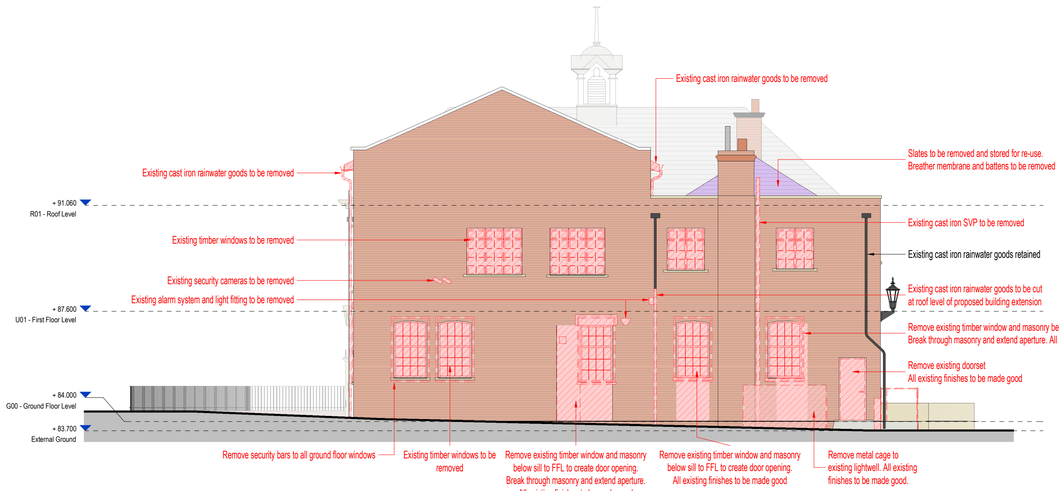

North West Elevation
1 : 100

Construction (Design and Management) Regulations

Design risk assessments are carried out throughout the design stage of this project in accordance with company procedures and manuals. Where reasonably possible all areas of risk applicable to design and end use of the construction have been identified and then eliminated, mitigated or recorded as a residual risk. Note that general risks of which a competent designer or contractor should be aware are not included. This drawing is to be read in conjunction with the Pre-construction Information and all related documents prepared in accordance with the current Construction (Design and Management) Regulations 2015 and all applicable Health and Safety legislation as currently amended.


LEGEND

- Existing Elements
- Demolished Elements
- Slates to be removed and stored for re-use. Breather membrane and battens to be removed.
- Existing Elements
- Existing Elements to be Demolished


Demolition Notes:

- For all mechanical and electrical elements, refer to CWC's reports and drawing packages.
- For all conservation elements, refer to Heritage Impact Assessment report (HIA), and associated drawing packages.
- The Contractor shall notify the Design Team of all discrepancies discovered on site compared to the drawings, prior to commencing works.
- Refer to M&E demolition information / drawings for all building services to be removed and / or protected during demolition / refurbishment.
- Refer to Engineer's drawings for removal of existing drainage.
- Where WHBs, etc., are removed and drainage becomes redundant, connections are to be flushed out prior to capping off at slab level and making good ground floor screed.
- Where walls are removed the contractor is to allow for making good floor screeds, underside of existing soffits, wall connections and making sure the building envelope is water tight.
- The contractor is to allow for the removal and making good loose or damaged plaster.
- The contractor is to allow for the making good of existing substrates following removal of existing finishes.
- All making good methods to be agreed with Design Team and approved by Conservation Officer & Cadw as necessary.
- The cost plan and contractor method statements should include allowance of existing elements and for the safe removal of materials containing asbestos and other materials harmful to health. Refer to asbestos surveys for locations and recommendations as required.
- Demolition plans are to be read in conjunction with demolition elevations and sections where provided.
- Refer to architectural ceiling plans and floor scoping drawings for the extent of existing ceilings and floors being retained.

Note: Contractor / Specialist to review Fire performance of existing doors within retained openings to ensure they achieve fire strategy requirements.

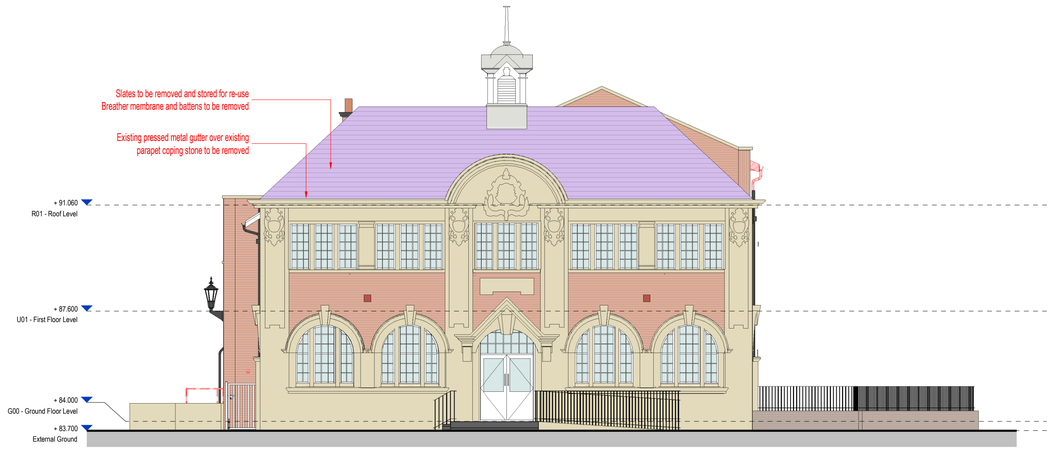

South East Elevation
1 : 100

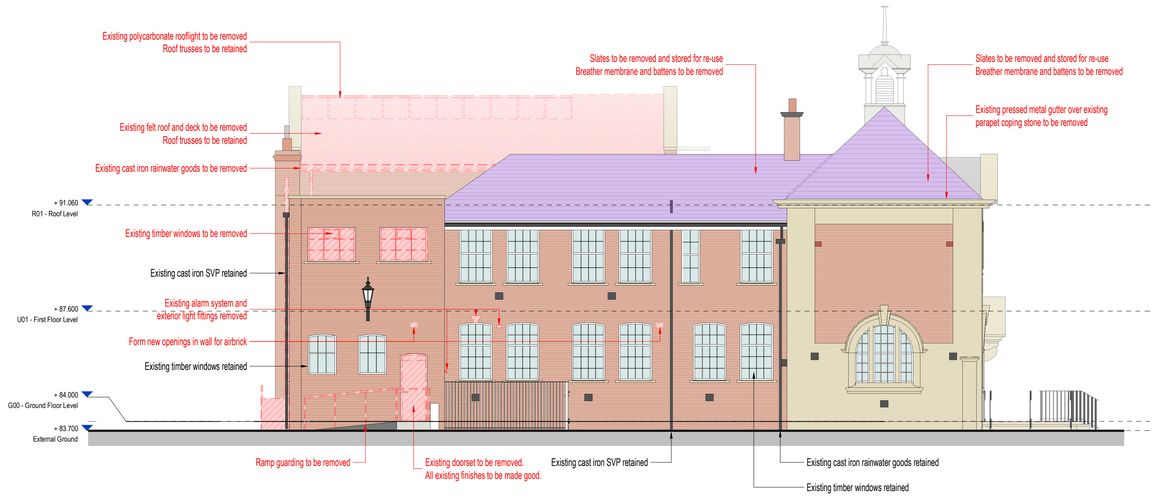

South West Elevation
1 : 100

P03	Stage 4 issue | JT | CB | CB	12/11/2024
P02	Stage 3 Issue | RE | RE | CB	04/09/2024
P01	Draft Stage 3 Issue | AJ | CB | MWR	09/08/2024
P00	Initial input and issue | AJ | CB | MWR	23/07/2024

REV	DESCRIPTION | DRAWN BY | CHECKED BY | APPROVED BY	DATE

RIBA PLAN OF WORK WORKSTAGE Stage 4 - Technical Design	LEVEL OF MODEL DEFINITION (LoD) LoD 3 - Approximate Model
PURPOSE OF ISSUE - SUITABLE FOR ... Tender	STATUS or SUITABILITY NA - Not Applicable

lawray architects

CARDIFF 029 2052 8140
LONDON 0207 138 3560
WREXHAM 01978 357 887
www.lawray.co.uk

CLIENT
Wrexham County Borough Council

PROJECT TITLE
Wrexham Old Library

DRAWING TITLE
Demolition Elevations

PROJECT No
20045

SCALE @ A1
As indicated

DRAWING No
01-ISO 19650
+A2-2016) 8
BS EN ISO19650

TYPE: Project - Originator - Volume - Level - Type - Role - Number
Breakdown Breakdown
WOL-LAW-X-X-DR-**A-042001**

REVISION
P03

DO NOT SCALE

Any discrepancy or query concerning this drawing should be referred to the Architect

Copyright © LAWRAY LIMITED
Registered Office: Greenmeadow Springs, 1 Cae Gwyrdd, Tongwynlais, CARDIFF CF15 7AB
Reg. Co. No. 2724178, VAT Reg. No. 134 2146 06

Print Date: 14/11/2024 20:51:29

File Name: Autodesk Docs://20045_RefurbOldLibrary/WOL-LAW-X-X-M3-A-000002_Building.rvt