Proposed External Materials

Roof - Plain Tiles to Match Existing, Natural Slate to the Drill Hall to Match Existing. Rooflights PPC double glazed, metal Patent Glazed System. PPC louvered metal building services enclosure to an inner area of the existing flat roof. Flat Roofs, proprietary, muti-layer, insulated mineral felt system.

Rainwater Goods - New to be painted Cast Iron where applicable, Existing to be repaired

Fire Escape to rear elevation - Galvanised mild steel.

Walls - Facing Brickwork to match the dimensions, and character of the existing. Where available, matching reclaimed to be used and supplemented with new specials to match the existing. Existing brickwork to be reinstated to match the historical detailing and records.

Doors - Where new, Painted Timber External Doors. Please note, existing historical joinery will be repaired 'like for like'.

Windows - New windows to be painted timber, double glazed sliding sash.Please note, existing historical joinery will be repaired 'like for like' externally.




NW Facing Elevation (Front Elevation)



SW Facing Elevation (Side Elevation)

Existing Elevations - Scale - 1:100 @ A3

0m 1m 2m 3m 4m 5m

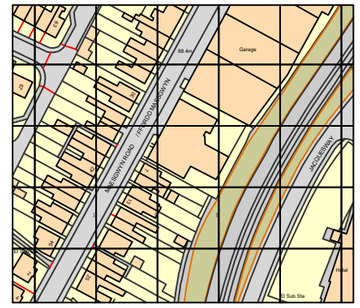

Ordnance Survey. (c) Crown Copyright 2023.
All rights reserved. Licence number 100022432

Site Location Plan - Scale 1:2500

N

Issue.	Date.	Description.	Checked.
---	--.--.--	-----	--

AS PROPOSED

Client.
The Trustees of the
Wrexham Miners Project.

Project.
The Miners Rescue Station,
3-5 Maesgwyn Road, Wrexham, LL11 2AP.

Drawing Title.
Proposed Elevations 1of 2

Dwg. No.
TMRS - GRA-XX-XX-DR-A-Pr05
Project. Company. Zone. Level. Type. Role. Number.

Scale .	Drawn .	Issue. Ref.
+/- 1:100 @ A3	JGR	**P01**
Date . 01.11.23	Checked. JGR	

GERAINT ROBERTS ASSOCIATES
ARCHITECT AND HISTORIC BUILDINGS CONSULTANT
2 Maes Derw, Llanfechain, Powys, SY22 6XN
T: 07722 146949 E: geraint@grauk.com