




DETAIL 01
TYP. CONNECTION
1:5

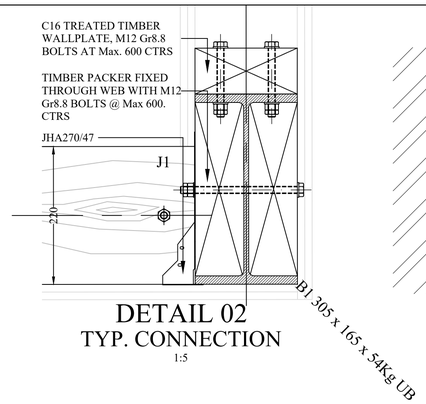


DETAIL 02
TYP. CONNECTION
1:5

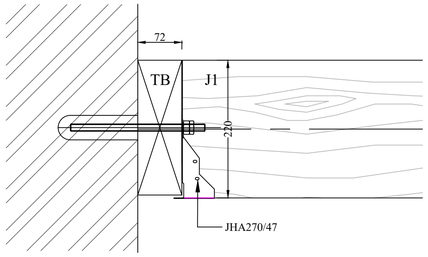


DETAIL 03
TYP. CONNECTION
1:5

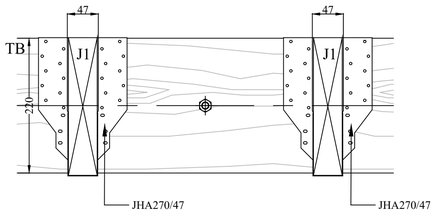


DETAIL 04
TYP. CONNECTION
1:5

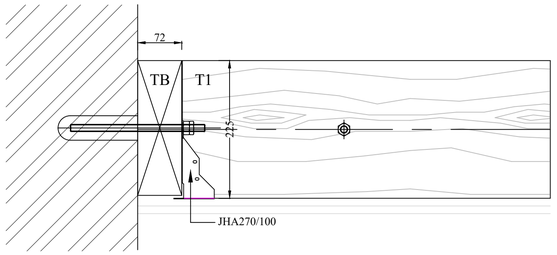


DETAIL 05
TYP. CONNECTION
1:5




DETAIL 06
TYP. CONNECTION
1:5

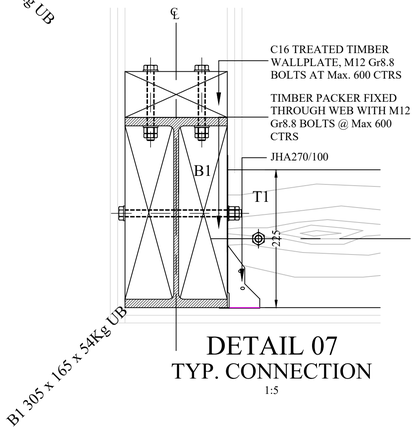


DETAIL 07
TYP. CONNECTION
1:5




DETAIL 08
TYP. CONNECTION
1:5

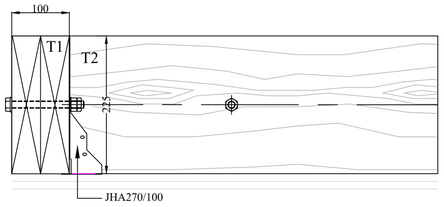

DETAIL 09
TYP. CONNECTION
1:5




DETAIL 10
TYP. CONNECTION
1:5

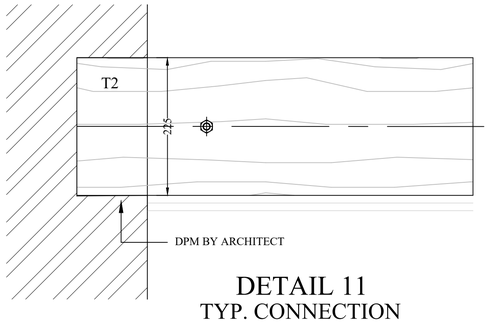


DETAIL 11
TYP. CONNECTION
1:5

DETAIL 12
TYP. CONNECTION
1:5



DETAIL 13
SIMPSON STRONG-TIE JHA270/47
1:5

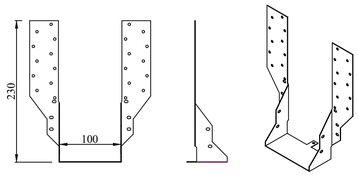

DETAIL 14
SIMPSON STRONG-TIE JHA270/47
1:5

NOTES

1. DO NOT SCALE FROM THIS DRAWING - IF IN DOUBT ASK
2. ALL LEVELS IN METERS UNLESS NOTED OTHERWISE ON DRAWING.
3. ALL DIMENSIONS IN MILLIMETERS UNLESS NOTED OTHERWISE ON DRAWING
4. ALL SETTING OUT, LEVELS & GENERAL BUILDERS DETAILS TO BE CONFIRMED BY OTHERS.
5. ALL TEMPORARY WORKS TO BE DESIGNED & DETAILED BY THE CONTRACTOR.
6. SHORING/PROPPING ARRANGEMENTS TO BE ADEQUATE TO SUPPORT ALL APPLIED LOADS AND CONSIDERATION GIVEN TO THE ADJACENT STRUCTURE IN THE TEMPORARY CONDITION.
7. MIN. 100mm END BEARINGS FOR STEEL AND TIMBER BEAMS, UNLESS OTHERWISE NOTED. MIN. 150mm END BEARINGS FOR CAVITY (IG) TYPE AND PRE-STRESSED CONCRETE LINTELS, UNLESS NOTED OTHERWISE.
8. ALL STRUCTURAL STEELWORK FABRICATION & ERECTION TO BE IN ACCORDANCE WITH THE NATIONAL STRUCTURAL STEELWORK SPECIFICATION (NSSS) FOR BUILDING CONSTRUCTION - 5TH EDITION, CE MARKING VERSION.
9. **ALL HOT ROLLED STEELWORK MATERIAL TO BE GRADE S355 : JR TO BS EN ISO 10025. EXECUTION CLASS EXC2**
10. ALL BOLTS TO BE GRADE 8.8 AND GALVANISED.
11. ALL GROUT BENEATH BASEPLATES & STEEL BEAMS TO BE FLOWSET 690 (BY EVERBUILD, TEL. 0113 2402424, OR EQUAL APPROVED).
12. ALL STEELWORK TO BE LINED, LEVELLED & GROUTED PRIOR TO CONSTRUCTING ADJACENT WALL PANELS, CLADDING ETC.
13. ALL FIRE PROTECTION TO NEW STRUCTURE TO BE SPECIFIED BY OTHERS.
14. INTERNAL STEELWORK TO BE BLAST CLEANED TO ISO SA. 2½ AFTER FABRICATION AND RECEIVE MINIMUM DFT OF 80 MICRONS OF A SUITABLE EPOXY ZINC PHOSPHATE PRIMER (E.G. INTERGARD 251, BY CROMADEX, TEL. 0161 848 7056). FINAL FINISH TO BE CONFIRMED BY ARCHITECT. ALL TO BS5493 U.N.O. ON DRAWINGS. STEELWORK IN CAVITIES SHALL RECEIVE ADDITIONAL COAT OF BITUMEN PAINT (E.G. INTERTUF 16 BITUMEN, BY CROMADEX, TEL. 0161 848 7056).
15. EXTERNAL STEELWORK (INCLUDING STEELWORK WITHIN 25mm OF EXTERNAL LEAF) TO BE GALVANISED, UNLESS NOTED OTHERWISE. STEELWORK TO BE BLAST CLEANED TO ISO SA. 2½ WITH G24 ANGULAR IRON GRIT AFTER FABRICATION, AND GALVANISED IN ACCORDANCE WITH BS EN 1461 & BS EN 14713. STEEL MEMBERS WITH PLATE THICKNESS LESS THAN 6mm TO HAVE 100 MICRONS & STEEL MEMBERS WITH PLATE THICKNESS GREATER THAN 6mm TO HAVE 140 MICRONS.
16. ALL TIMBER TO TIMBER CONNECTIONS TO BE FORMED USING SUITABLE STEEL BRACKETS, CLIPS, HANGERS ETC, INSTALLED IN ACCORDANCE WITH THE MANUFACTURERS SPECIFICATION (BY SIMPSON STRONG-TIE, TEL. 01827 255600, OR EQUAL APPROVED), UNLESS NOTED OTHERWISE.
17. MULTIPLE TIMBERS FORMING PRINCIPAL SUPPORT BEAMS (E.G. TRIMMERS) TO BE BOLTED TOGETHER WITH M12 (GR8.8) BOLTS @ MAXIMUM 600mm ALONG THE SPAN UNLESS NOTED OTHERWISE.
18. PRINCIPAL STRUCTURAL TIMBERS TO HAVE TRADITIONAL HALVING JOINTS ABOVE INTERNAL SUPPORTS UNLESS NOTED OTHERWISE.
19. ALL PADSTONES TO BE Min. 440 x 215 x 100, 20N/mm²
20. ALL DIMENSIONS TO BE CONFIRMED ON SITE BY CONTRACTOR

DESCRIPTION	Org.	Ch'd	App'd	Auth.
FIRST ISSUE				

THE MINER'S RESCUE STATION

TYP. MEZZANINE FLOOR PLAN & CONNECTION DETAILS

5078-BRP-XX-XX-DR-C-0022

ORIGINATOR:	DATE:	SCALE @ A1:	SUITABILITY:	REVISION:
IG	14.10.24	1:50	S2	P01

Bingham Rawlings Partnership Limited
Consulting Civil & Structural Engineers
Jones Suite
2 Grosvenor Road,
Wrexham, LL11 1BU
Telephone:(01978) 353522
e-mail : consult@brp2000.co.uk

BRP
BINGHAM RAWLINGS PARTNERSHIP