



External ATM

Size and proportions of ATM to stay as they are. ATM should be internally illuminated and designed with the new colours and logo.

For the insert boards the recommended route would be having no copy at all and that rectangle is in plain navy blue.

Core Red

#F9383D
0, 87, 69, 2032 C

Core Blue


#011546
100, 90, 40, 40282 C




Standard External Surround
Note: Top of adjacent ATM shrouds must always line through on elevation.



Slim Base External Surround
May be used as an alternative, where an obstruction below the surround, such as window sill or mullion prevents the installation of a Standard Surround.

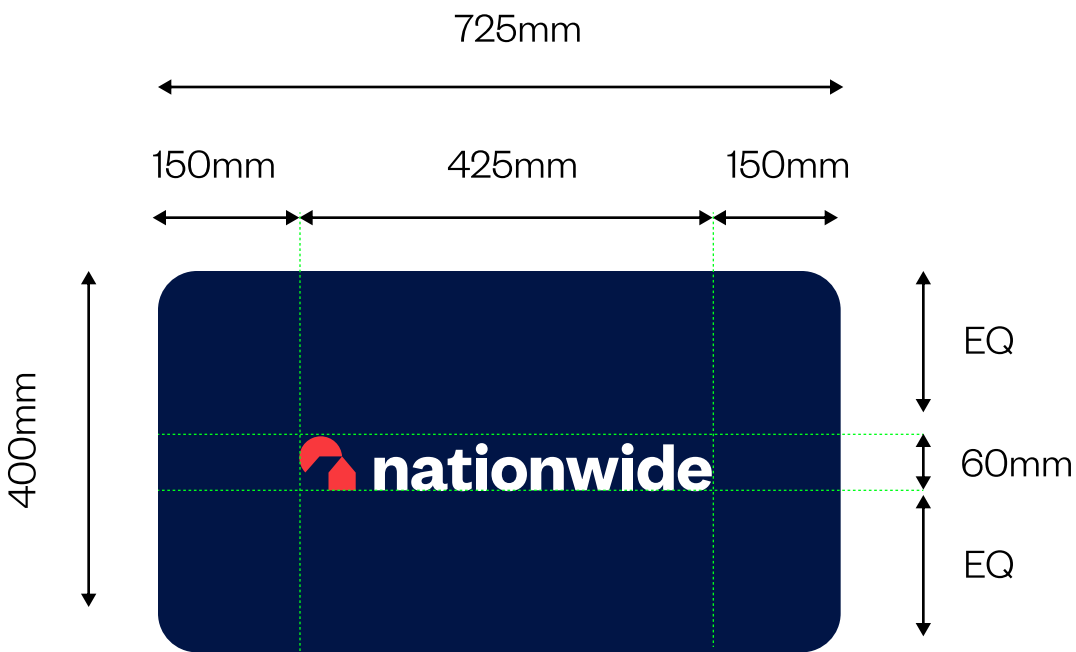

ATM Tablet
May be used, by exception, wall or glazing mounted 100mm above an existing external ATM apperture, where a full surround is not achievable due to lack of suitable space, e.g. Heritage shopfront.

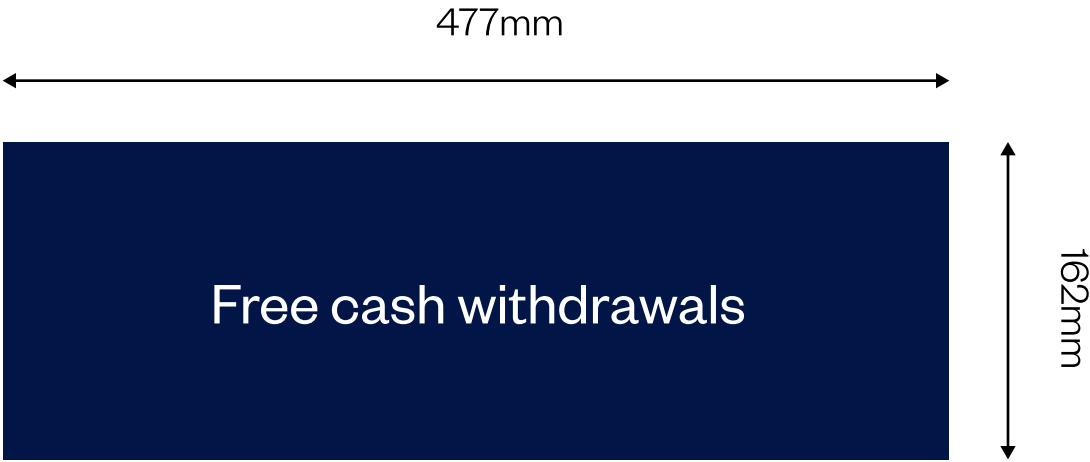

Insert Board
Font: Founders Grotesk
Size: 80 pt
Centrally Aligned