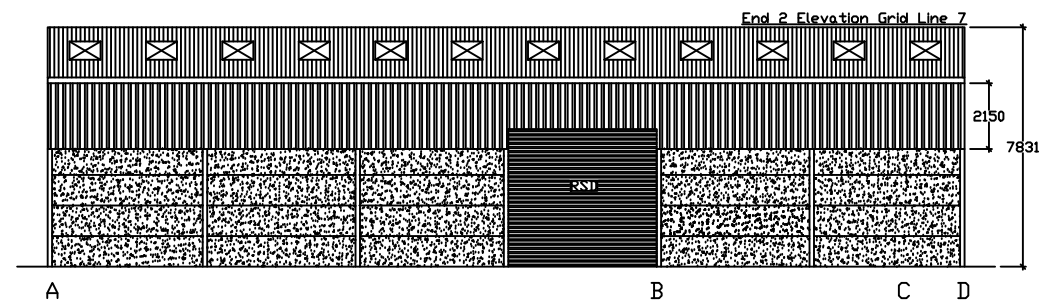
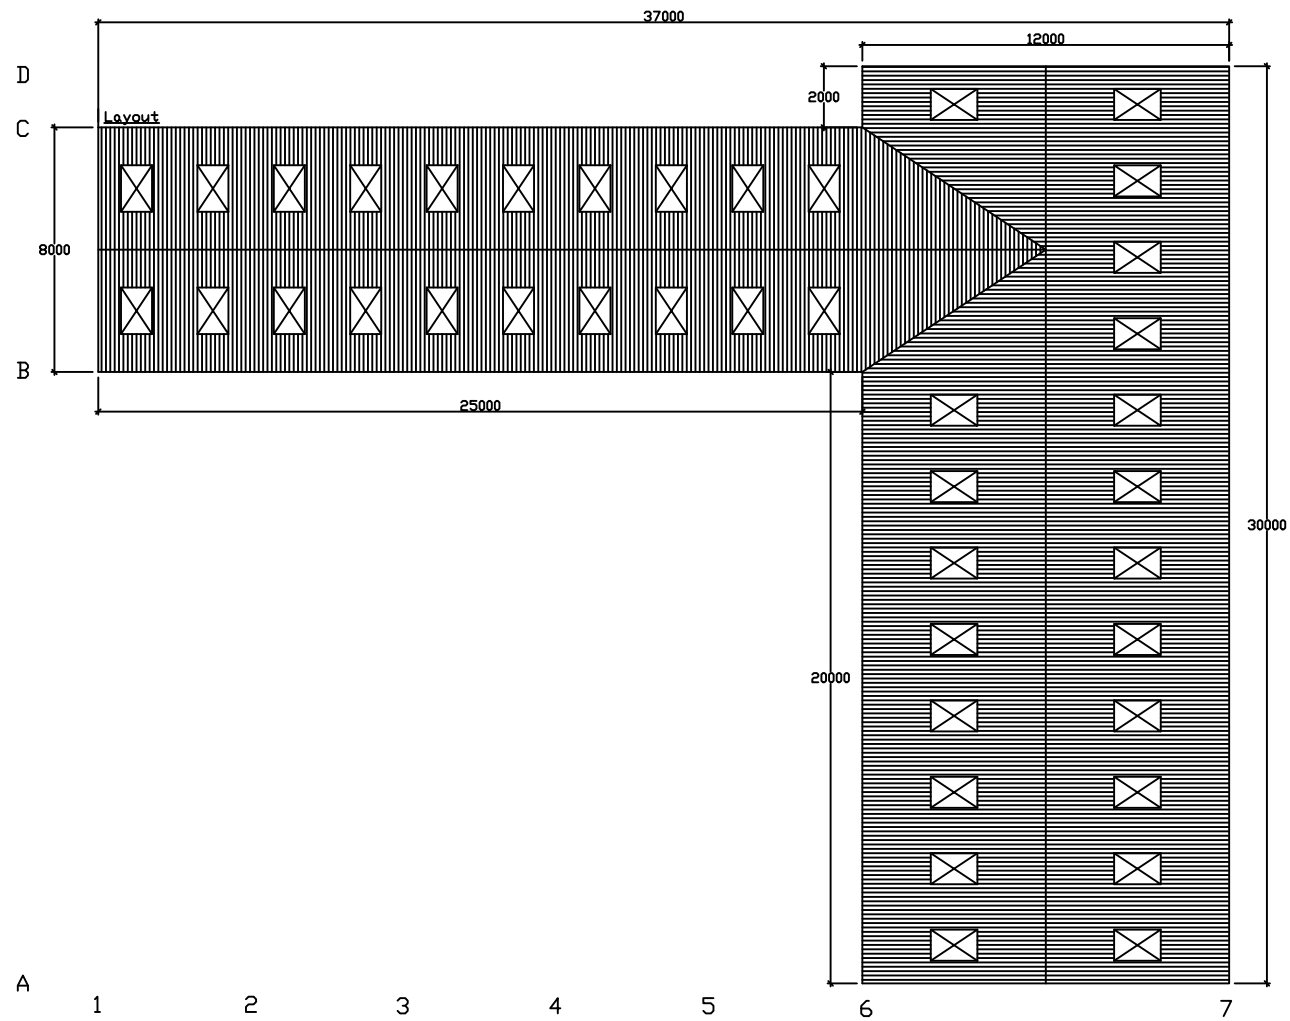
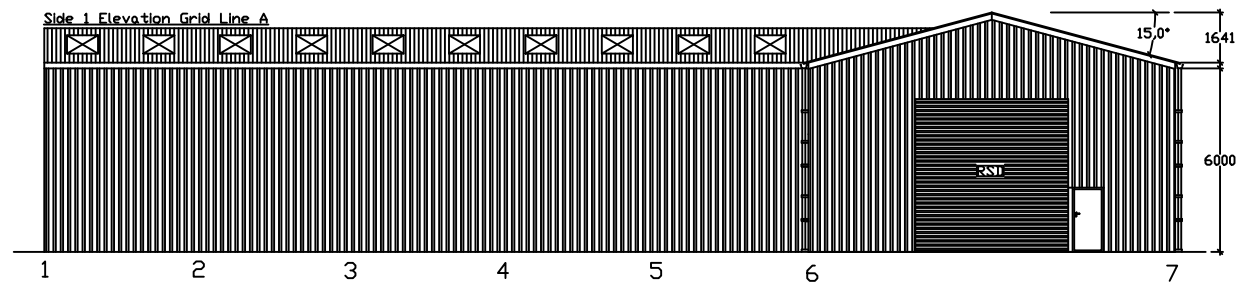
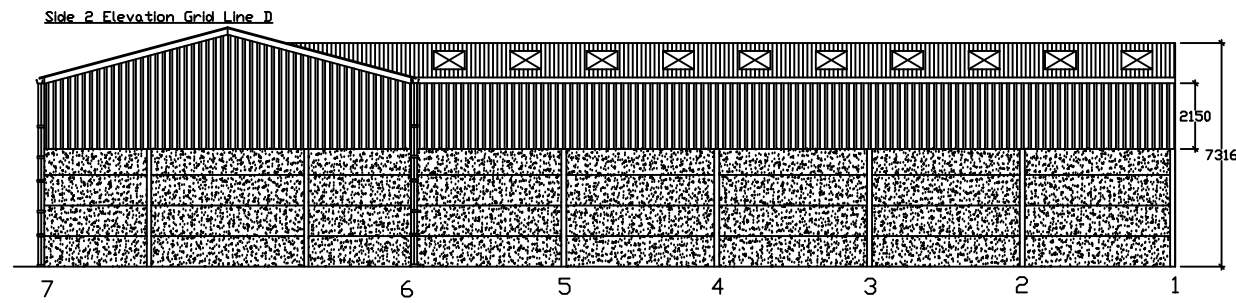


Specification

Length: 25m (82' 0")
Width: 8m (26' 2")
Eaves Height: 6.000m (19' 8")
Roof Pitch: 15°
Bay Size: All bays are the same size at 5m, end bays reduced to achieve overall length.

Steelwork (including web stiffeners and rafter stays)
To supply for erection on prepared site and concrete foundations, steel frame 5m (16') centres with UB 305 x 165 x 40 stanchions and UB 254 x 146 x 31 rafters. Roof bracing to one end. Side bracing and CHS eaves ties. To be 2 gable posts (UB 254 x 146 x 31).
Holding down bolts, templates, cones, and washers included.
All steelwork to be Painted, other colours available.

Purlins
To supply 177 16 - Steel purlins bolted to frame at 1.525m. Eaves beams (Galvanised Steel).

Roof Cladding
To supply Composite Panel - 80 mm laid in accordance with manufacturer's instructions. Ridge to be Closed Ridge.

Roof Lights
Incorporate 20 roof lights of size 3.048m, in roof cladding positioned to suit customer's requirements.

Rainwater Goods
Building Side 1: Trirline with 2 x 110 Diameter down-pipes and rubber sealed joints.
Building Side 2: Trirline with 2 x 110 Diameter down-pipes and rubber sealed joints.

Cladding
Gable End 1: To be clad down 6m below eaves with Box Profile - .5 PVC on 177-16 steel rails.
Gable End 2: To be clad down square to eaves with Box Profile - .5 PVC on 177-16 steel rails.
Side 1: To be clad down 2.150m below eaves with Box Profile - .5 PVC on 177-16 steel rails.
Side 2: To be clad down 6m below eaves with Box Profile - .5 PVC on 177-16 steel rails.

Concrete Panels
Side 1: 170mm x 1000mm thick concrete panels, to a height of 4m.

Doors
Door 1 is a 5m wide and 5m high Roller Shutter Door - Manual plain Galv located Gable End 1 - Centre Offset.
Door 2 is a 1m wide and 2.1m high Steel Personnel Door factory primed located Gable End 1 - Centre Offset.

Building Specification

Length: 30m (98' 5")
Width: 12m (39' 4")
Eaves Height: 6.000m (19' 8")
Roof Pitch: 15°
Bay Size: All bays are the same size at 5m, end bays reduced to achieve overall length.

Steelwork (including web stiffeners and rafter stays)
To supply for erection on prepared site and concrete foundations, steel frame 5m (16') centres with UB 254 x 146 x 31 stanchions and UB 254 x 146 x 31 rafters. Roof bracing to one end. Side bracing and CHS eaves ties. To be 4 gable posts (UB 254 x 146 x 31).
Holding down bolts, templates, cones, and washers included.
All steelwork to be Painted, other colours available.

Purlins
To supply 177 16 - Steel purlins bolted to frame at 1.525m. Eaves beams (Galvanised Steel).

Roof Cladding
To supply Composite Panel - 80 mm laid in accordance with manufacturer's instructions. Ridge to be Closed Ridge.

Roof Lights
Incorporate 24 roof lights of size 3.048m, in roof cladding positioned to suit customer's requirements.

Rainwater Goods
Building Side 1: Trirline with 2 x 110 Diameter down-pipes and rubber sealed joints.
Building Side 2: Trirline with 2 x 110 Diameter down-pipes and rubber sealed joints.

Cladding
Gable End 1: To be clad down 2.150m below eaves with Box Profile - .5 PVC on 177-16 steel rails.
Gable End 2: To be clad down 6m below eaves with Box Profile - .5 PVC on 177-16 steel rails.
Side 1: To be clad down 2.150m below eaves with Box Profile - .5 PVC on 177-16 steel rails.
Side 2: To be clad down 6m below eaves with Box Profile - .5 PVC on 177-16 steel rails.

Concrete Panels
Gable End 1: 170mm x 1000mm thick concrete panels, to a height of 4m.
Side 1: 170mm x 1000mm thick concrete panels, to a height of 4m.

Doors
Door 1 is a 5m wide and 5m high Roller Shutter Door - Manual plain Galv located Gable End 1 - Centre.
Door 2 is a 1m wide and 2.1m high Steel Personnel Door factory primed located Gable End 1 - Centre Offset.
Door 3 is a 5m wide and 4.5m high Roller Shutter Door - Manual plain Galv located Side 1 - Offset To Post.

