
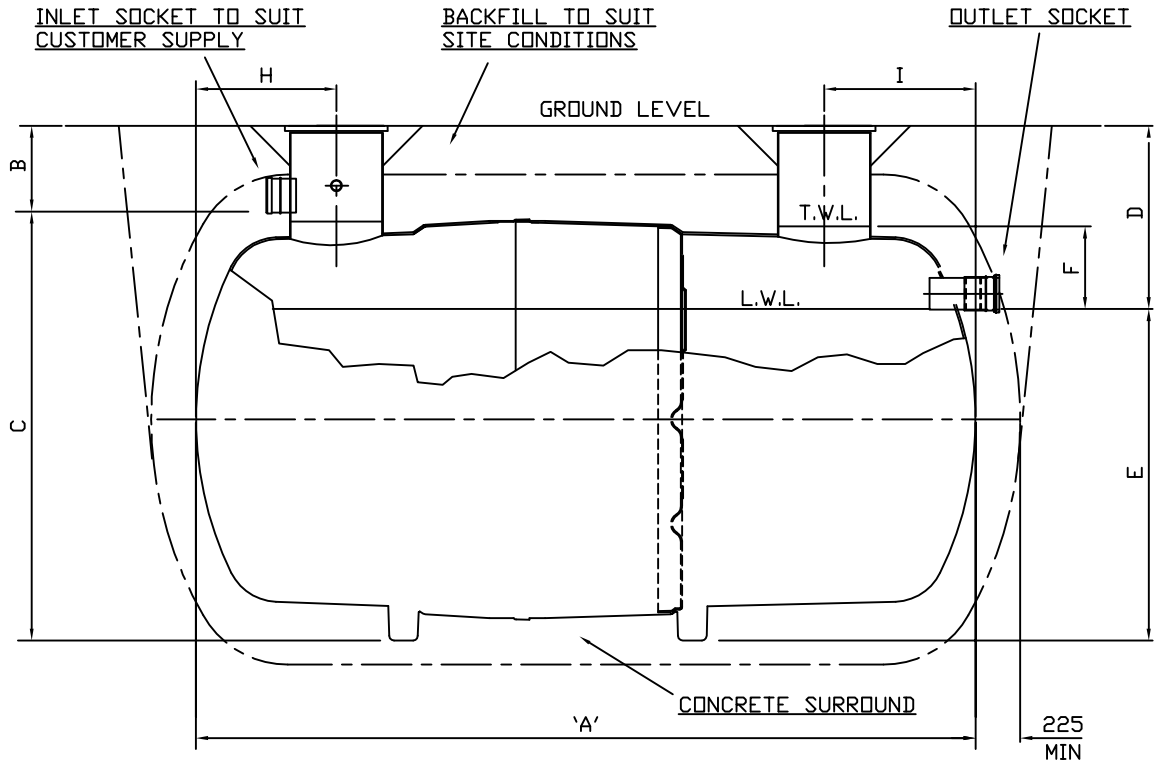


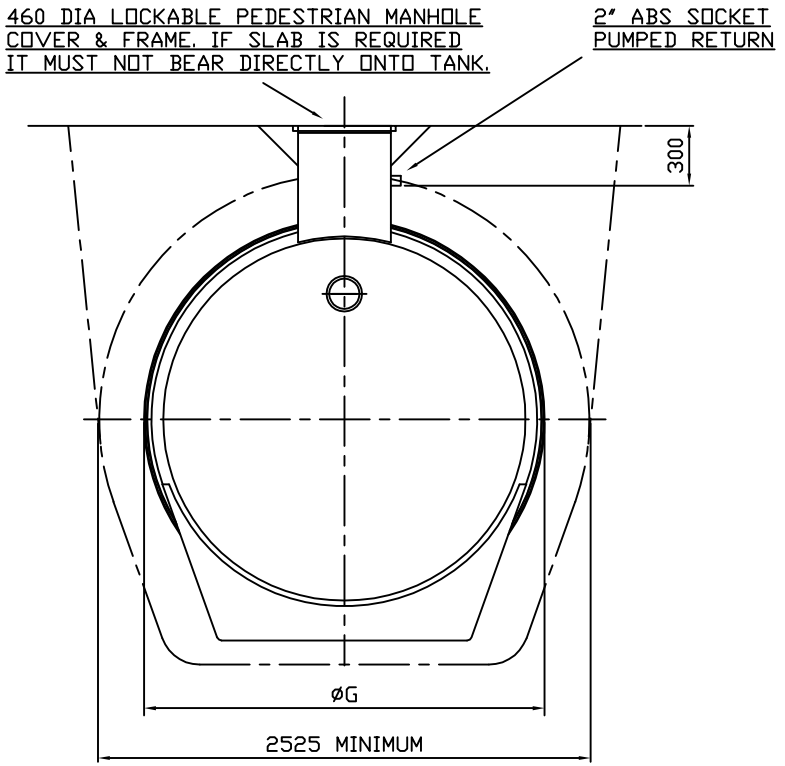

NOTES:-

1. STANDARD INLET & OUTLET PIPES ARE ø160 (6") PVCu UNDERGROUND DRAINAGE TO BS4660. FOR OTHER PIPE SIZES AND OPTIONS AVAILABLE PLEASE CONSULT KEE PROCESS Ltd.

2. IT IS ESSENTIAL THAT THIS DRAWING IS READ IN CONJUNCTION WITH DATA SHEET PD0110 (SUPPLIED WITH UNIT) GIVING INSTALLATION DETAILS. THIS DRAWING SHOULD BE USED FOR DIMENSIONAL INFORMATION ONLY.

LINKED TO DC/DN 6-11 RBC UNITS.


PRIMARY TANK SIZE	A	B	C	D	E	F	øG	H	I	APPROX BALANCING VOLUME M^3	APPROX WEIGHTS Kgs.
8000 L	3200	430	2155	920	1665	415	2020	700	700	1.11	555
10000 L	3915	430	2155	920	1665	415	2020	710	755	1.36	650
12000 L	4640	430	2155	920	1665	415	2020	750	750	1.62	740
15000 L	5435	430	2155	920	1665	415	2075	720	720	1.89	935

LINKED TO DC/DN 12-15 RBC UNITS.

PRIMARY TANK SIZE	A	B	C	D	E	F	øG	H	I	APPROX BALANCING VOLUME M^3	APPROX WEIGHTS Kgs.
8000 L	3200	430	2155	1220	1365	645	2020	700	700	2.35	555
10000 L	3915	430	2155	1220	1365	645	2020	710	755	2.93	650
12000 L	4640	430	2155	1220	1365	645	2020	750	750	3.52	740
15000 L	5435	430	2155	1220	1365	645	2075	720	720	4.18	935

LINKED TO DC/DN 16-19 RBC UNITS.

PRIMARY TANK SIZE	A	B	C	D	E	F	øG	H	I	APPROX BALANCING VOLUME M^3	APPROX WEIGHTS Kgs.
8000 L	3200	430	2155	1520	1065	945	2020	700	700	3.83	555
10000 L	3915	430	2155	1520	1065	945	2020	710	755	4.79	650
12000 L	4640	430	2155	1520	1065	945	2020	750	750	5.77	740
15000 L	5435	430	2155	1520	1065	945	2075	720	720	6.85	935

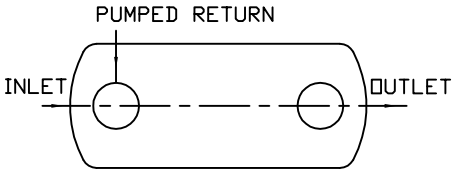

PIPEWORK ORIENTATION

ISSUE	DATE	DRAWN
2	01.06.00	PML
1	25.4.95	COBRA

THIRD ANGLE PROJECTION

ALL DIMENSIONS ARE IN MILLIMETRES – DO NOT SCALE

KEE PROCESS LIMITED
COLLEGE ROAD, ASTON CLINTON, AYLESBURY
BUCKS. HP22 5EZ Tel: (01296) 634500

TITLE

8000–15000 LITRE PRIMARY TANKS FOR USE AS PART OF MODULAR SYSTEM

SCALE	1:20	D.O. REF.	A2

DRAWING No.	ISSUE
800769	2

This drawing is copyright and may not be reproduced or used without the written permission of Kee Process Limited.

KEE PROCESS RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE