PRINTED			05/10/2022 17:55:22		
REV	DESCRIPTION		DATE	BY	CHK
P1	FIRST ISSUE		05/10/2022	ME	DP

DOOR SCHEDULE - TYPE L

REF	TYPE	HEIGHT	WIDTH	COMMENTS
00 - GROUND FLOOR				
D4	INT SINGLE	2110	836	
D5	INT SINGLE	2110	836	
D6	INT SINGLE	2110	760	
D7	INT SINGLE	2110	684	
D8	INT SINGLE	2110	836	
D9	INT SINGLE	2110	760	
XD1	ExtSgl IG X063	2110	1023	
XD2	EXT SINGLE GLAZED	2110	1023	
XD3	DoorExtDbl_Glazed with reveals	2110	1585	
01 - FIRST FLOOR				
D10	INT SINGLE	2110	760	
D11	INT SINGLE	2110	760	
D12	INT SINGLE	2110	760	
D13	INT SINGLE	2110	760	
D14	INT SINGLE	2110	760	
D15	INT SINGLE	2110	760	
02 - SECOND FLOOR				
D16	INT SINGLE	2110	836	ANGLED DOOR
D17	INT DOUBLE	1710	1142	
D18	INT SINGLE	2110	836	ANGLED DOOR

ALL GLAZING BETWEEN FFL AND 800MM IN WALLS AND PARTITIONS AND BETWEEN FFL AND 1500MM IN A DOOR OR IN A SIDE PANEL CLOSE TO EITHER EDGE OF THE DOOR SHALL BE LAMINATED (NOT TOUGHENED) GLASS AS DEFINED IN BS6206:1981. SAFETY GLAZING TO BE PERMANENTLY MARKED TO COMPLY WITH BS 6206:1981.


WINDOW SCHEDULE - TYPE L

REF	TYPE	WIDTH	HEIGHT	COMMENTS
00 - GROUND FLOOR				
W1	1585 x 1510	1585	1510	
W2	1585 x 1510	1585	1510	
W3	1247.5 X 1060	1248	1060	
W4	562.5 x 1210	563	1210	
W5	562.5 x 1210	563	1210	
01 - FIRST FLOOR				
W6	1135 X 1210	1135	1210	
W7	910 x 1060	910	1060	OBSCURE
W8	1135 X 1210	1135	1210	
W9	1247.5 X 1211	1248	1210	
W10	1247.5 X 1060	1248	1060	OBSCURE
W11	1247.5 X 1211	1248	1210	OBSCURE
02 - SECOND FLOOR				
W12	910 x 1210	910	1210	
W13	910 x 1210	910	1210	
ROOF				
W14	GGL Integra size 660x978 (fK04)	660	978	
W15	GGL Integra size 660x978 (fK04)	660	978	
W16	GGL Integra size 660x978 (fK04)	660	978	


NOTE: BACKGROUND VENTILATION TO BE 8000 SQ MM TO HABITABLE ROOMS, 4000 SQMM TO BATHROOMS AND UTILITIES. WHICH IS TO BE PROVIDED BY THE WINDOW AND EXTERNAL DOOR TRICKLE VENTS. GROUND FLOOR DOORS TO HABITABLE ROOMS AND ROOMS CONTAINING A WC TO HAVE A MINIMUM CLEAR OPENING OF 800MM WHEN NOT APPROACHED HEAD ON AND 750MM FINISHED GAP AT THE BOTTOM TO PROVIDE REQUIRED BACKGROUND VENTILATION (PROVIDE A 20MM UNFINISHED GAP WHERE FINISHES ARE NOT LAID). ALL CYLINDER DOORS TO BE VENTED EQUIVALENT TO 600MM2.

WALL TYPES

EXTERNAL WALL
BRICK OR RENDER ON LAY-LITE BLOCK OUTER LEAF, 125MM CAVITY FILLED WITH SLIPABEAD INSULATION (K-0.033), 100MM THERMALITE TURBO BLOCK, PLASTERBOARD ON DABS. U-VALUE = 0.20 W/M²K. IF USING THERMALITE 7N BLOCK THEN U-VALUE IS 0.21 W/M²K




PARTY WALL
125MM FILLED/CLEAR CAVITY WITH EACH SIDE:
- 100MM BLOCKWORK
- 12.5MM PLASTERBOARD ON DABS WITH SKIM FINISH




INTERNAL LOADBEARING WALL (REFER TO ENGINEERS DETAILS)
- 100MM BLOCKWORK & 12.5MM PLASTERBOARD ON DABS WITH SKIM FINISH TO BOTH SIDES




INTERNAL NON-LOADBEARING WALL
- TIMBER STUDS (75X38 @ 600CTRS INDICATED)
- 75MM ISOVER ACOUSTIC PARTITION ROLL (ONLY WHERE INDICATED)
- WALL FINISHED BOTH SIDES WITH 1NO. LAYERS OF 12.5MM PLASTERBOARD AND SKIM FINISH UNLESS TILED.



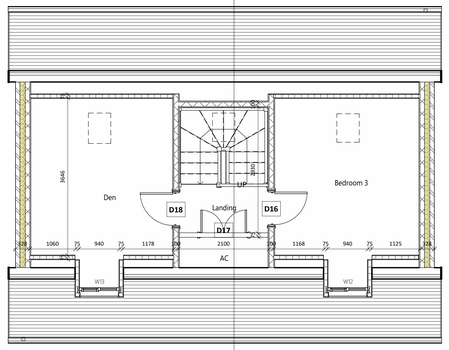


02 SECOND FLOOR STRUCTURAL

SCALE: 1 : 50

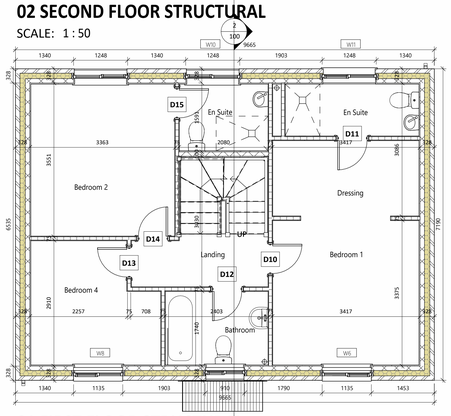

01 FIRST FLOOR STRUCTURAL

SCALE: 1 : 50

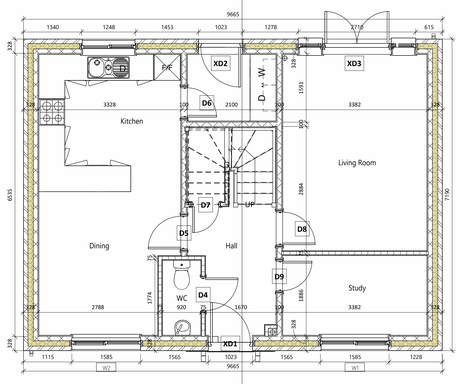

00 GROUND FLOOR STRUCTURAL

SCALE: 1 : 50




FRONT ELEVATION

SCALE: 1 : 50


REAR ELEVATION

SCALE: 1 : 50

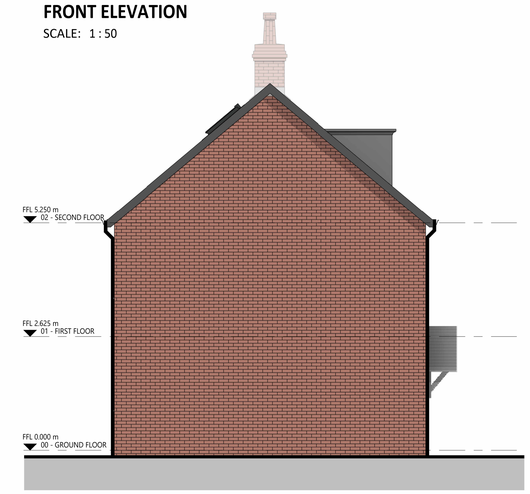


LH GABLE ELEVATION

SCALE: 1 : 50

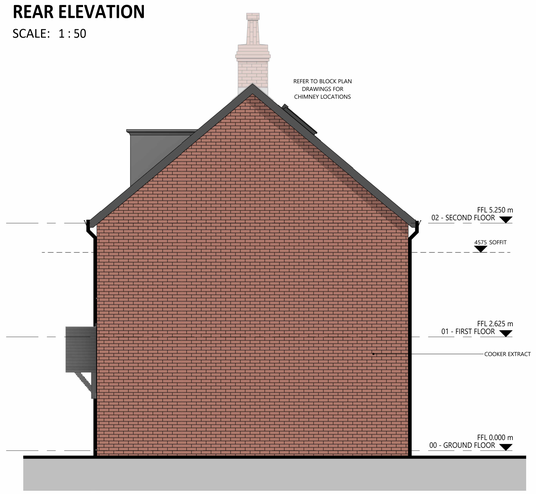

RH GABLE ELEVATION

SCALE: 1 : 50

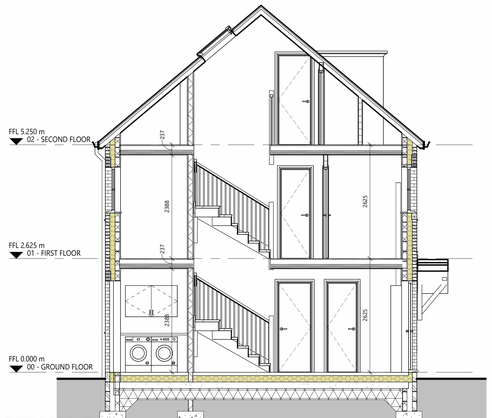

SECTION A-A

SCALE: 1 : 50

saer architects

www.saer.wales | 01492 472478 | studio@saer.wales

THIS DRAWING IS COPYRIGHT OF SAER ARCHITECTS LIMITED. CHECK ALL DIMENSIONS ON SITE. DISCREPANCIES TO BE NOTIFIED TO ARCHITECT. DRAWING TO BE READ IN CONJUNCTION WITH ALL RELEVANT CONSULTANTS FINAL DESIGN TO STRUCTURAL ENGINEERS DETAILS AND SPECIFICATION. DO NOT SCALE FROM DRAWING. WORK TO FIGURED DIMENSIONS ONLY.

PROJECT:
WREXHAM ROAD,
RHOSTYLLEN

CLIENT:
S.G. ESTATES

DRAWING TITLE:
TYPE L MASTER

DRAWING STATUS:	STATUS:
FOR COMMENTS	S3
DRAWING No:	PROJECT No:
WRR-SAL-LT-ZZ-DR-A-0100	P1156
SCALE:	REVISION:
1 : 50@A0	P1