
REFERENCE	FLOWRATE	TOTAL EXTERNAL PRESSURE (STATIC)	MANUFACTURER	RANGE	MODEL	DIMENSIONS (WXDXH)	ELECTRICAL	FILTERS	WEIGHT	SPEED CONTROLLED SFP	CONTROLS
	m^3/s	Pa				mm			kg	W/l/s	
MVHR01	0.3	150	MITSUBISHI	LOSSNAY	LGH200RVXTE	1980x1500x500	230/50/1	G4	159	0.75	WALL MOUNTED CONTROL
MVHR02	0.08	150	MITSUBISHI	LOSSNAY	LGH65RVXE	908x954x404	230/50/1	G4	38	0.69	WALL MOUNTED CONTROL
MVHR03	0.08	150	MITSUBISHI	LOSSNAY	LGH65RVXE	908x954x404	230/50/1	G4	38	0.69	WALL MOUNTED CONTROL
EF01	0.042	100	NUAIRE	DAVE	DE1	605x559x233	230/50/1	N/A	27	0.5	CEILING MOUNTED, PIR CONTROL.
EF02	0.036	100	NUAIRE	DAVE	DE1	605x559x233	230/50/1	N/A	27	0.5	CEILING MOUNTED, PIR CONTROL.
EF03	0.03	100	NUAIRE	DAVE	DE1	605x559x233	230/50/1	N/A	27	0.5	CEILING MOUNTED, PIR CONTROL.
EF04	0.024	100	NUAIRE	DAVE	DE1	605x559x233	230/50/1	N/A	27	0.5	CEILING MOUNTED, PIR CONTROL.

GRILLE SCHEDULE					
REF	VOL. L/S	MODEL	DUCT SIZE (Dia / mm)	GRILLE SIZE (mm)	PLENUM
SG01	159	JSC/250	250Ø	250Ø	NO
SG02	250	GSL4 (4SLOT)	350x250	2000(L)	YES
EG01	30	GX200	150Ø	200Ø	NO
EG02	6	GX150	150Ø	150Ø	NO
EG03	30	GX200	150Ø	200Ø	NO
EG04	250	GSL4 (4SLOT)	350x250	2000(L)	YES
L01	450	800X400	400x250	WGF75VM	NO

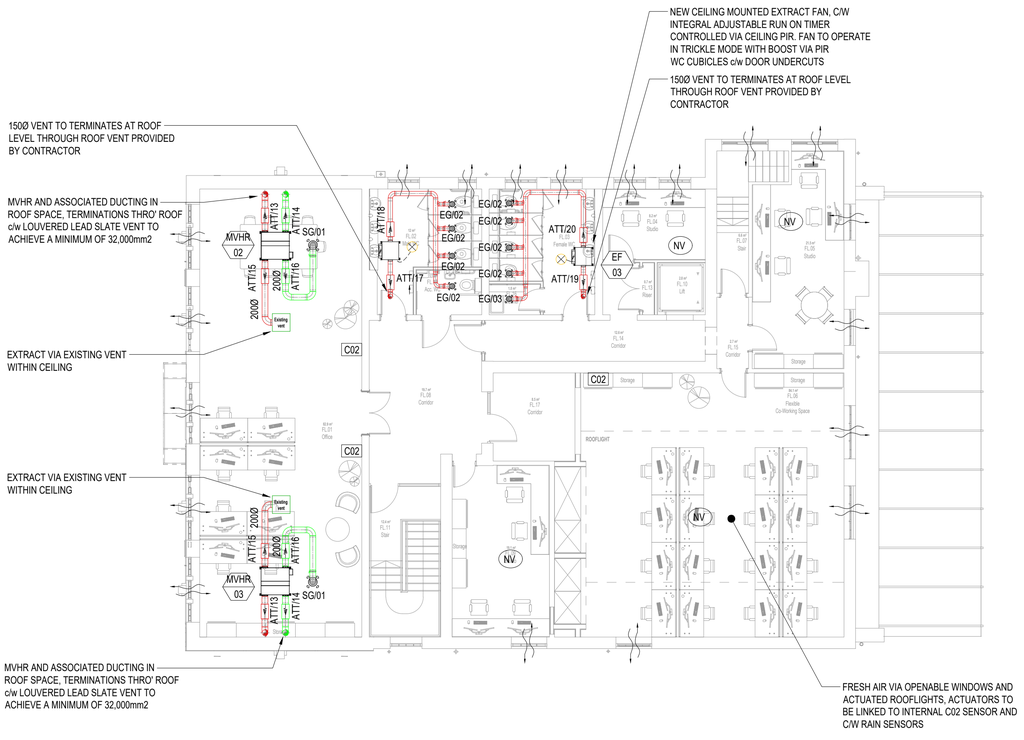

LEGEND	
SYMBOL	DESCRIPTION
	SUPPLY GRILLE
	EXTRACT GRILLE
	VOLUME CONTROL DAMPER
	FIRE DAMPER
	ATTENUATOR
	SUPPLY DUCTWORK
	EXTRACT DUCTWORK
C	WALL MOUNTED CONTROLLER
	NATURAL VENTILATION PROVIDED VIA OPENABLE WINDOW
UC	DENOTES DOOR TO UNDERCUT BY 80MM FOR SUFFICIENT VENTILATION

This document and its contents are the property of the Purchaser/Employer and Crookes Walker Consulting. They may not be copied or reproduced in any way, in part or whole, without prior written approval of both parties. Violations will result in legal action.
This drawing shall be read in conjunction with the CWC Mechanical and / or Electrical Specification(s).
DO NOT SCALE FROM THIS DRAWING

DESIGNERS RISK ASSESSMENT

REFER TO APPENDIX 1 OF M&E SPECIFICATION FOR DESIGNERS RISK ASSESSMENT SCHEDULE

DRAWING BACKGROUND(S):
WOL-LAW-X-U01-DR-A-061003-P03
Proposed First Floor Plan

GENERAL NOTES:

1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTURAL & STRUCTURAL DRAWINGS.
2. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT BUILDING SERVICES DRAWINGS & THE RELEVANT SECTIONS OF THE SPECIFICATIONS & SCHEDULES.
3. THIS DRAWING IS NOT TO BE SCALED.
4. ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE STATED
5. ANY DISCREPANCIES, ERRORS OR OMISSIONS ARE TO BE CLARIFIED WITH THE RELEVANT ENGINEER AT THE EARLIEST OPPORTUNITY.

VENTILATION

1. DUCTWORK CLASSIFICATION AND AIR LEAKAGE LIMITS SHALL BE LOW PRESSURE - CLASS A.
2. THE MECHANICAL CONTRACTOR SHALL RUN SERVICES SUCH THAT THEY CAN BE SUPPORTED FROM; INTERNAL WALLS AND PARTITIONS; ADDITIONAL SUPPORT CHANNELS INSTALLED BY THE MECHANICAL CONTRACTOR.
3. ALL WORKS SHALL BE IN ACCORDANCE WITH THE BUILDING REGULATIONS PART F AND PART L.
4. ALL DUCTWORK SHALL BE INSTALLED IN ACCORDANCE WITH BESA DW 144 AND MANUFACTURERS RECOMMENDATIONS
5. THERMAL INSULATION SHALL BE PROVIDED TO DUCTWORK GENERALLY THROUGHOUT AS PER THE SPECIFICATION
6. FIRE DAMPERS SHALL BE PROVIDED IN ACCORDANCE WITH THE BUILDING REGULATIONS PART B WHERE DUCTWORK PENETRATES ANY FIRE COMPARTMENTATION WALLS ETC. NO FIRE STRATEGY DRAWINGS HAVE CURRENTLY BEEN RECEIVED BY CWC.

Rev	Date	Description	Eng	Chk
C2	28.03.25	CONSTRUCTION ISSUE	SB	GR
C1	17.03.25	CONSTRUCTION ISSUE	SB	GR
T4	22.11.24	ROOF TERMINATION POSITIONS UPDATED	CC	CE
T3	08.11.24	UPDATED INLINE WITH COMMENTS	CC	CE
T2	16.10.24	UPDATED INLINE WITH LATEST XREF	CC	CE
T1	27.09.24	TENDER ISSUE	CC	CE

CWC crookes walker consulting
Suite 9a, Bloc, 17 Marble Street
Manchester M2 3AW
Tel: 0161 834 9999
The Plaza, Old Hall Street,
Liverpool L3 9QJ
Tel: 0151 600 5409
E-mail: admin@cwcon.co.uk
Website: www.cwcon.co.uk

Client
wrexham COUNTY BOROUGH COUNCIL CYNGOR BWRDEISTREF SIROL wrecsam

Project
WREXHAM OLD LIBRARY REFURBISHMENT

Drawing Title
FIRST FLOOR VENTILATION LAYOUT

Status
CONSTRUCTION

Project No.	Drawn	Scale / Paper Size
3327	CC	1:100 @ A1

Drawing No. 3327-CWC-XX-01-DR-M-5701 Rev. C2