
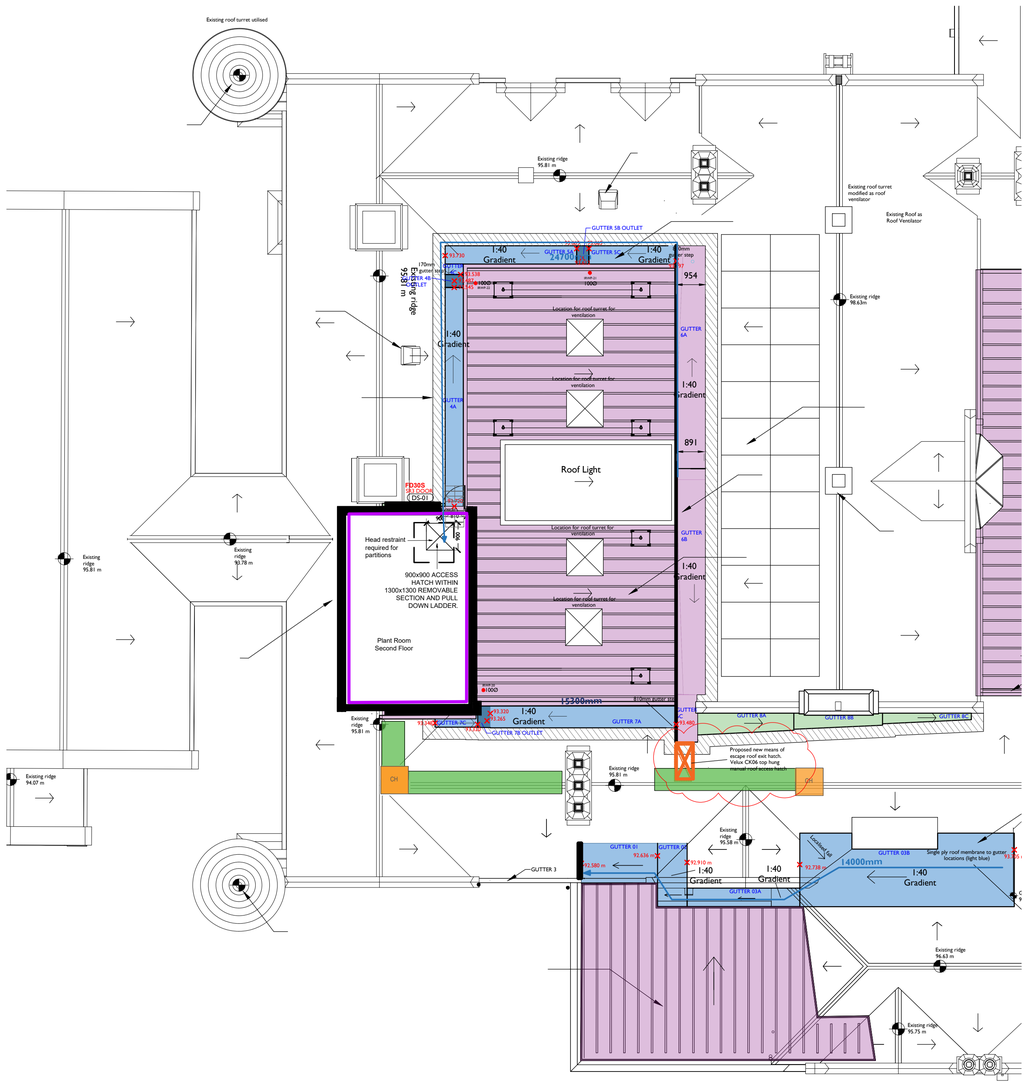


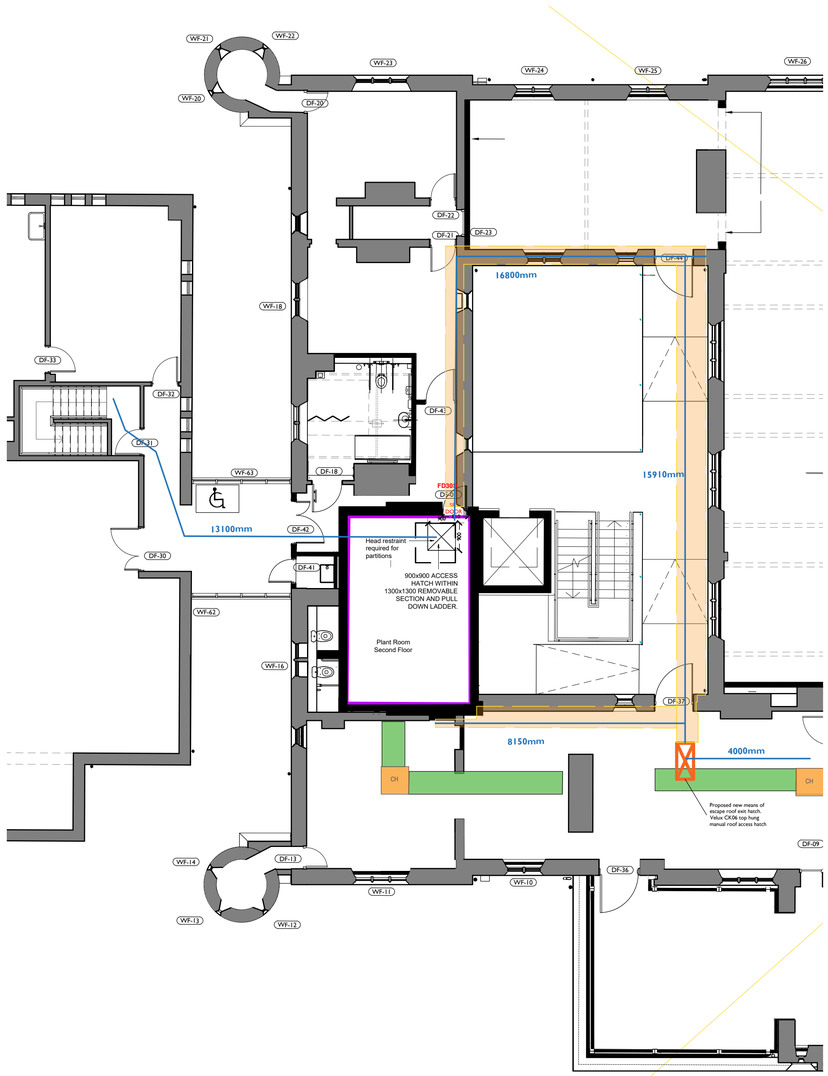

Notes: 21/05/2025 14:57:44

Drawings are based on survey data and may not accurately represent what is physically present.

Do not scale from this drawing. All dimensions are to be verified on site before proceeding with the work.

All dimensions are in millimeters unless noted otherwise.

Purcell shall be notified in writing of any discrepancies.

Key Plan
not to scale



General Notes

Fire Strategy drawings to be read in conjunction with Jensen Hughes Fire Strategy Report and relevant Parker Wilson design information.

For information regarding location of smoke detectors, heat detectors, disabled refuge points, exit signage, emergency lighting, fire alarm panel, fire alarm interfaces and other relevant fire strategy services, refer to Parker Wilson design information.

Fire Strategy is considered to meet the minimum requirements set out in Part B of the Building Regulations.

Provision of firefighting equipment including extinguishers and blankets etc to be confirmed by Fire Risk Assessor through development of the Fire Risk Management Plan.

All existing walls are assumed to achieve close to 60 min. New doors where indicated need to achieve required FR and certification should be provided to confirm.

All new and existing steelwork to have 60min intumescent paint as per NBS M61:110 / 111

Any penetrations or services through fire rated compartment walls, ceilings and floors must have the appropriate fire stopping to ensure continuity of protection and that this compartment works effectively in the event of fire.

Parallel to the line of the fire rated compartment walls, cavity fire barriers need to be installed within the floor void space to ensure continuity of protection within the floor and ceiling structure. Cavity barriers must achieve a minimum fire rating of 60 minutes.

Access to plant room spaces at second floor level to be restricted to trained personnel.

1:100

0 1 m 2 m 3 m 4 m 5 m 10 m

REV C01
- Graphical Change
-removal of lobby in Plant room
-Notes changes

REV	DATE	BY	CHK	DESCRIPTION
C01	10/06/2024	CH	JR	Construction Issue

CLIENT
Haley Sharpe Design Ltd

PROJECT
Wrexham Museum Redevelopment

JOB NUMBER
241084

PURCELL

TITLE
Second Floor, Plant Room - Fire Strategy

SIZE	SCALE	LAST REVISED	DRAWN	CHECKED
A1L	1:100 @ A1	19/09/2023	CH	ZB

REV **C01** SUITABILITY/REASON FOR ISSUE **A5 - Construction Approved**

DRAWING NAME
241084-PUR-00-02-DR-A-2512

1 / 2512 **Proposed Second Floor - Wrexham Museum**
1:100 @ A1

1 / 2512 **Proposed First Floor/Second Floor Hatch Escape Route**
1:100 @ A1

St James', 79 Oxford Street, Manchester, M1 6FQ
© PURCELL 2019. PURCELL ® IS THE TRADING NAME OF PURCELL ARCHITECTURE LTD.