



slate-like
appearance

thin 18mm
leading edge

Riven Edgemere

Edgemere interlocking slates are now available with a riven surface, providing a finish which closely matches the appearance of natural slate. A randomised texture ensures an attractive variegated appearance with depth and tone.

The latest addition to a hugely successful range, Riven Edgemere is an affordable, single lap solution which is easy to install and complemented by a range of ventilation and dry fix systems.


- ✓ Thin 18mm leading edge
- ✓ Riven, slate-like appearance
- ✓ Certified under the BES 6001 standard for responsible sourcing
- ✓ Can achieve an A+ rating in the BRE Green Guide to Specification
- ✓ Carbon footprint – 10.67kg CO₂e/m² (independently certified by the Carbon Trust)




Technical data

Size	420mm x 330mm
Minimum pitch*	22.5° (75mm headlap) 17.5° (100mm headlap)
Maximum pitch	90°
Minimum headlap	75mm (22.5° and above) 100mm (below 22.5°)
Maximum gauge	345mm
Cover width	298mm (nominal)
Hanging length	395mm (nominal)
Covering capacity (net)	9.7 slates/m ² at 75mm headlap 10.5 slates/m ² at 100mm headlap
Weight of slating (approx.)	44 kg/m ² (0.43 kN/m ²) at 75mm headlap 47.5 kg/m ² (0.47 kN/m ²) at 100mm headlap
Battens required (net)	2.9 lin.m/m ² at 75mm headlap 3.1 lin.m/m ² at 100mm headlap
Batten size recommended (fixed to BS 5534)	38 x 25mm for rafters/supports not exceeding 450mm centres 50 x 25mm for rafters/supports not exceeding 600mm centres
Slate nails	45mm x 3.35mm
Fixing clips	Eaves, verge and tile clips
Authority	BS EN 490

* The minimum recommended pitch and lap may be influenced by special circumstances, please refer to the Technical Advisory Service.

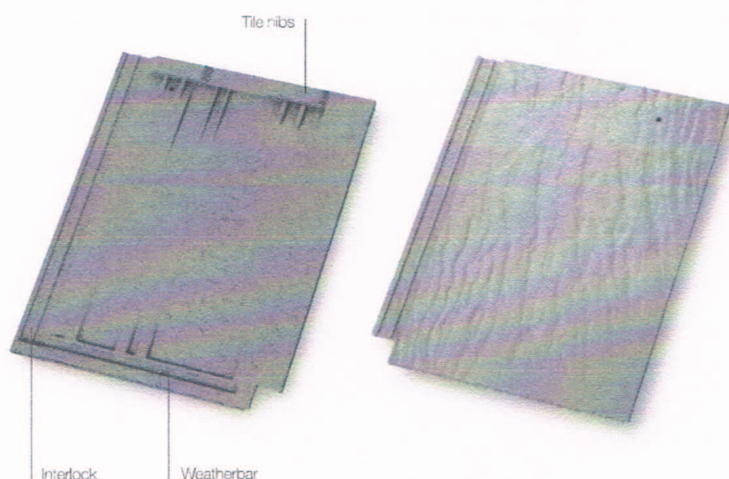

Colour availability

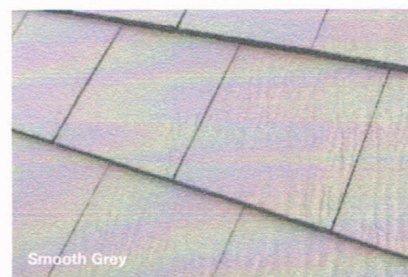

Call **ME** on 01283 722588
 Email at info@marleyeternit.co.uk
 Or visit www.marleyeternit.co.uk/edgemere



an **etex** company

Marley Eternit Limited, Lichfield Road, Branston, Burton on Trent, DE14 3HD