


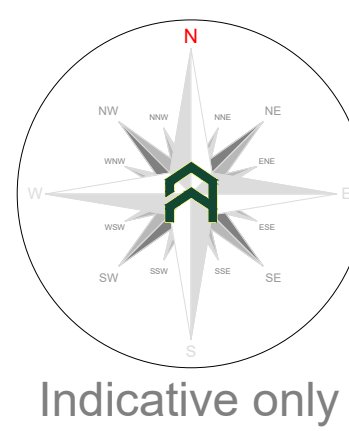

Indicative only

Tree Work Schedule

No.	Species	Works	Category
H01	Various	Prune back by 10% to remove material (as shown on the A55 plan)	C0

All tree work is to be undertaken in accordance with British Standard BS 3998:2010 Tree work - Recommendations.

All ratings are to be removed and the site is to be left as found.

Care is to be taken of the ground around retained trees to make sure that it does not become compacted as a result of tree surgery operations. No equipment or vehicles such as timber forklifts, tractors, excavators or cranes shall be parked or driven beneath the crowns of any retained trees, to prevent subsequent compaction and root death.

Protective Fencing

To be erected prior to the commencement of all works on site, and retained in place throughout construction.

Default specification: To comprise either 2.4m wooden site hoarding or 2.2m high scaffolding framework comprising of vertical and horizontal framework, well braced to resist impacts, with uprights to be spaced at a maximum of 5.0m intervals and driven into the ground by a minimum of 600mm. On to this, standard anti-climb welded mesh panels are to be securely fixed to each other with at least two scaffold clamps and to the scaffold framework with wire.

Secondary Specification: To comprise of 2m tall welded mesh panels on rubber or concrete feet. Panels are to be joined together using a minimum of two anti-tamper couplers, installed so that they can only be removed from inside the fence. The panels should be supported on the inner side by stabiliser struts, which should be attached to a base plate and secured with ground pins.

All weather notices should be erected at regular intervals on the weld mesh panels with words such as "Construction exclusion zone - Keep out".

Tree Protection Area

KEEP OUT

Do not move this fence

(TOWN & COUNTRY PLANNING ACT 1990)

TREES ENCLOSED BY THIS FENCE ARE PROTECTED BY PLANNING CONDITIONS AND ARE THE SUBJECT OF A TREE PRESERVATION ORDER.

CONTRAVENTION OF A TREE PRESERVATION ORDER MAY LEAD TO CRIMINAL PROSECUTION.

ANY INCURSION INTO THE PROTECTED AREA MUST BE WITH THE WRITTEN PERMISSION OF THE LOCAL PLANNING AUTHORITY.

Construction exclusion zone

A construction exclusion zone (CEZ) is a designated area where there is to be no construction activity what-so-ever. Access to the area for construction personnel or machinery is strictly prohibited and there is no scope for materials or waste storage etc.

Arboricultural Supervision

The arboricultural consultant will be required to attend site to directly supervise all demolition and construction works that have to be undertaken within the root protection areas. This will include:

1. Pre-commencement site meeting.
2. Location of protective measures.
3. Any demolition and/or excavations within or adjacent to RPAs, including foundations, hard surfacing or underground services (a non-exhaustive list).
4. Arboricultural sign off and removal of protective measures.

Arboricultural Method Statement

Please refer to ArborTech Consulting Ltd. Tree Schedule and Arboricultural Method Statement, for full details on all surveyed trees and how all aspects of the development might be implemented without detriment to retained trees.

Protective fencing -
Installed for 10m either
side of the works to
allow for sufficient
construction access
space.

CEZ

GROUND LEVEL
+0.00m

BUSHES LEVEL APPROX.
+5.00m A.G.L.

PROPOSED 7No. 600X600 PAVING SLABS

PROPOSED CS 20m HIGH M-RANGE V2 APOLLO POLE

PROPOSED VF 1No. DERBY CABINET

PROPOSED VF 1No. CHESHIRE CABINET

PROPOSED VF 1No. PSC CABINET

PROPOSED CS SFMC266 METER CABINET

H01

CEZ

T01

0m 1m 3m 5m 10m



Unit 3, Well House Barns, Chester, CH4 0DH
https://arbtech.co.uk, 01244 661170

Project: Wrexham Road,
south of Fennant Road,
Rhosllanerchrugog, Johnstown,
Wrexham, LL14 1PA

Client: WHP Telecoms Limited

Drawing: Tree Protection Plan

Based on: 401 Rev A

Drawing No: Arbtech TPP 01

Date: Mar 2024

Scale: 1:50 @ A0

Drawn: EK

Key:

Tree No: T01

Category: B1 trees

CEZ

Arbtech Consulting Ltd. 2024