




Rear Elevation

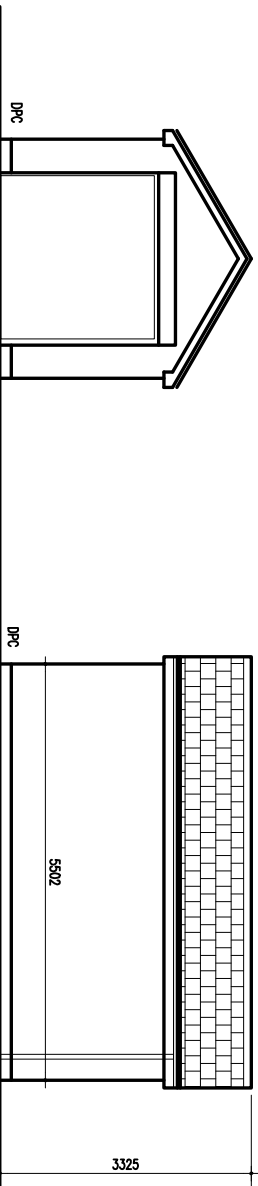

Side Elevation

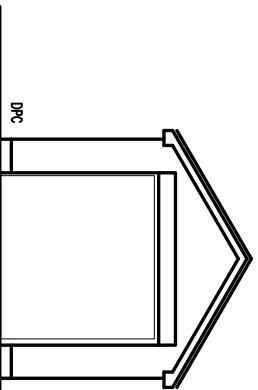

Front Elevation

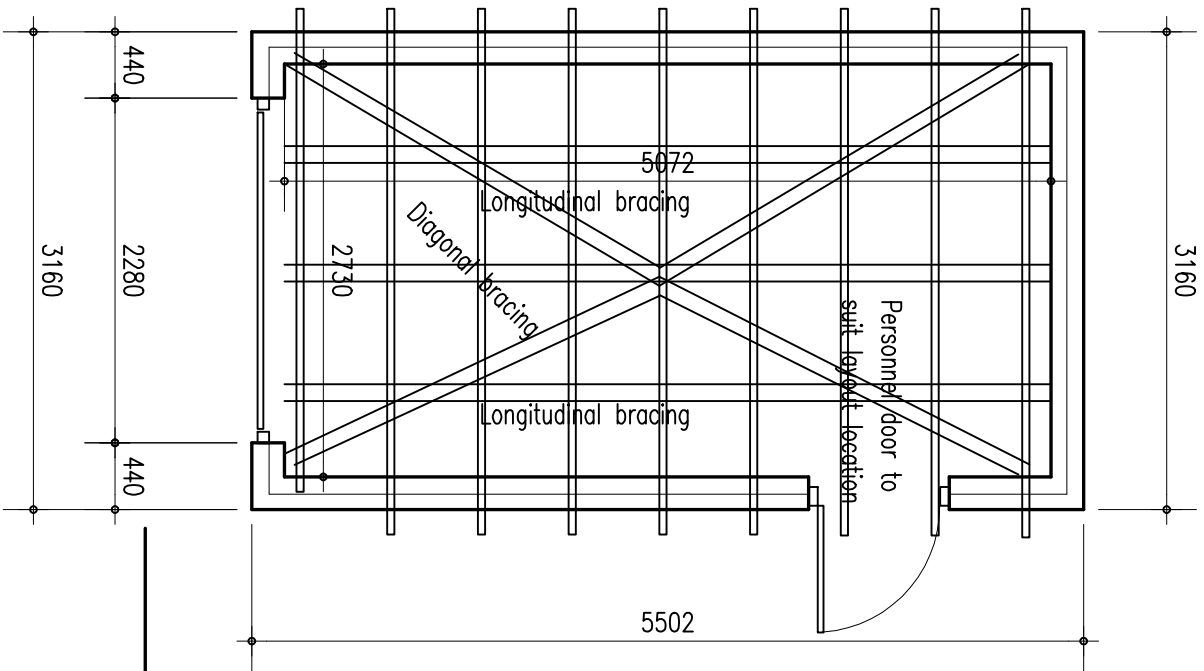

- NOTES :**
- ROOF CONSTRUCTION :**
CONCRETE ROOF TILING
ROOF THUSERS AT 900 C/M.
 - RAINWATER GOODS :**
150 mm x 15 mm GUTTER;
60 x 140 mm x 15 mm PLASTIC DOWN PIPES;
400 mm DOWN PIPES WITH 100 mm DOWN PIPES AT 900 C/M.
 - EXTERNAL WALL CONSTRUCTION :**
100 mm INSULATED BRICK WITH 100 mm EXTERNAL FINISH.
 - GARAGE FLOOR**
150 THICK CONCRETE ON 150 mm POLYSTYRENE DPM ON
10 THICK SAND BLASTED ON 150 THICK WALL COMPACTED
HANDMADE ON SELECTED FILL (ALL PRIVATE FIRM)
 - FOUNDATIONS**
CONCRETE STRIP FOUNDATIONS : SEE STRUCTURAL ENGINEERING DRAW.

