


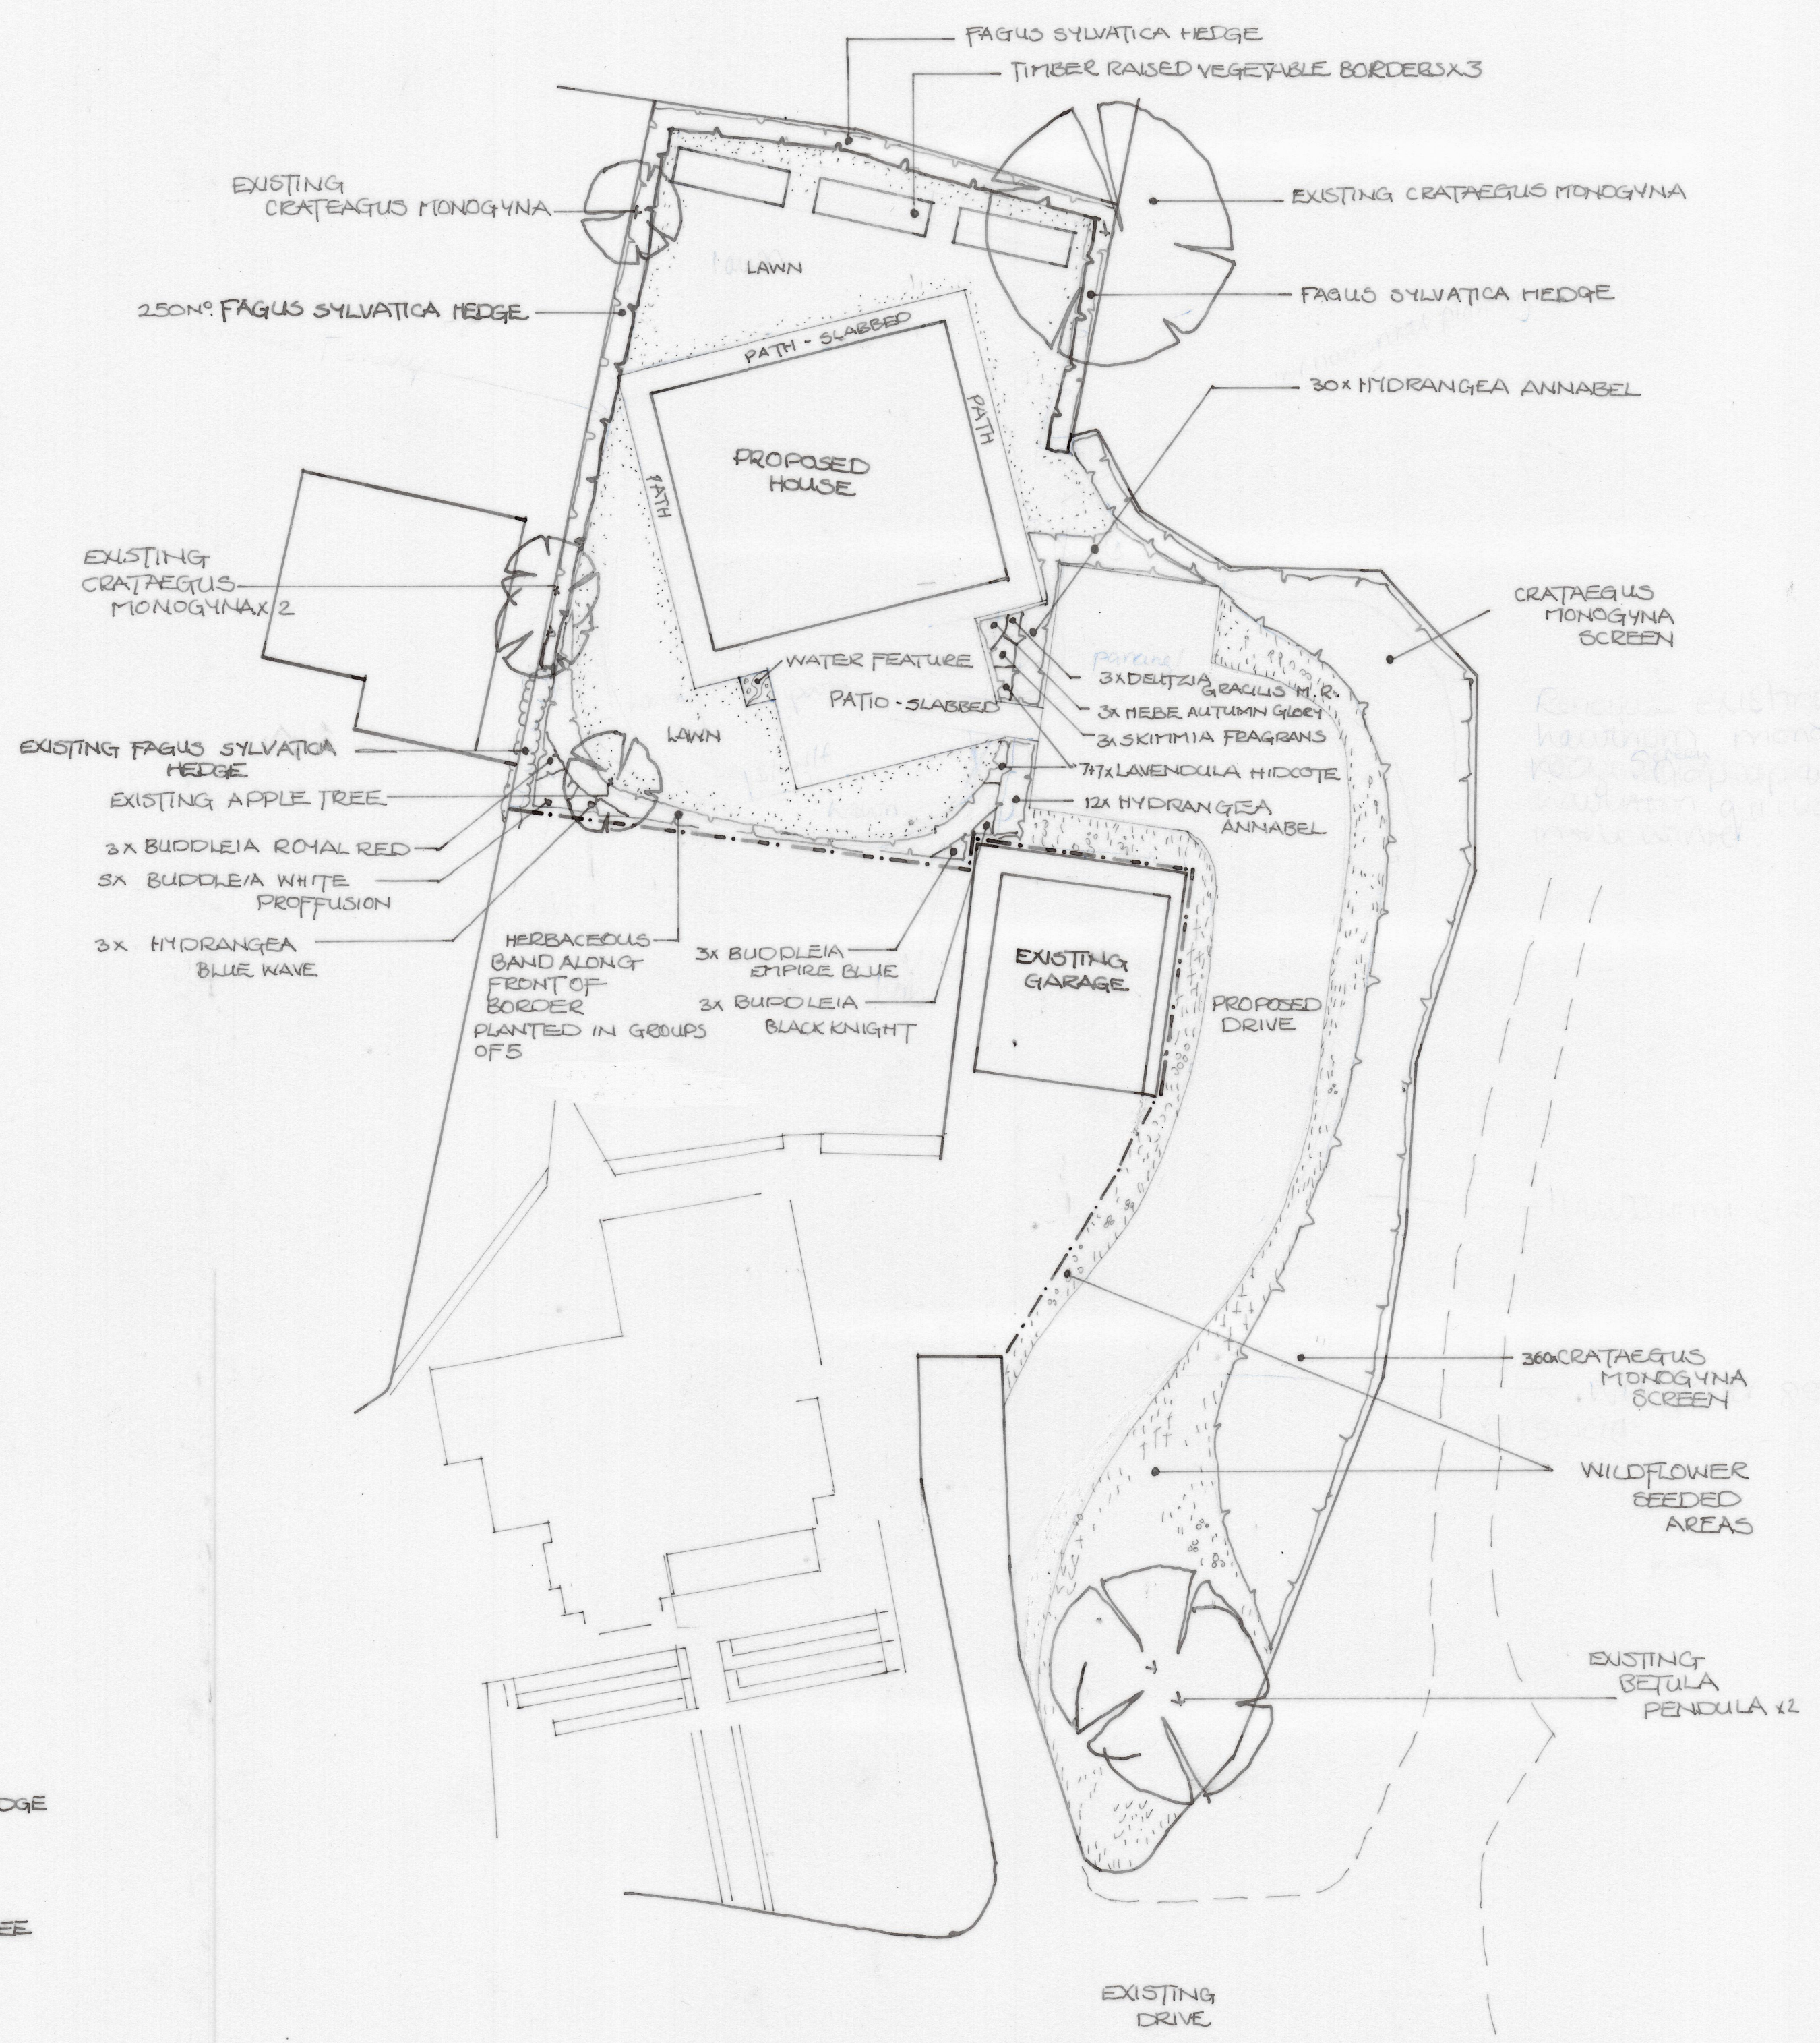

- KEY
- EXISTING HEDGE
 - EXISTING TREE
 - NEW HEDGES
 - NEW PLANTING
 - WILDFLOWER SEED
 - LAWN

SCHEDULE			
HEDGING/SCREEN - COPPICE EXISTING HAWTHORN ON PERIMETER INTERPLANT WITH BARE ROOT WHIPS DURING THE DORMANT SEASON NOV-FEB. PROTECT WITH SPIRAL GUARD & CANE			
360	CRATAEGUS MONOGYNA	60-90	3/1 st
250	FAGUS SYLVATICA	60-90	5/1 st

WILDFLOWER SEED - IE COTSWOLDS WILDFLOWERS MIX 300g MARCH-EARLY MAY, AUGUST, EARLY OCTOBER 25kg/ha

SHRUBS - COMPLY WITH BS 3936 PLANTING TO COMPLY WITH BS 4428			
3	BUDOLEIA BLACK KNIGHT	3L	3/1 st
3	BUDOLEIA EMPIRE BLUE	3L	3/1 st
3	BUDOLEIA ROYAL RED	3L	3/1 st
5	BUDOLEIA WHITE PROFFUSION	3L	3/1 st
3	DEUTZIA GRACILIS	3L	3/1 st
3	HEBE AUTUMN GLORY	2L	3/1 st
14	LAVENDULA HIRCOTE	2L	7/1 st
42	HYDRANGEA ANNABEL	3L	3/1 st
3	HYDRANGEA BLUE WAVE	3L	3/1 st
3	SKIMMIA FRAGRANS	3L	3/1 st

HERBACEOUS			
5	ACHILLEA CERISE	2L	5/1 st
5	ACHILLEA PTA. PEARL	↓	↓
5	AGAPANTHUS HEADBOURN HYBRID		
5	ALCEA HALO MIX		
5	ALCHEMILLA MOLIS		
5	ANEMONE HONOURINE JOUBERT		
5	ANEMONE SEPTEMBER CHARM		
5	ASTER MONCH		
5	ASTER HARRINGTONS PINK		
5	ASTRANTIA VENICE		
5	DELPHINIUM PACIFIC GAYT MIX		
5	ECHINACEA RUBRA		
5	ERYSIMUM BOWLES MAUVE		
5	GERANIUM JOHNSON BLUE		
5	GERANIUM WARGRAVES PINK		
5	Gypsophila panic. white		
5	IRIS GERMANICA EMMA LOUISE		
5	LEUCANTHEMUM BECKY		
5	LUPIN RUSSELL HYBRIDS		
5	NEPETA FASSENII		
5	PERSICARIA BISTORTA		
5	PHLOX BRIGHT EYES		
5	PHLOX PANICULATA BLUE		
5	SALVIA NEM. AMETHYST		
5	SIDALCEA ROSALI		
5	THALICTRUM AQUILEGIFOLIUM		
5	VERBENA BONARIENSIS		
5	VERONICA PURPLEICIOUS		
5	VERONICA LONGIFOLIA CHARLOTTE		

ALL PLANTING TO BE COMPLETED BY THE END OF THE PLANTING SEASON
AND ALL PLANTS THAT HAVE BEEN ORDERED BY THE END OF THE PLANTING SEASON
TO BE DELIVERED WITHIN 14 DAYS OF ORDERING

REBECCA DAKIN LTD
LANDSCAPE DESIGN
DUCKINGTON GRANGE, MALPAS, CHESHIRE. SY14 8LQ
TEL: 01829 782486 MOB: 07746 422416

JOB: ROSEBANK
173 KINGSMILL ROAD
WREXHAM

DRAWING: PLANTING PLAN

DATE: JULY 2022	SCALE: 1:200 ON A1	DWG N°: 188/2	REV:
-----------------------	--------------------------	------------------	------