
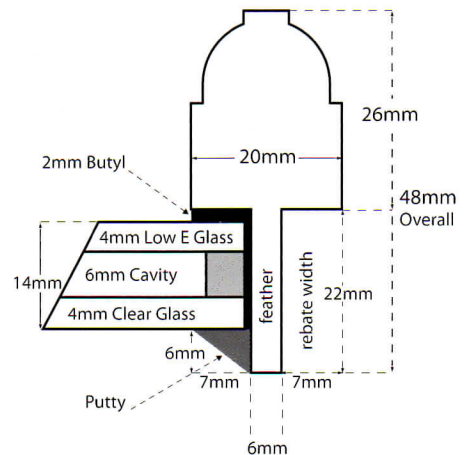
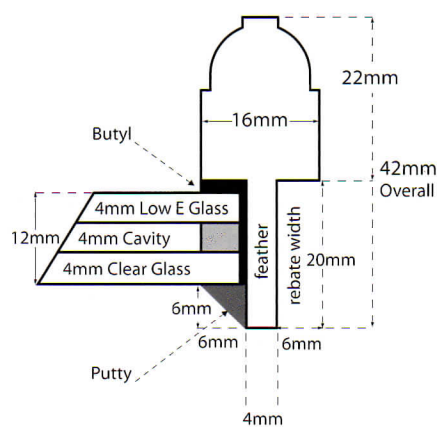
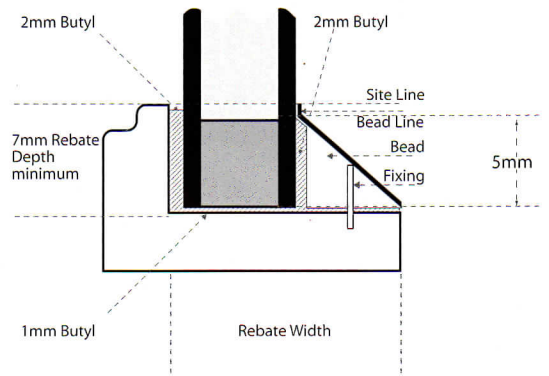
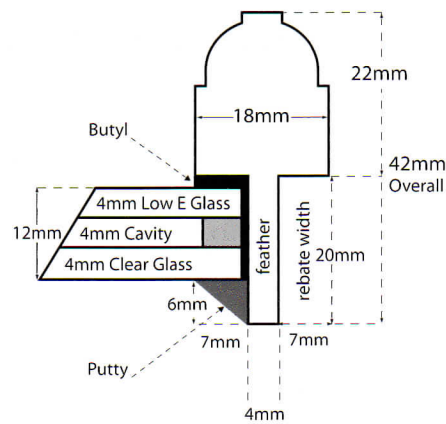
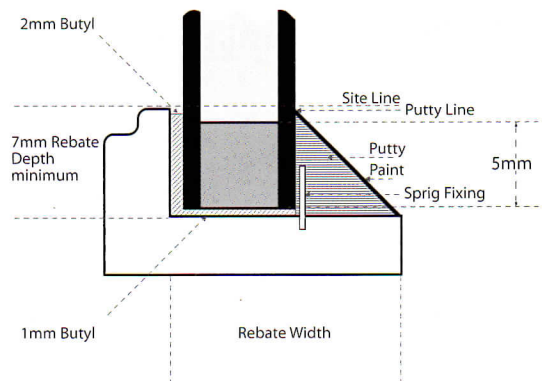


slimlite Self-cleaning Double Glazed Units

- Nominal Cavity Widths: 3.0mm - 4.0mm - 5.0mm - 6.0mm - 8.0mm - 10.0mm. Other cavities and triple cavities on application.
- Standard overall Perimeter Seal Depth - 5.0mm (overall tolerances + or - 1mm)
- Minimum timber rebate depth - 7.0mm

Section Standard astragal or glazing bars with Slimlite (not to scale).

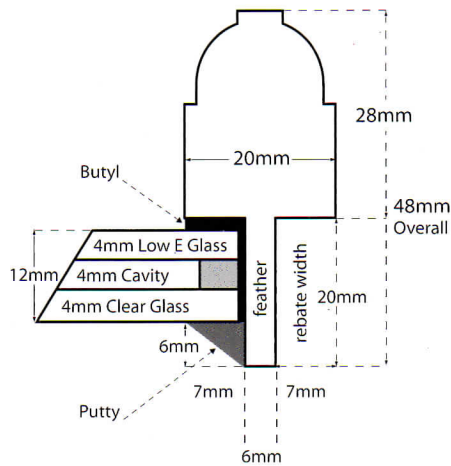

Overall window U Value 1.6

Note

Glazing sizes should be less 2 or 3mm from height and 2 or 3mm from width. Allowance should be made where frame sizes are irregular.