

Project

IONITY
WORK PACKAGE 1 SERVICE

WREXHAM

Client

IONITY GmbH
Moosacher Str. 84
ad-80809 Munich, Germany
www.ionity.eu

Consultant

AECOM
10th Floor, The Clarence West Building
2 Clarence Street West
Belfast
+44 (0) 28 9060 7200
www.aecom.com

Notes


Please refer to the arboricultural tree survey report, schedule and drawings for further details.

General workmanship
All works and temporary tree protection fencing shall be carried out in adherence to best arboricultural practice and in accordance with BS3998 recommendations for tree work and BS5837 trees in relation to design, demolition and construction recommendations.

Operatives should be appropriately skilled and experienced for the type of work holding, or in training to obtain, relevant CITB certificates of competence, or similar.

All works should comply with HSE/arboriculture and forestry advisory group best practice.

Site operatives and general public should be protected from hazards associated with tree felling during the course of the works, through appropriate working methods.

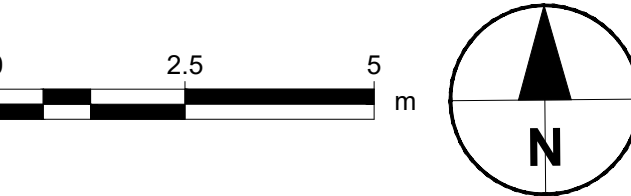

Issue/Revision

P01	MAR 23	PLANNING ISSUE	LM/PM/PM
Rev.	Date	Description	Dm/Chk/Apr

Key Plan

Purpose Of Issue

PLANNING

Project Number

60695026

Sheet Title


LANDSCAPE LAYOUT
NORTHERN CAR PARK

Sheet Number

ACM-WRE-00-DR-LA-1001

Scale: 1:100@A1

Rev: P01

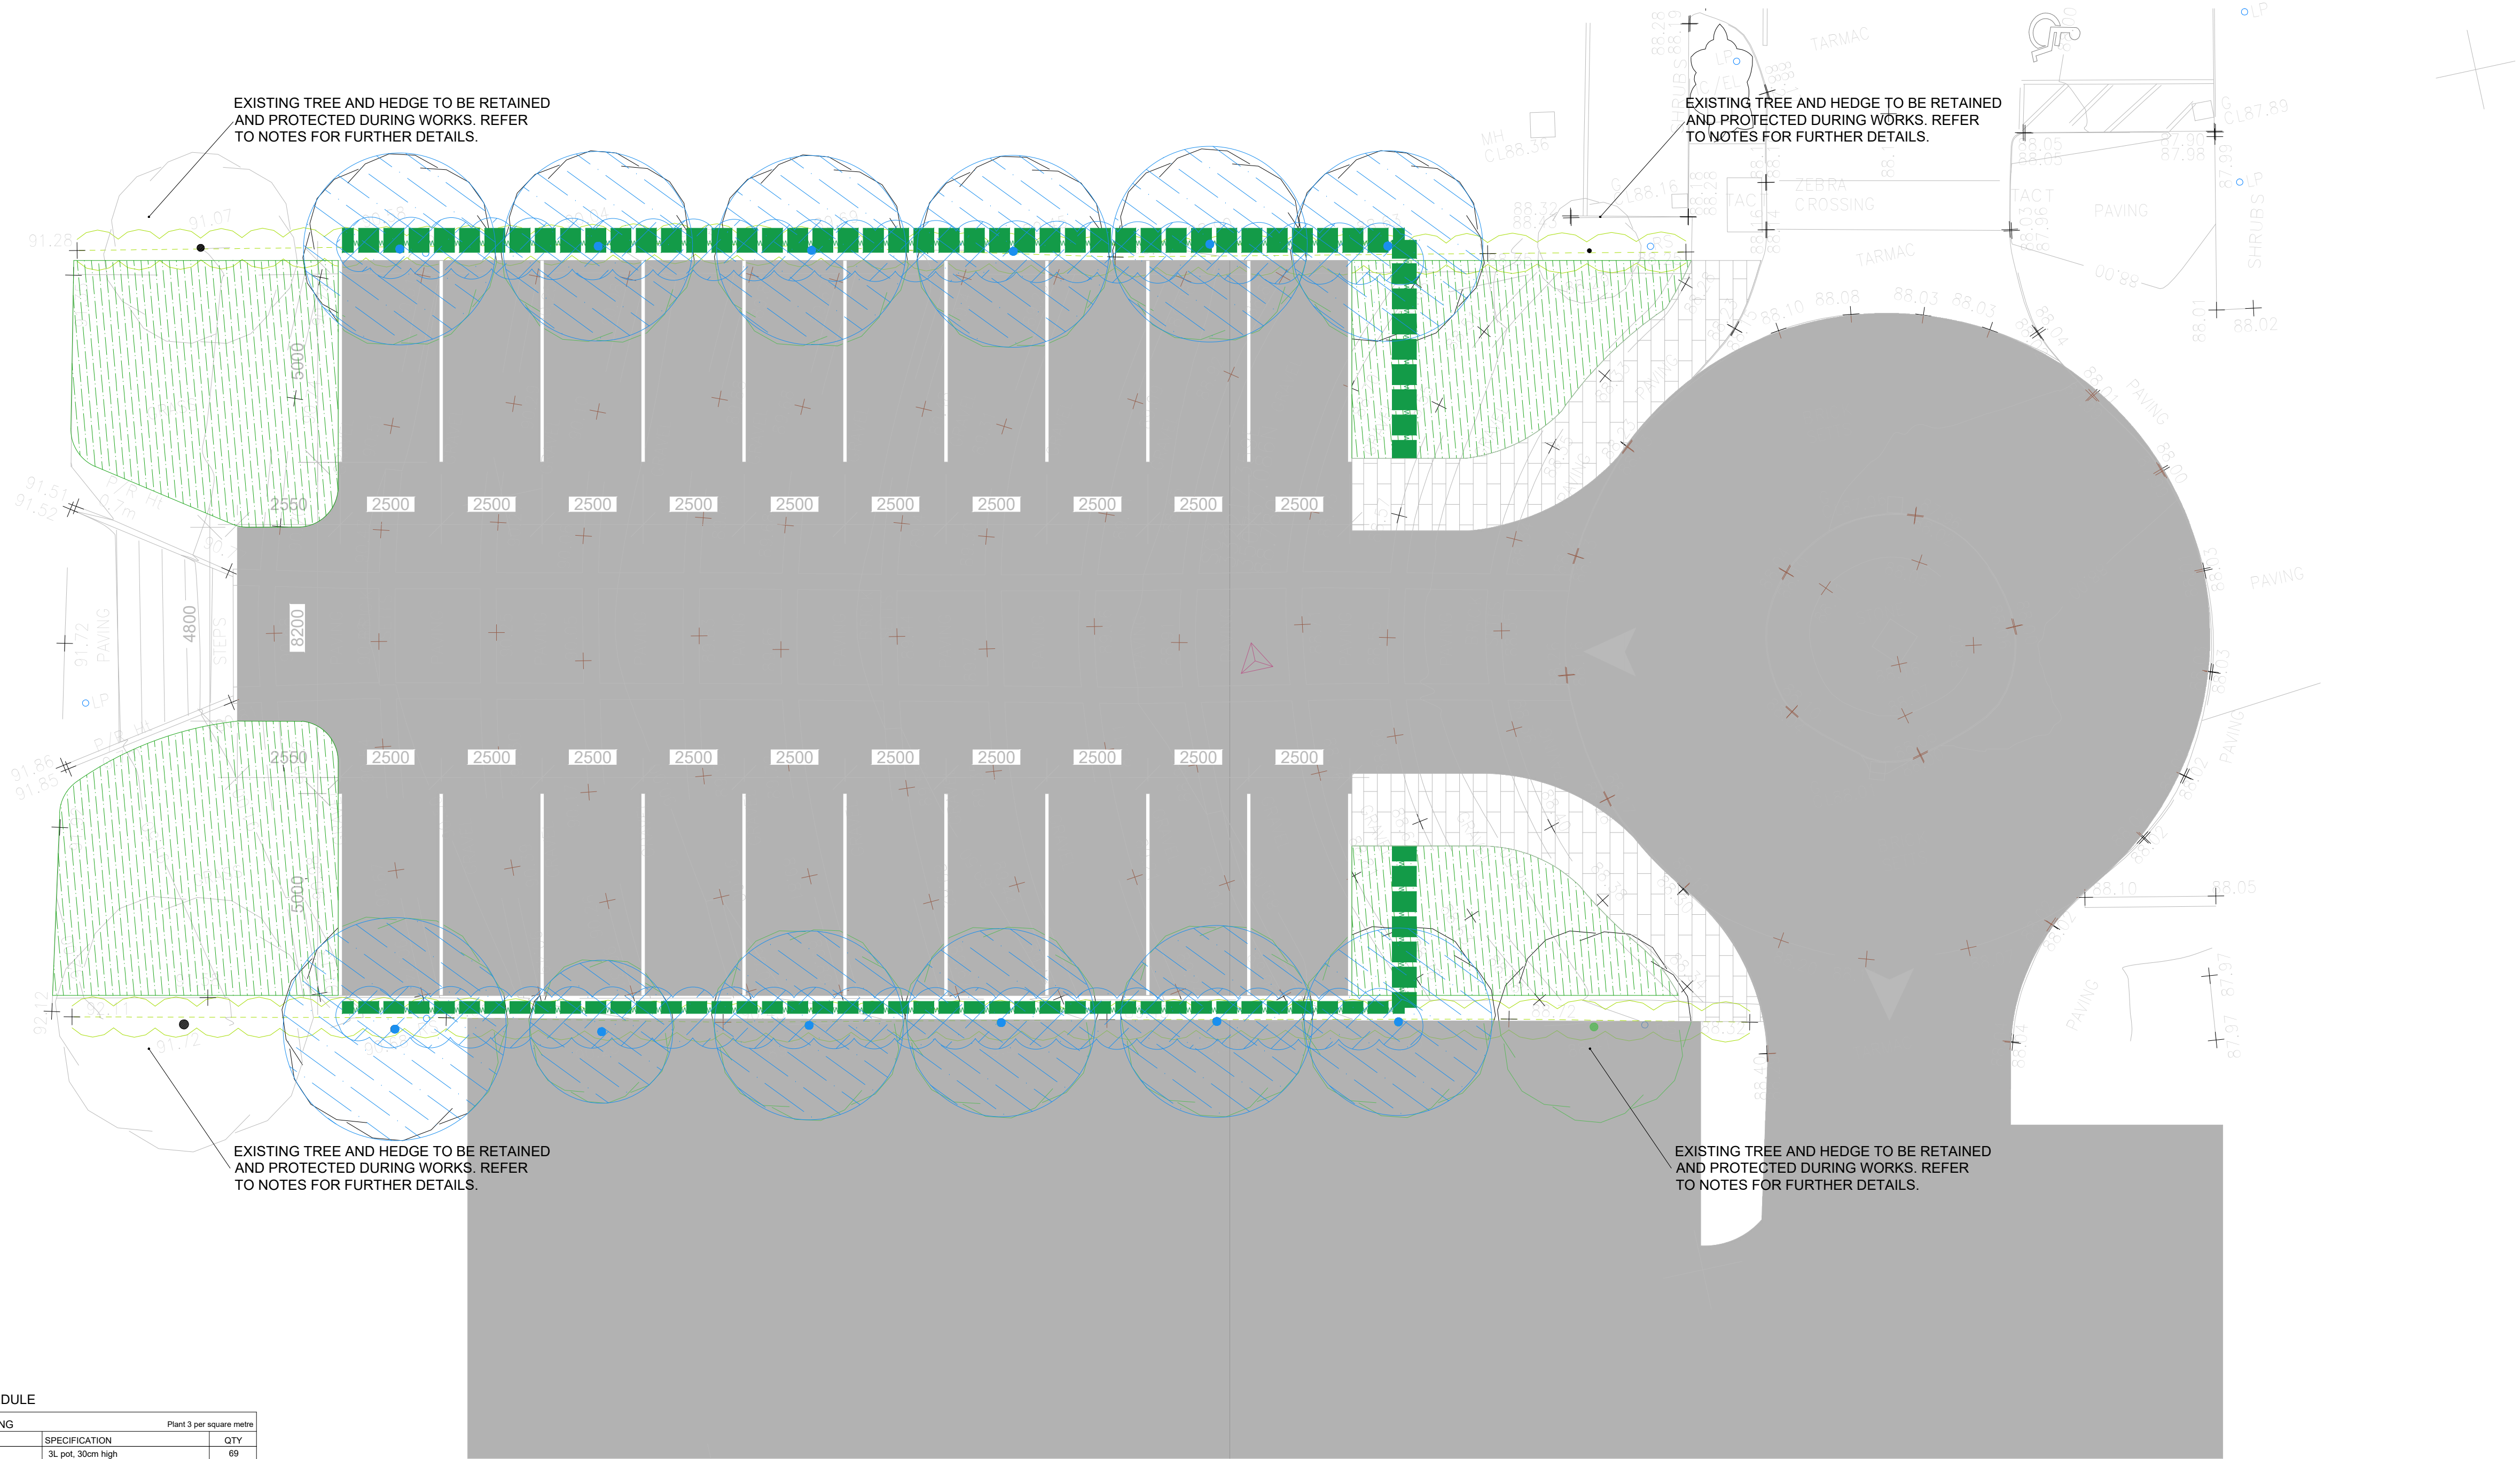


PLANTING SCHEDULE


PERENNIAL PLANTING			Plant 3 per square metre
SPECIES	SPECIFICATION	QTY	
Festuca gaucia	3L pot, 30cm high	69	
Lavandula angustifolia	3L pot, 30cm high	69	
Pachysandra terminalis	3L pot, 30cm high	69	
Perovskia Blue Spire	3L pot, 40cm high	69	
Salvia officinalis	3L pot, 40cm high	69	
Salvia tenuissima	3L pot, 40cm high	69	
PROPOSED NATIVE HEDGE PLANTING			Plant 6 per linear metre
SPECIES	SPECIFICATION	QTY	
Crataegus monogyna	60-80cm high, BR, branched, 3 breaks	93	
Prunus spinosa	60-80cm high, BR, branched, 3 breaks	93	
Acer campestre	60-80cm high, BR, branched, 3 breaks	93	
Corylus avellana	60-80cm high, BR, branched, 3 breaks	93	

KEY

- Footway - concrete paving 200 x 100 x 80mm granite aggregate paving setts
- Road - asphalt (refer to engineers drawings)
- Approximate location of existing trees to be retained
- Approximate location of existing trees/hedge to be removed
- Native hedge
- Shrub planting
- Amenity grass / turf
- Access road

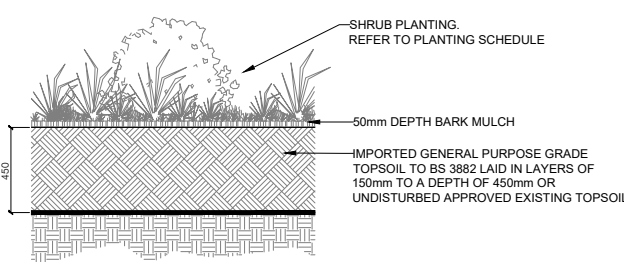

02 SHRUB PLANTING
SCALE: 1:40 @ A1

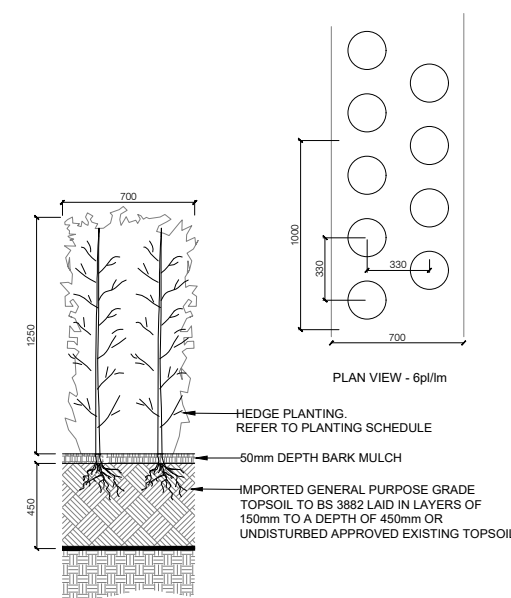

03 HEDGE PLANTING - STAGGERED DOUBLE ROW
SCALE: 1:40 @ A1