nxt-gen
next-generation

Esteem





Flush Fitted Innerframe.
Unique Integral Flush
Fitting Glazing System
With One Piece Internal
Glass Retention Bead

Pre-cut Glazing
Apertures

Glazing Apertures
Line Through
With Depression
Mouldings

PAS 24 2016
Compliant

Patent Pending


Manufactured from Thermoset GRP (Glass Reinforced Polyester), the doors are compression moulded to give a high-definition panel design with the character of timber. The stiles and rails are composed of water-resistant polymer which is bonded to the skin and filled with an insulating core of 100% CFC-free polyurethane.

Distinction doors

DISTINCTION STANDARD COLOURS:

















DISTINCTION BESPOKE COLOURS:



DOOR SPECIFICATIONS:

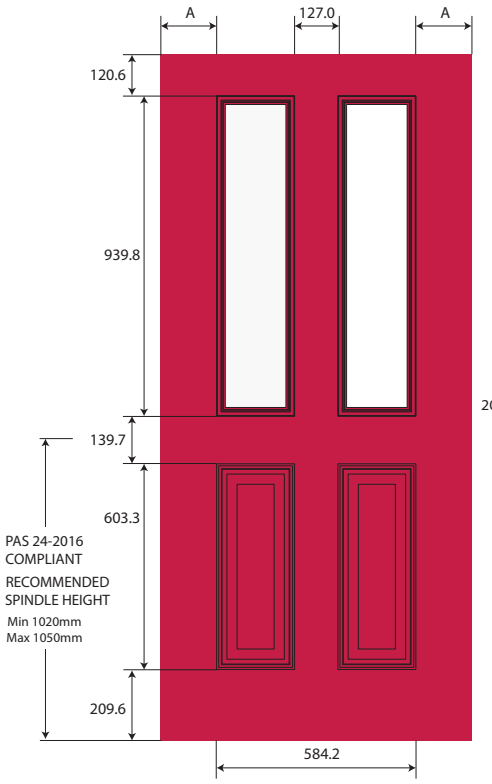

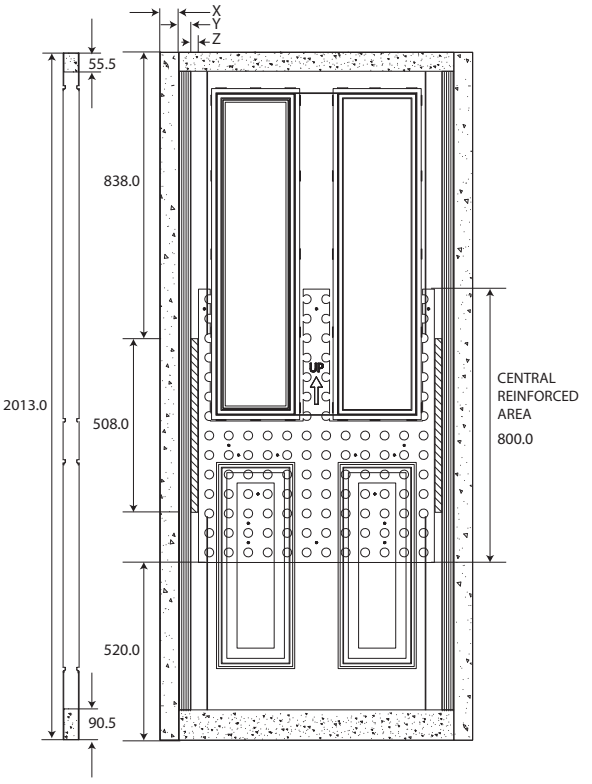

Structural Dimensions					Trimmability		
Blank Size	A	X	Y	Z	Top	Sides (each)	Bottom
762 x 2013mm	88.9mm	45mm	25mm	-	40mm	30mm	70mm
838 x 2013mm	126.9mm	55mm	35mm	20mm	40mm	40mm	70mm
914 x 2013mm	164.9mm	55mm	35mm	20mm	40mm	40mm	70mm

A = vertical stiles, X = polymer vertical rails, Y = vertical LVL timber, Z = timber lock block.

Parameters guidance

- nxt-gen NXG-ES02 Esteem door blank – maximum / minimum widths 914mm – 722mm using a 45mm B/set lock.
- It is possible to reduce the minimum width by a further 20mm to 702mm when using a 35mm b/set lock, providing your outer-frame rebate leg does not exceed 20mm and handle back plate does not exceed 30mm.

Glass size recommendation

- 203mm x 912mm x 24mm units up to 26.8mm units.
- Please refer to Distinction Doors glazing guide.

Distinction Doors Ltd,
Wentworth 36, Wentworth Industrial Estate, Wentworth Way, Tankersley, Barnsley, South Yorkshire, S75 3DH
T: 0345 2000 816 | **F**: 0345 2000 813 | **E**: sales@distinctiondoors.co.uk | **W**: www.distinctiondoors.co.uk
E & OE Distinction Doors reserves the right to change or withdraw any product(s) within this datasheet, without notice.