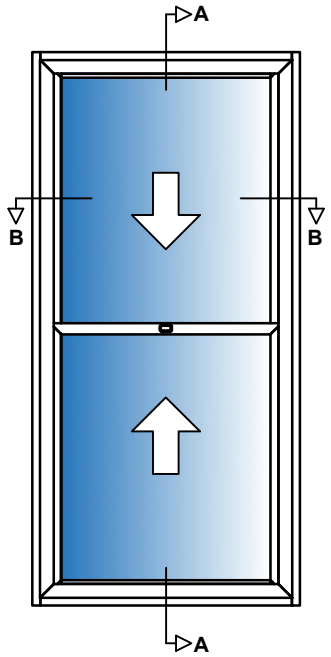


Specification

Aluminium 6063–T6 alloy to BS EN 755–9 standard, powder coated to BS 6496 to 60 – 80 micron finish.

Aluminium Finish: White – RAL 9003 Satin.

Sub–Frame: Primed high quality with 2 coats, FSC Mix credit radiata pine clear grade, FSC mix credit TT–COC–002 157.

Timber Size: 62mm x 16mm.


Glazing: All frames are factory glazed.


Gasket colour: White.

Trim: 20mm uPVC Single Bullnosed White.

Ironmongery: Non–Locking as standard or a Locking option.

In line with our company policy of continuous product development we reserve the right to make minor alterations to specification without notice.

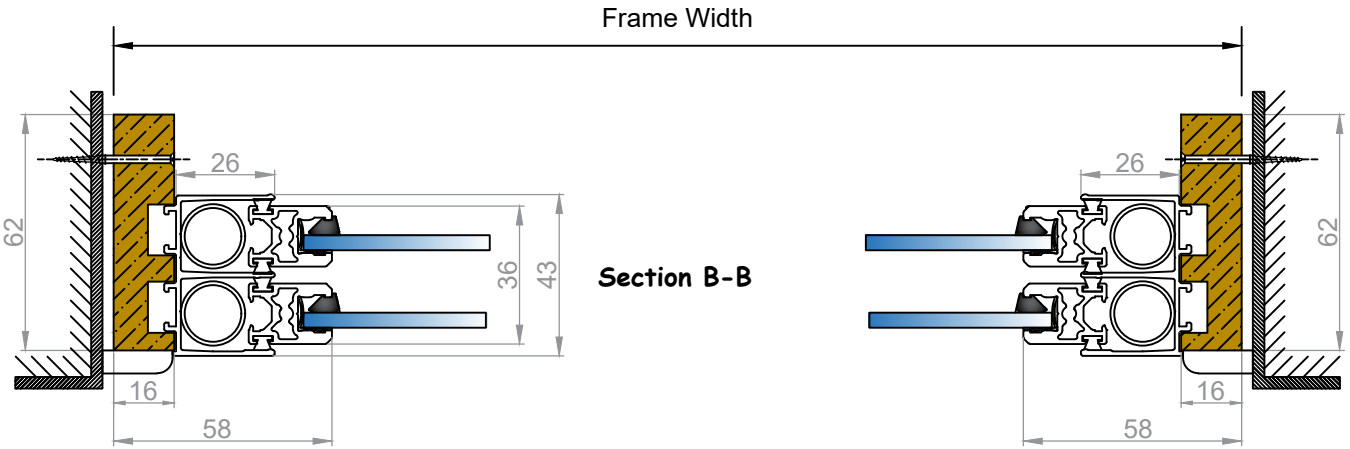

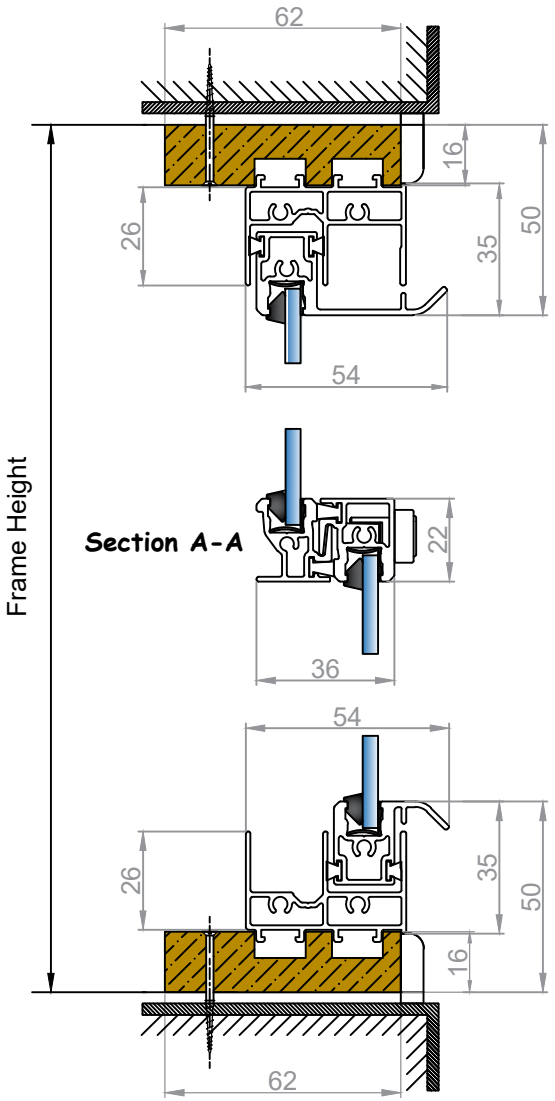

DESCRIPTION: A0-Standard Balanced Vertical Slider / Subframe	GSG 001-1010 DRAWING NO.		- PROJECT NO.	20/01/22 DATE.
GLAZING/FIXING: Up to 6.8mm glass / Reveal Fix	NTS	AB DRAWN.	- CHECKED.	SB REVISION.