


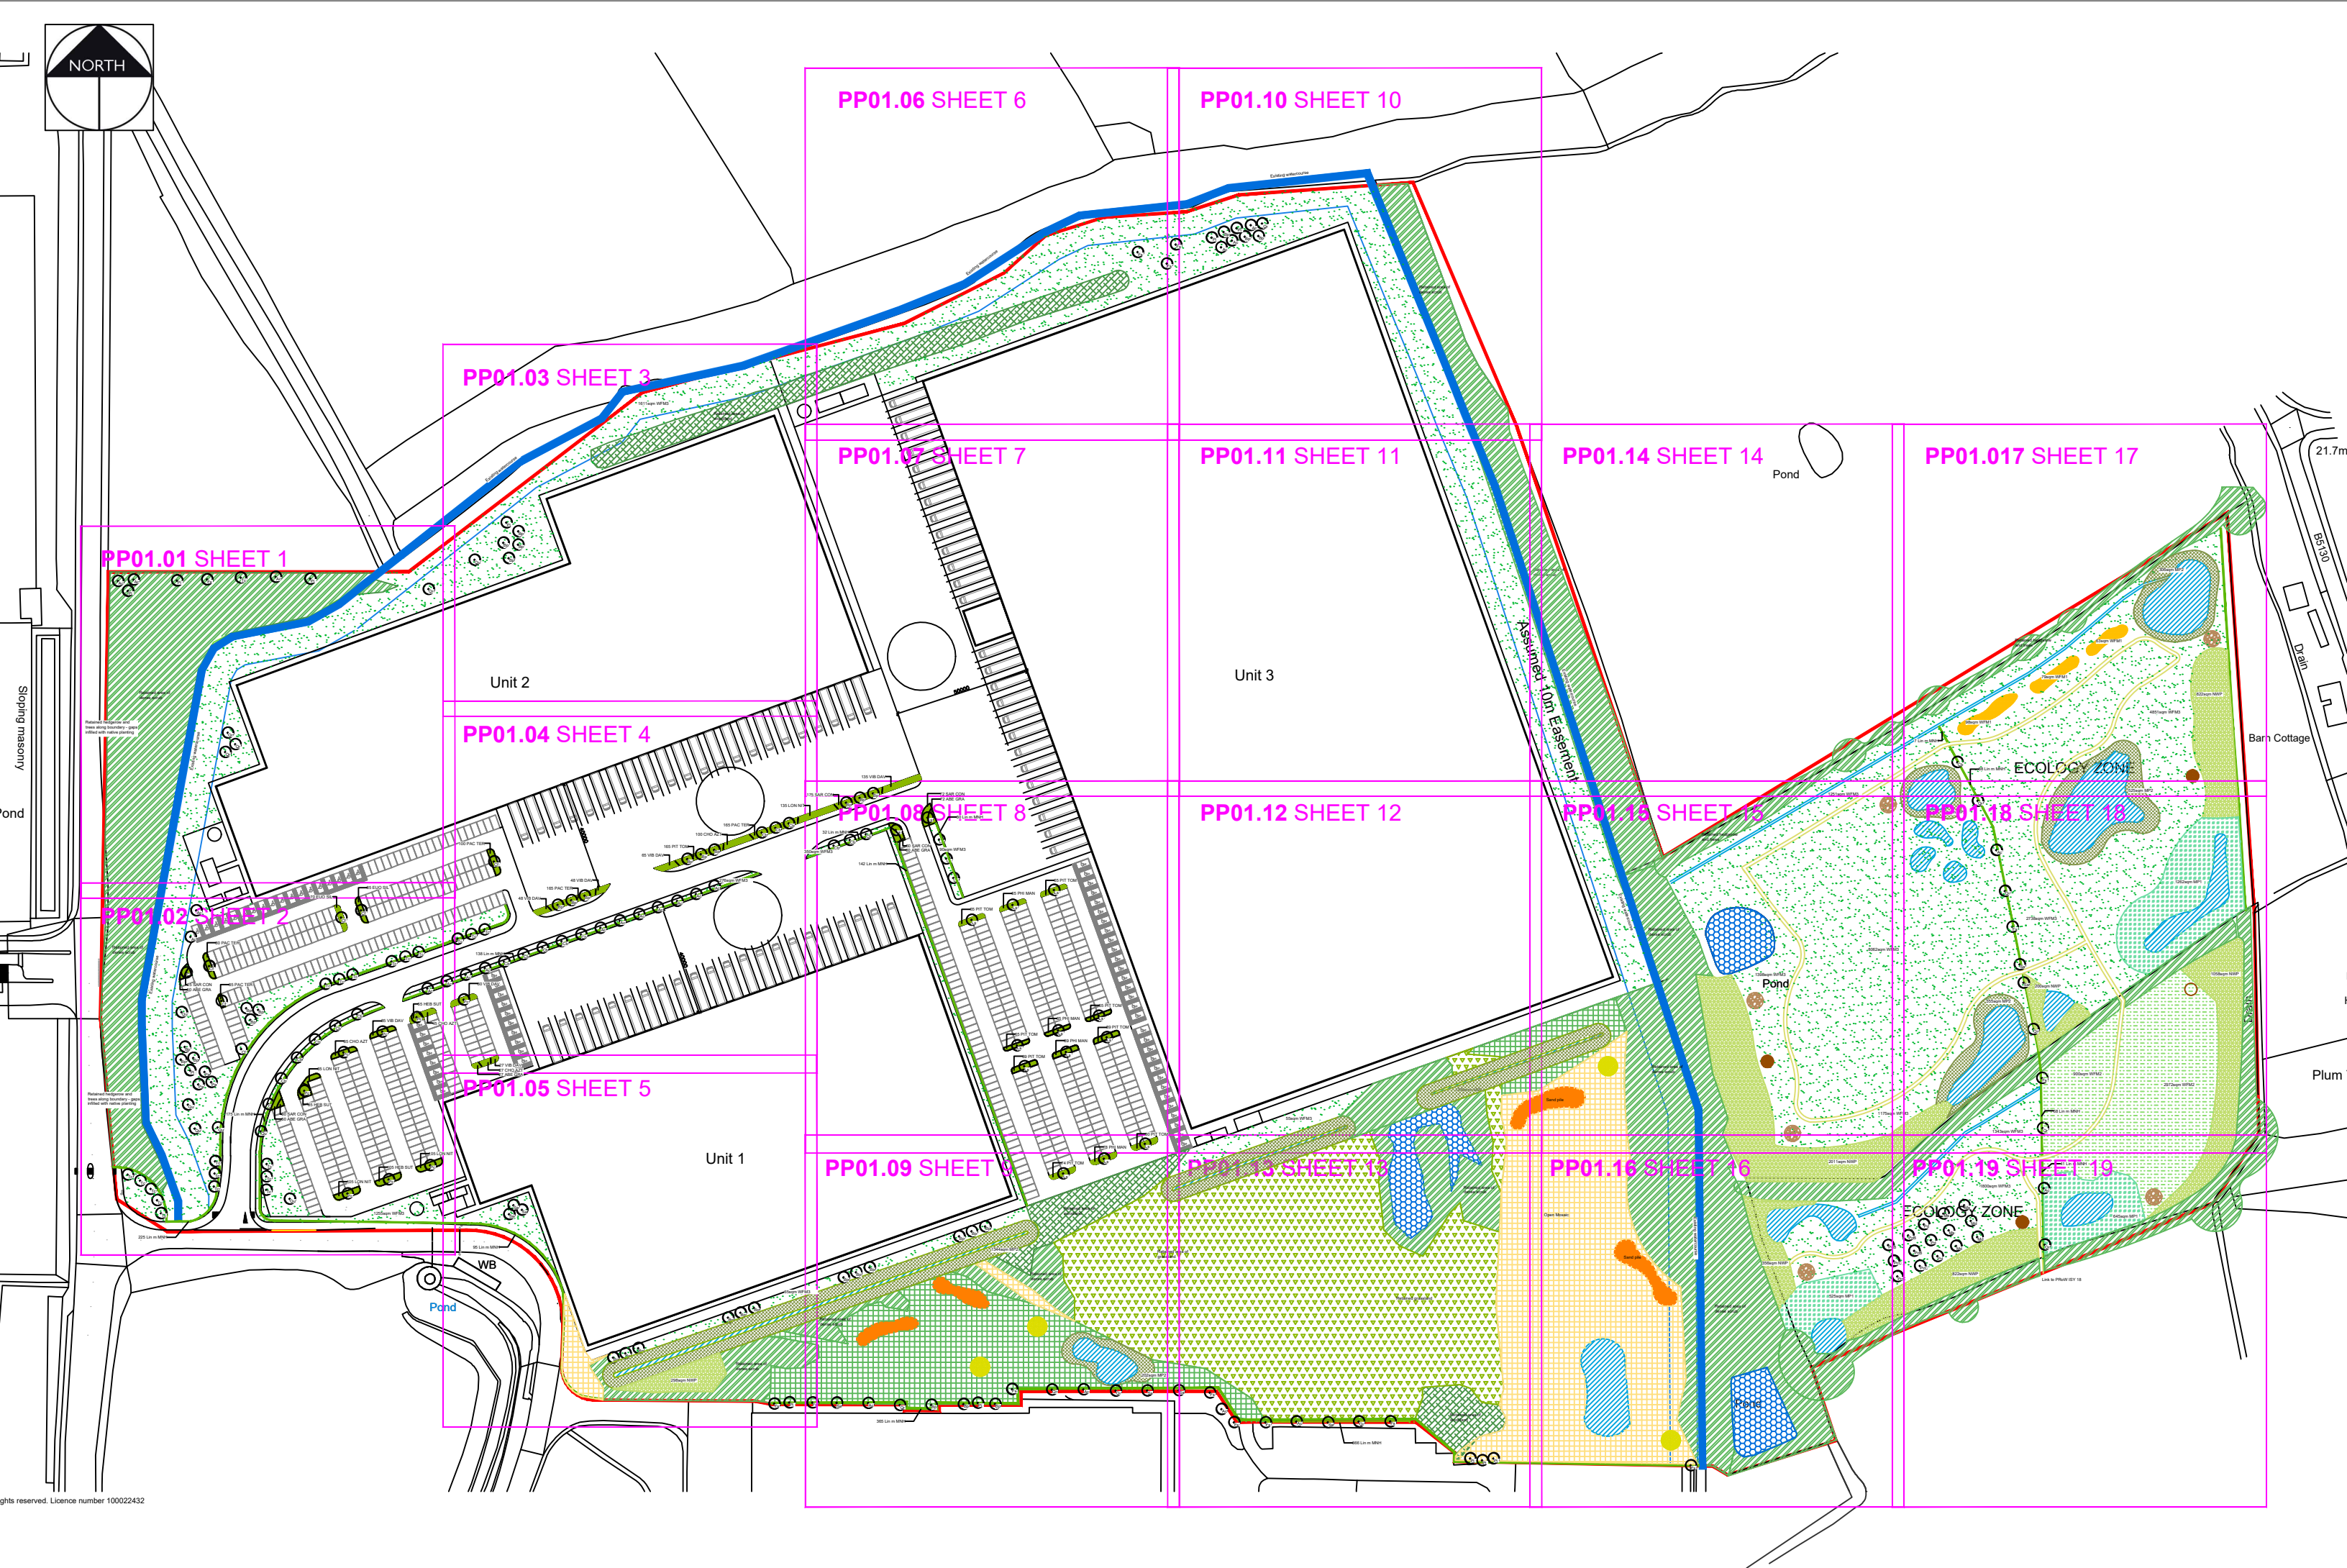

SPECIFICATION NOTES

1. General
- This plan to be read in conjunction with the following documents:
- Ecology Reports by UES
 - Drainage Strategy
 - And any other supporting information

2. General Landscaping
- Existing levels to be preserved around retained existing trees and vegetation. Existing trees and vegetation to be retained are to be protected in accordance with BS5837:2012 during construction. Proposed planting under existing trees subject to sufficient space in root areas.

3. Preparation of Planting Beds
- Rubbish, concrete, metal, glass, decayed vegetation are to be removed and disposed of off site.
 - Stones with the largest dimension exceeding 40mm are to be removed from planting beds and disposed of off site.
 - Substances injurious to plant growth including subsoil, rubble, fuel and lubricants should be removed and disposed of off site.
 - Remove any existing weed growth.
 - Areas of large root are to be grubbed up without undue disturbance of surrounding soil and adjacent areas.
 - All site preparation, planting and maintenance to comply with BS 4429

4. Soil
- Imported topsoil to be a good quality loam to BS 3882:2015. All topsoil areas shall be thoroughly cultivated by hand or suitable machinery to the full depth of the topsoil layer, incorporating ameliorant's as specified and/or as indicated by analysis and/or as directed by the Landscape Architect. Hand cultivation's shall be carried out to achieve the required finish on areas where machine cultivation is impossible i.e adjacent to kerbs, manholes and footpath junctions etc. Surplus plant matter, rubbish and surface stones having any dimension greater than 25 mm shall be collected and removed from the site. Existing topsoil to be stripped and re-used if suitable as per specification. All work to be carried out in line with BS 3882:2015 and DEFRA Construction Code of Practice for the Sustainable Use of Soils on Construction Sites (2009).

5. Plants
- General plant stock to conform to BS 3936, advanced nursery stock and planting to BS 4428. Plants shall be first class examples of their species or variety, free from all pests and diseases, with good fibrous root systems and materially undamaged (refer to relevant sections of BS3936 rts 1-4 'Specification of Nursery Stock'). All planting operations to be in general compliance with BS4428: 1989 'Code of Practice for general landscape operations (excluding hard surfaces)'.

- Carry out all planting while soil and weather conditions are suitable:
- Do not plant during periods of frost or strong winds. Plant only during the following periods:
 - Container grown and root ball plants: At any time if ground and weather conditions are favourable. Ensure that adequate watering and weed control is provided
 - Bare Root stock to be planted November to March.

All plants to be planted in cultivated planting beds at densities shown in plant schedule, in pits of min. size 0.3m x 0.3m x 0.3m deep so as to accommodate full root spread, backfilled with 80% clean topsoil and 20% compost and 20g granular fertilizer. All shrub beds to be in min. 450mm good quality, well prepared soil.

See Plant Schedule for species palette. Bed composition, arrangement and setting-out to be approved by Landscape Architect before work commences. Topsoil depth to be 450mm for shrub planting and 150mm for grass.

Native Hedgerow - Stock to be planted in double rows, 5 per linear metre. Trees to be protected with a 600mm spiral rabbit guard and staked. To be kept free of weeds during establishment using secured mulch matting. Bare root plants to be notch planted to depth of root collar in accordance with BS4428.

6. Trees
- Trees shown on plan to be planted with species as labelled or similar approved. Do not substitute species, variety and form or reduce the specified number/density of plants without prior agreement. Note sizes shown are minimum. All trees to be planted in pits 2m x 2m x 1m deep, backfilled with 80% clean topsoil with 15% peat free tree and shrub planting compost and 5% Tree Growth Enhancer 'GroChar', including 100g granular fertilizer. Base of pit to be filled with a Terram Geotextile layer on 150mm drainage layer consisting of 20mm nominal size free draining pea gravel. Water-in heavily after planting and surface bark chippings 75mm depth. All trees to be triple staked with timber cross bar and soft ties. Any necessary tree works are to be carried out by an approved tree surgeon to BS 3998. All trees to be protected with 600mm spiral rabbit guard.

All work to be carried out in line with BS 3882:2015 and DEFRA Construction Code of Practice for the Sustainable Use of Soils on Construction Sites (2009).

7. Mulch
- General purpose mulch prepared in accordance with PAS 100. All planting areas and tree pits to be mulched with 75mm (settled depth) bark mulch. Sample of mulch to be approved by Landscape Architect.

8. Wildflower Meadow Grass
- Seeding shall be carried out during appropriate seasons and while soil and weather conditions are suitable for the relevant operations. Hand tools shall be used around trees, plants and in confined spaces where it is impractical to use machinery. The soil shall be weed free prior to seeding on prepared, levelled soil (minimum 150mm depth) in the areas indicated on the drawings. Sown to manufactures guidance and in accordance with Ecology recommendations.

9. Replacement of trees and vegetation
- The contractor shall replace all plants/trees that have failed to thrive (show growth or display foliage) during the growing season after planting (including plants damaged during maintenance operations). Replacements to match original specification or similar size/species approved by the Landscape Architect. In particular, if any of the boundary vegetation, including those marked for retention, are to be replaced with similar size and species if they die within 5 years.

PLANTING SCHEDULE						
Trees						
Qty	Code	Name	Girth	Height cm	Specification	
25	Ac	Acer campestre	14-16	400-450	RB 3x; Extra heavy standard; clear stem minimum 200cm; 5 breaks	
37	Bp	Betula pendula	14-16	400-450	RB 3x; Extra heavy standard; clear stem minimum 200cm; 5 breaks	
18	Cb	Carpinus betulus	14-16	400-450	RB 3x; Extra heavy standard; clear stem minimum 200cm; 5 breaks	
7	Cf	Carpinus betulus 'Frans fontaine'	14-16	400-600	RB 3x; Extra heavy standard; clear stem minimum 200cm; 5 breaks	
14	Fs	Fagus sylvestris	14-16	400-450	RB 3x; Extra heavy standard; clear stem minimum 200cm; 5 breaks	
17	Ls	Liquidambar styraciflua 'Lane Roberts'	14-16	400-450	RB 3x; Semi-mature; clear stem minimum 200cm	
3	Md	Malus domestica 'Discovery'	14-16	400-450	RB 3x; Extra heavy standard; clear stem minimum 175-200cm; 5 breaks	
3	Ms	Malus domestica 'Sunset'	14-16	400-450	RB 3x; Extra heavy standard; clear stem minimum 175-200cm; 5 breaks	
12	Pi	Pinus sylvestris		300-350	Leader with laterals; feathered to the base	
3	Pd	Prunus domestica 'Victoria Plum'	14-16	400-450	RB 3x; Extra heavy standard; clear stem minimum 175-200cm; 5 breaks	
3	Pa	Prunus avium 'Plena'	10-12	300-350	RB 2x; Heavy Standard; clear stem minimum 175-200cm; 4 breaks	
8	Pc	Pyrus calleryana 'Chanticleer'	14-16	400-450	RB 3x; Extra heavy standard; clear stem minimum 175-200cm; 5 breaks	
3	PcC	Pyrus communis 'Conference'	14-16	400-450	RB 3x; Extra heavy standard; clear stem minimum 175-200cm; 5 breaks	
3	PcB	Pyrus communis 'Beth'	14-16	400-450	RB 3x; Extra heavy standard; clear stem minimum 175-200cm; 5 breaks	
14	Qr	Quercus robur	14-16	400-450	RB 3x; Extra heavy standard; clear stem minimum 200cm; 5 breaks	
7	Qu	Quercus rubra	14-16	400-450	RB 3x; Extra heavy standard; clear stem minimum 200cm; 5 breaks	
9	Sa	Sorbus aucuparia	14-16	400-450	RB 3x; Extra heavy standard; clear stem minimum 200cm; 5 breaks	
21		Tilia cordata 'Greenspire'				

NWP - Native Woodland Planting (random mix 1 per m ²)						
Total Area On Site (m ²)						
5567						
Qty	% Mix	Name	Size cm	Root Cond.	Density / Spacing	Specification
557	10	Betula pendula	60-90	B	1/m ²	Transplant (seed-raised), 1+1
557	10	Corylus avellana	60-90	B	1/m ²	Transplant (seed-raised), 1+1
835	15	Crataegus monogyna	60-90	B	1/m ²	Transplant (seed-raised), 1+1
278	5	Ilex aquifolium	40-60	2L pot	1/m ²	Leader with laterals
557	10	Sorbus aucuparia	60-90	B	1/m ²	Transplant (seed-raised), 1+1
557	10	Prunus avium	60-90	B	1/m ²	Transplant (seed-raised), 1+1
278	5	Prunus spinosa	60-90	B	1/m ²	Transplant (seed-raised), 1+1
835	15	Quercus robur	60-90	B	1/m ²	Transplant (seed-raised), 1+1
278	5	Rosa canina	60-90	B	1/m ²	Transplant (seed-raised), 1+1
835	15	Viburnum opulus	60-90	B	1/m ²	Transplant (seed-raised), 1+1

MNH - Mixed Native Hedge						
Total Length On Site 1772 Lin m						
No. of Plants	% Mix	Species	Size in cm	Root Cond.	Density / Spacing	Specification
8860	MNH	Mixed Native Hedge				
1329	15	Crataegus monogyna	60-90	B	5/m ²	Transplant (seed-raised), 1+1
1329	15	Corylus avellana	60-90	B	5/m ²	Transplant (seed-raised), 1+1
1329	15	Ilex aquifolium	40-60	2L	5/m ²	Leader with laterals
443	5	Lonicera periclymenum	60-80	2L	5/m ²	Caned: several breaks
886	10	Malus sylvestris	60-90	B	5/m ²	Transplant (seed-raised), 1+1
886	10	Prunus spinosa	60-90	B	5/m ²	Transplant (seed-raised), 1+1
443	5	Rosa arvensis	60-90	B	5/m ²	Transplant (seed-raised), 1+1
443	5	Rosa canina	60-90	B	5/m ²	Transplant (seed-raised), 1+1
886	10	Sambucus nigra	60-90	B	5/m ²	Transplant (seed-raised), 1+1
886	10	Viburnum opulus	60-90	B	5/m ²	Transplant (seed-raised), 1+1

Wildflower Meadow Planting			
Code	Area (m2)	Seed Mix Specification	Sowing Rate (g/m ²)
WFM1	240	N4F Summer flowering Butterfly and Bee Mix	1.5g/m2 sow to suppliers recommendations
WFM2	3872	Emorsgate EM10 Tussock Mixture	4g/m2 sow to suppliers recommendations

Grassland Meadow Planting			
Code	Area (m2)	Seed Mix Specification	Sowing Rate (g/m ²)
WFM3	26,320	Emorsgate EM3 Special General Purpose Meadow Mixture	Suppliers recommendations.

MP - Marginal Planting			
Code	Area (m2)	Seed Mix Specification	Sowing Rate (g/m ²)
MP1	2432	Naturescape N7F Wetland Mix	1.5g/m2. sow to suppliers recommendations
MP2	4235	Species mix to include Mentha aquatica, Myosotis scorpioides, Veronica beccabunga, Nasturtium officinale, Iris pseudacorus, Glyceria maxima, Carex riparia, Carex pseudocyperus	To Ecologists recommendations

SHRUBS						
Shrub bed composition to be laid out and agreed with Landscape Architect prior to planting						
Qty	Abbrev.	Name	Rate / m2	Height	Container Size	Specification
259	ABE GRA	Abelia grandiflora	5	30-40	3L	Bushy; 3 breaks
257	CHO AZT	Choisya Aztec Pearl	5	30-40	3L	Bushy; 5 breaks
155	EUO SIL	Euonymus 'Silver Queen'	5	30-40	3L	Bushy; 5 breaks
245	HEB SUT	Hebe pinguifolia 'sutherlandii'	5	20-30D	3L	Bushy; 5 breaks
410	LON NIT	Lonicera nitida	5	30-40	3L	Bushy; 5 breaks
297	PHI MAN	Philadelphus 'Manteau d'hermine'	5	30-40	3L	Branched; 4 breaks
757	PIT TOM	Pittosporum tenuifolium 'Tom thumb'	5	20-30	5L	Bushy; 5 breaks
545	PAC TER	Pachysandra terminalis	7	20-30	3L	Bushy; 4 breaks
362	SAR CON	Sarcococca confusa	5	20-30	3L	Bushy; 6 breaks
488	VIB DAV	Viburnum davidii	5	20-30	3L	Bushy; 3 brks

P4	27.03.23	Updated SuDS ponds	KLJ
P3	25.10.22	Revised to Architects layout	KLJ
P2	14.09.22	Marginal planting to ponds	KLJ
P1	26.08.22	Initial Issue	KLJ
Rev	Date	Description	Initials

pgla | landscape architects

PGLA Ltd
Landscape Architects
Station Hop Offices
815 Stockport Road
Manchester
M19 3BS

t: 0161 238 9138
e: info@pgla.co.uk
w: www.pgla.co.uk

Client

FIREM

Project

3A, KINGMOOR, WREXHAM


Description

PLANTING PLAN AND SCHEDULE

Status

FOR PLANNING

Scale	Drawn	Checked	Date
1:1500@A1	KLJ	PGG	OCT 2022
Job number	Drawing number	Revision	
WRE2206	PP01.00	P4	



Retained hedgerow and trees along boundary - gaps infilled with native planting

Retained area of dense scrub

Existing watercourse


Qr
Qr
Qr

70 EUO SIL


85 EUO SIL

100 P


KEY




EXISTING VEGETATION - DENSE SCRUB
Please refer to the ecology report for details on species




EXISTING VEGETATION - WOODLAND
Please refer to the ecology report for details on species




EXISTING GRASSLAND
Areas of grassland to be retained. Please refer to the ecology report for details




EXISTING PONDS
Ponds to be retained




PROPOSED PONDS
Refer to Ecology Report for further details




MARSHY WET GRASSLAND
Refer to planting schedule for species and quantities and Ecology Report




WILDFLOWER GRASSLAND
Refer to planting schedule for details on species and quantities




TALL TUSSOCKY GRASSLAND
Refer to planting schedule for details on species and quantities




MIXED NATIVE HEDGEROW
Refer to planting schedule for details on species and quantities




BUTTERFLY / BEETLE WILDFLOWER MOUND
South facing mound planted in a wildflower mix. Refer to planting schedule for details on species and quantities




TREES
Refer to planting schedule for details on species and quantities




WET DITCH




PATH
Maintained short grassland path




AMPHIBIAN AND REPTILE HIBERNACULA
Refer to Ecology Report for further information



LOG PILE



MARGINAL PLANTING
Refer to planting schedule for details and quantities



DENSE SCRUB
Native whip planting. Refer to planting schedule for details and quantities




RETAINED DISTURBED AREAS
Areas of open mosaic disturbed ground with scattered scrub to remain as existing. Refer to UES Ecology Report for further details




OPEN MOSAIC GROUND
Areas of existing hardstanding / gravel to be broken up & allowed to naturally colonise with wildflower and scrub. Refer to UES Ecology Report for further details



SANDBANKS
Unvegetated sandbanks



AMPHIBIAN HIBERNACULA



PROPOSED SHRUB BED
Please refer to the planting schedule for further details on species, quantities and nursery grades

P4	27.03.23	Updated SuDS ponds	KLJ
P3	01.11.22	Revised to Architects layout + Drainage Strategy	KLJ
P2	14.09.22	Marginal planting to ponds	KLJ
P1	26.08.22	Initial Issue	KLJ
Rev	Date	Description	Initials

pgla | landscape architects

PGLA Ltd
Landscape Architects
Station Hop Offices
815 Stockport Road
Manchester
M19 3BS

t: 0161 238 9138
e: info@pgla.co.uk
w: www.pgla.co.uk

Client

FI REM

Project

KINGMOOR, WREXHAM

Description

PLANTING PLAN


SHEET 1

Status

FOR PLANNING

Scale	Drawn	Checked	Date
1:250@A1	KLJ	PGG	AUG 2022
Job number	Drawing number	Revision	
WRE2206	PP01.01	P4	

Original size 100mm @ A1

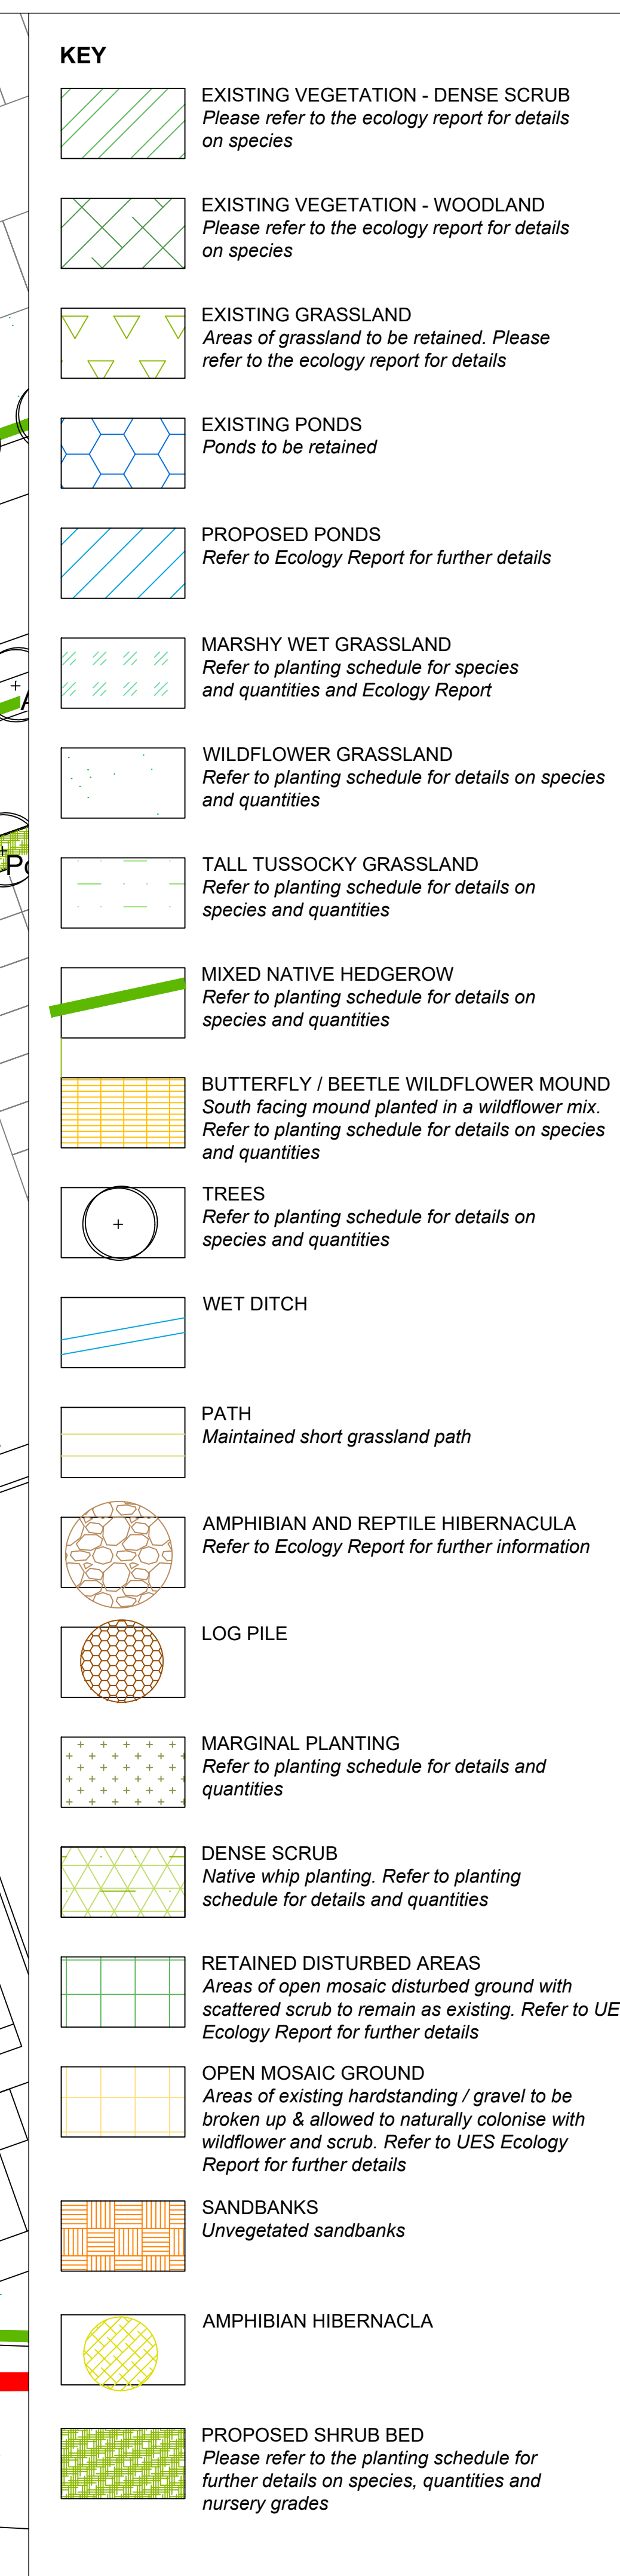

P4	27.03.23	Updated SuDS ponds	KLJ
P3	01.11.22	Revised to Architects layout + Drainage Strategy	KLJ
P2	14.09.22	Marginal planting to ponds	KLJ
P1	26.08.22	Initial Issue	KLJ
Rev	Date	Description	Initials



PGLA Ltd
 Landscape Architects
 Station Hop Offices
 815 Stockport Road
 Manchester
 M19 3BS
 t: 0161 238 9138
 e: info@pgla.co.uk
 w: www.pgla.co.uk

Client	FIREM		
Project	KINGMOOR, WREXHAM		
Description	PLANTING PLAN		
	SHEET 2		
Status	FOR PLANNING		
Scale	Drawn	Checked	Date
1:250@A1	KLJ	PGG	AUG 2022
Job number	Drawing number		Revision
WRE2206	PP01.02		P4



Existing watercourse

1611sqm WFM3

Retained area of woodland

Pi
Bp
Bp
Bp
Qu
Bp

Unit 2

- KEY
- EXISTING VEGETATION - DENSE SCRUB
Please refer to the ecology report for details on species
- EXISTING VEGETATION - WOODLAND
Please refer to the ecology report for details on species
- EXISTING GRASSLAND
Areas of grassland to be retained. Please refer to the ecology report for details
- EXISTING PONDS
Ponds to be retained
- PROPOSED PONDS
Refer to Ecology Report for further details
- MARSHY WET GRASSLAND
Refer to planting schedule for species and quantities and Ecology Report
- WILDFLOWER GRASSLAND
Refer to planting schedule for details on species and quantities
- TALL TUSSOCKY GRASSLAND
Refer to planting schedule for details on species and quantities
- MIXED NATIVE HEDGEROW
Refer to planting schedule for details on species and quantities
- BUTTERFLY / BEETLE WILDFLOWER MOUND
South facing mound planted in a wildflower mix. Refer to planting schedule for details on species and quantities
- TREES
Refer to planting schedule for details on species and quantities
- WET DITCH
- PATH
Maintained short grassland path
- AMPHIBIAN AND REPTILE HIBERNACULA
Refer to Ecology Report for further information
- LOG PILE
- MARGINAL PLANTING
Refer to planting schedule for details and quantities
- DENSE SCRUB
Native whip planting. Refer to planting schedule for details and quantities
- RETAINED DISTURBED AREAS
Areas of open mosaic disturbed ground with scattered scrub to remain as existing. Refer to UES Ecology Report for further details
- OPEN MOSAIC GROUND
Areas of existing hardstanding / gravel to be broken up & allowed to naturally colonise with wildflower and scrub. Refer to UES Ecology Report for further details
- SANDBANKS
Unvegetated sandbanks
- AMPHIBIAN HIBERNACLA
- PROPOSED SHRUB BED
Please refer to the planting schedule for further details on species, quantities and nursery grades

P4	27.03.23	Updated SuDS ponds	KLJ
P3	01.11.22	Revised to Architects layout + Drainage Strategy	KLJ
P2	14.09.22	Marginal planting to ponds	KLJ
P1	26.08.22	Initial Issue	KLJ
Rev	Date	Description	Initials

pgla

landscape architects

PGLA Ltd

Landscape Architects

Station Hop Offices

815 Stockport Road

Manchester

M19 3BS

t: 0161 238 9138

e: info@pgla.co.uk

w: www.pgla.co.uk

Client

FIREM

Project

3A, KINGMOOR, WREXHAM

Description

PLANTING PLAN

SHEET 3

Status

FOR PLANNING

Scale

1:250@A1

Drawn

KLJ

Checked

PGG

Date

AUG 2022

Job number

WRE2206


Drawing number

PP01.03

Revision

P4

Original size 100mm @ A1



KEY	
	EXISTING VEGETATION - DENSE SCRUB <i>Please refer to the ecology report for details on species</i>
	EXISTING VEGETATION - WOODLAND <i>Please refer to the ecology report for details on species</i>
	EXISTING GRASSLAND <i>Areas of grassland to be retained. Please refer to the ecology report for details</i>
	EXISTING PONDS <i>Ponds to be retained</i>
	PROPOSED PONDS <i>Refer to Ecology Report for further details</i>
	MARSHY WET GRASSLAND <i>Refer to planting schedule for species and quantities and Ecology Report</i>
	WILDFLOWER GRASSLAND <i>Refer to planting schedule for details on species and quantities</i>
	TALL TUSSOCKY GRASSLAND <i>Refer to planting schedule for details on species and quantities</i>
	MIXED NATIVE HEDGEROW <i>Refer to planting schedule for details on species and quantities</i>
	BUTTERFLY / BEETLE WILDFLOWER MOUND <i>South facing mound planted in a wildflower mix. Refer to planting schedule for details on species and quantities</i>
	TREES <i>Refer to planting schedule for details on species and quantities</i>
	WET DITCH
	PATH <i>Maintained short grassland path</i>
	AMPHIBIAN AND REPTILE HIBERNACULA <i>Refer to Ecology Report for further information</i>
	LOG PILE
	MARGINAL PLANTING <i>Refer to planting schedule for details and quantities</i>
	DENSE SCRUB <i>Native whip planting. Refer to planting schedule for details and quantities</i>
	RETAINED DISTURBED AREAS <i>Areas of open mosaic disturbed ground with scattered scrub to remain as existing. Refer to UES Ecology Report for further details</i>
	OPEN MOSAIC GROUND <i>Areas of existing hardstanding / gravel to be broken up & allowed to naturally colonise with wildflower and scrub. Refer to UES Ecology Report for further details</i>
	SANDBANKS <i>Unvegetated sandbanks</i>
	AMPHIBIAN HIBERNACLA
	PROPOSED SHRUB BED <i>Please refer to the planting schedule for further details on species, quantities and nursery grades</i>

Rev	Date	Description	Initials
P4	27.03.23	Updated SuDS ponds	KLJ
P3	01.11.22	Revised to Architects layout + Drainage Strategy	KLJ
P2	14.09.22	Marginal planting to ponds	KLJ
P1	26.08.22	Initial Issue	KLJ

PGLA Ltd
Landscape Architects
Station Hop Offices
815 Stockport Road
Manchester
M19 3BS

t: 0161 238 9138
e: info@pgla.co.uk
w: www.pgla.co.uk

Client

FIREM

Project

3A, KINGMOOR, WREXHAM

Description

PLANTING PLAN


SHEET 4

Status

FOR PLANNING

Scale	Drawn	Checked	Date
1:250@A1	KLJ	PGG	AUG 2022
Job number	Drawing number	Revision	
WRE2206	PP01.04	P4	

Original size 100mm @ A1

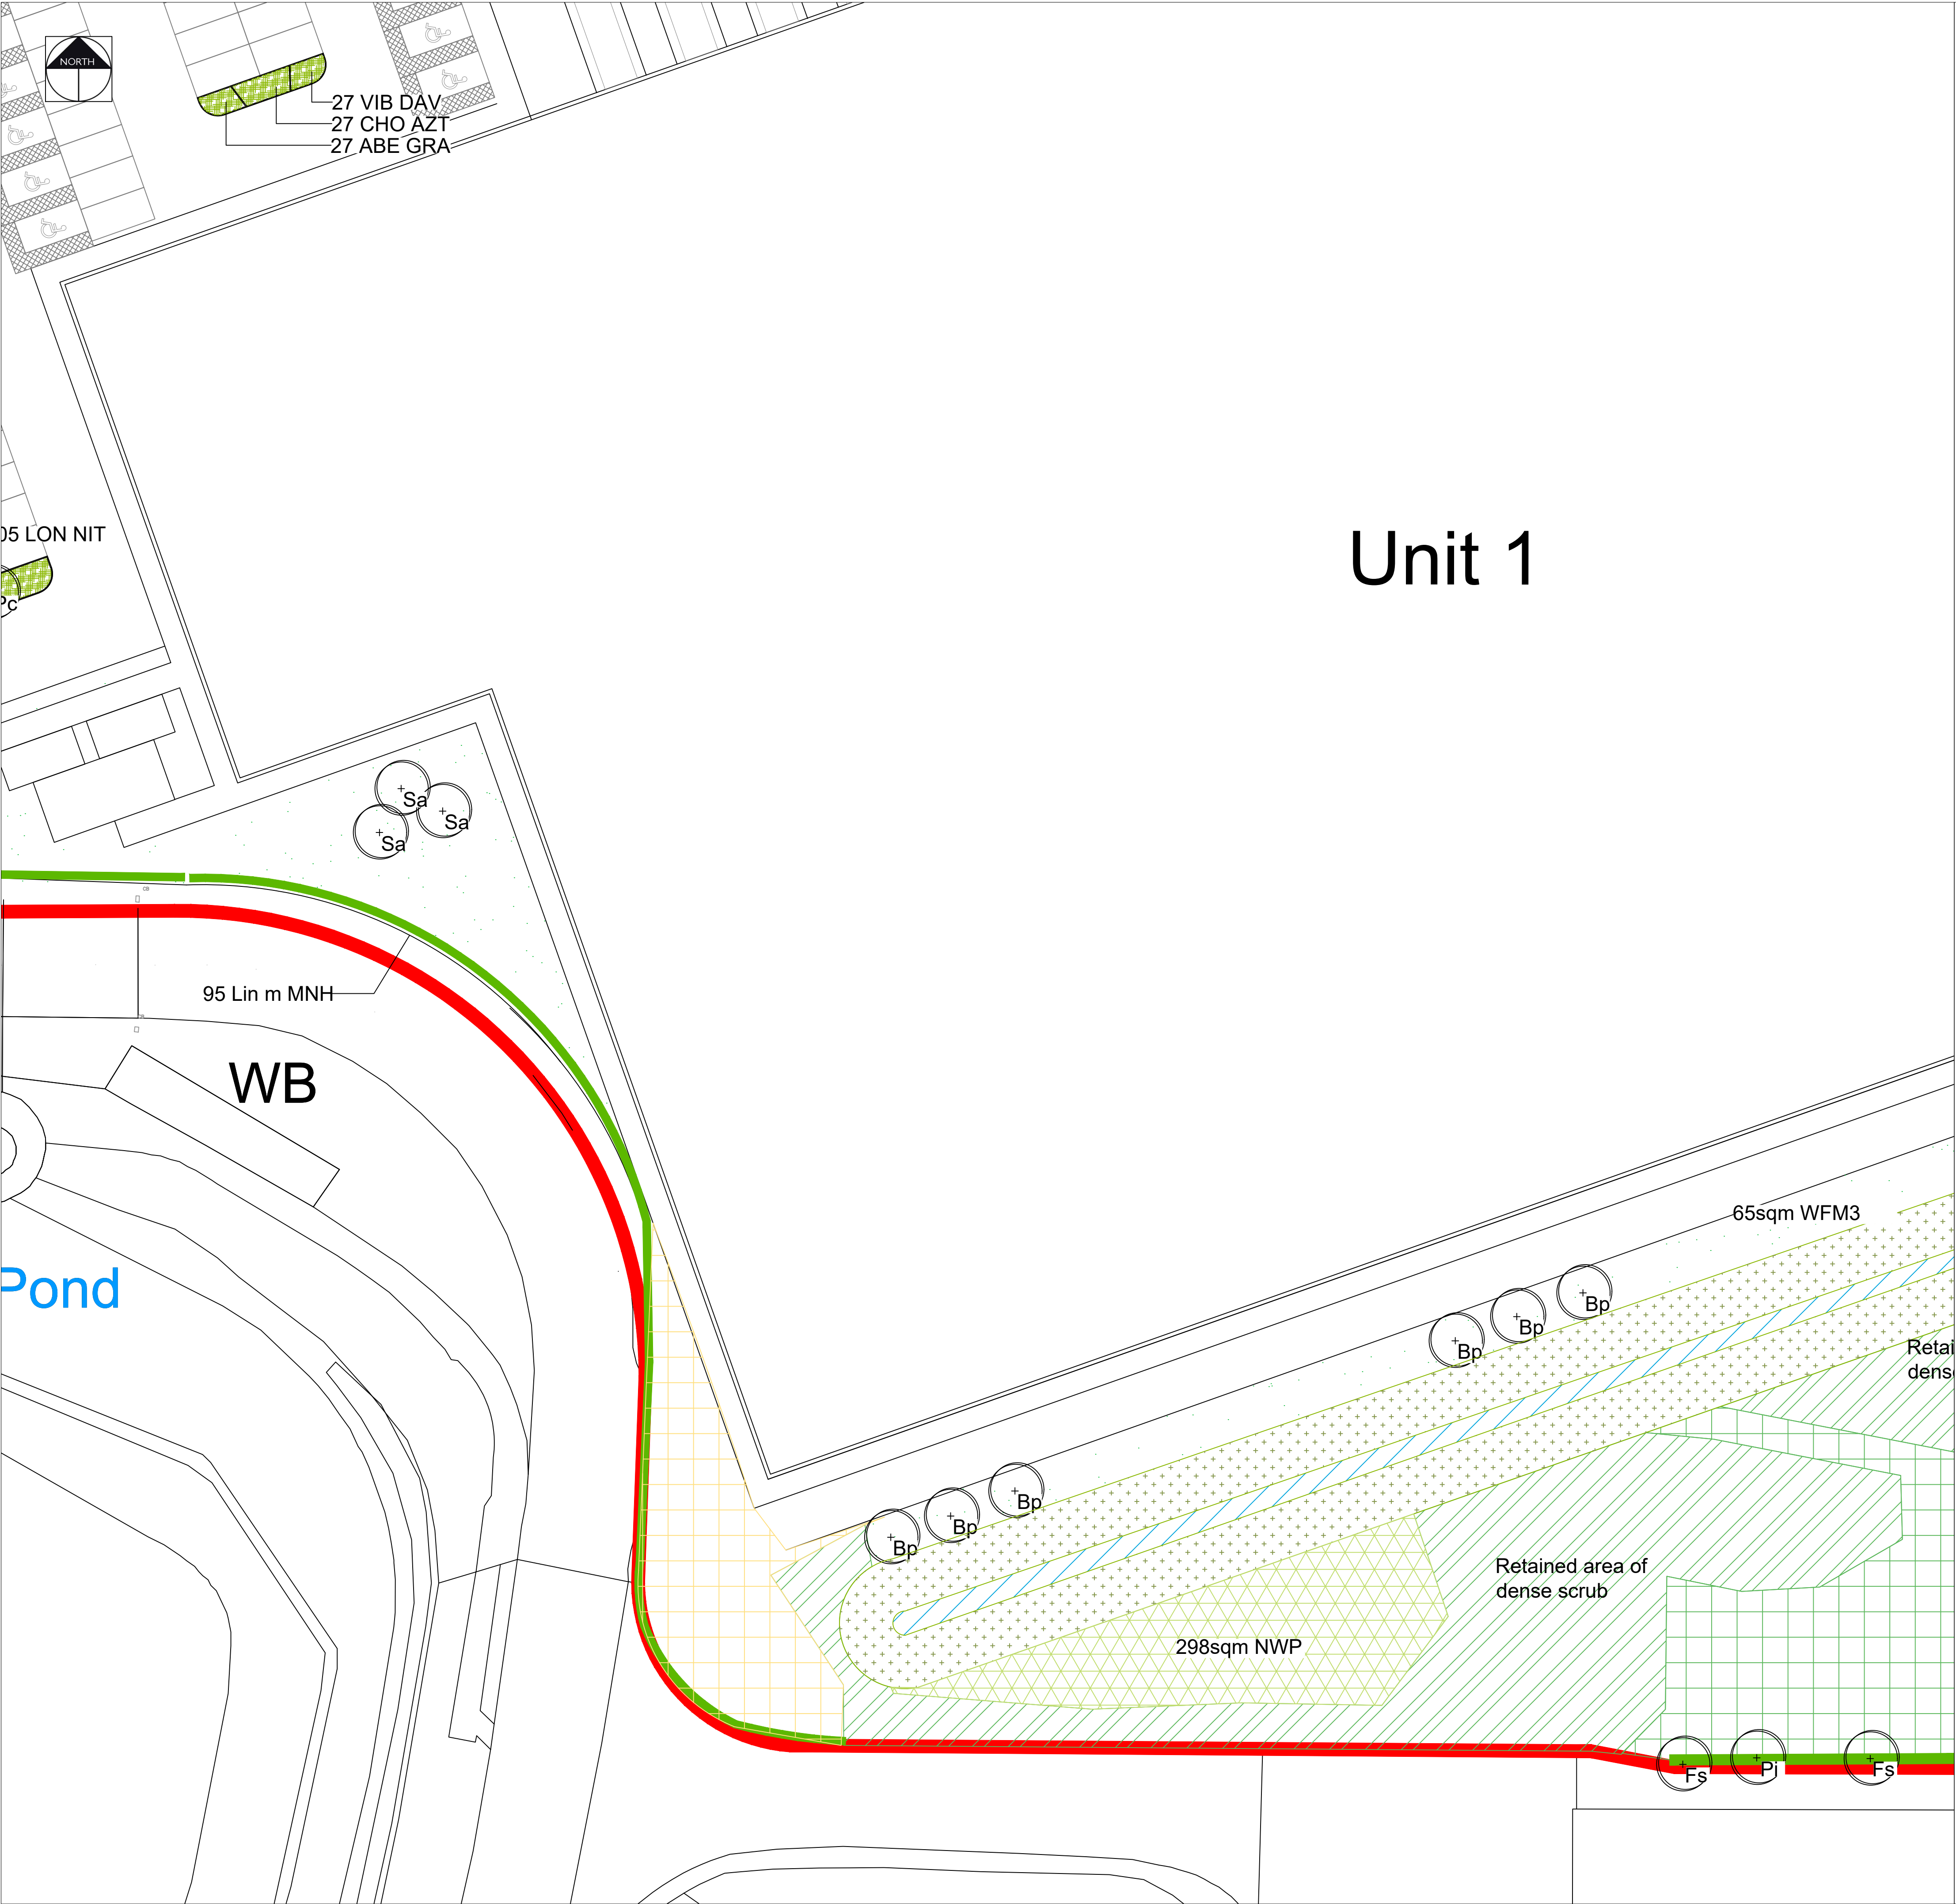

Unit 1

KEY	
	EXISTING VEGETATION - DENSE SCRUB <i>Please refer to the ecology report for details on species</i>
	EXISTING VEGETATION - WOODLAND <i>Please refer to the ecology report for details on species</i>
	EXISTING GRASSLAND <i>Areas of grassland to be retained. Please refer to the ecology report for details</i>
	EXISTING PONDS <i>Ponds to be retained</i>
	PROPOSED PONDS <i>Refer to Ecology Report for further details</i>
	MARSHY WET GRASSLAND <i>Refer to planting schedule for species and quantities and Ecology Report</i>
	WILDFLOWER GRASSLAND <i>Refer to planting schedule for details on species and quantities</i>
	TALL TUSSOCKY GRASSLAND <i>Refer to planting schedule for details on species and quantities</i>
	MIXED NATIVE HEDGEROW <i>Refer to planting schedule for details on species and quantities</i>
	BUTTERFLY / BEETLE WILDFLOWER MOUND <i>South facing mound planted in a wildflower mix. Refer to planting schedule for details on species and quantities</i>
	TREES <i>Refer to planting schedule for details on species and quantities</i>
	WET DITCH
	PATH <i>Maintained short grassland path</i>
	AMPHIBIAN AND REPTILE HIBERNACULA <i>Refer to Ecology Report for further information</i>
	LOG PILE
	MARGINAL PLANTING <i>Refer to planting schedule for details and quantities</i>
	DENSE SCRUB <i>Native whip planting. Refer to planting schedule for details and quantities</i>
	RETAINED DISTURBED AREAS <i>Areas of open mosaic disturbed ground with scattered scrub to remain as existing. Refer to UES Ecology Report for further details</i>
	OPEN MOSAIC GROUND <i>Areas of existing hardstanding / gravel to be broken up & allowed to naturally colonise with wildflower and scrub. Refer to UES Ecology Report for further details</i>
	SANDBANKS <i>Unvegetated sandbanks</i>
	AMPHIBIAN HIBERNACLA
	PROPOSED SHRUB BED <i>Please refer to the planting schedule for further details on species, quantities and nursery grades</i>

P4	27.03.23	Updated SuDS ponds	KLJ
P3	01.11.22	Revised to Architects layout + Drainage Strategy	KLJ
P2	14.09.22	Marginal planting to ponds	KLJ
P1	26.08.22	Initial Issue	KLJ
Rev	Date	Description	Initials
pgla landscape architects			
PGLA Ltd Landscape Architects Station Hop Offices 815 Stockport Road Manchester M19 3BS t: 0161 238 9138 e: info@pgla.co.uk w: www.pgla.co.uk			
Client FIREM			
Project 3A, KINGMOOR, WREXHAM			
Description PLANTING PLAN SHEET 5			
Status FOR PLANNING			
Scale 1:250@A1	Drawn KLJ	Checked PGG	Date AUG 2022
Job number WRE2206	Drawing number PP01.05	Revision P4	
Original size 100mm @ A1			



KEY			
	EXISTING VEGETATION - DENSE SCRUB	Please refer to the ecology report for details on species	
	EXISTING VEGETATION - WOODLAND	Please refer to the ecology report for details on species	
	EXISTING GRASSLAND	Areas of grassland to be retained. Please refer to the ecology report for details	
	EXISTING PONDS	Ponds to be retained	
	PROPOSED PONDS	Refer to Ecology Report for further details	
	MARSHY WET GRASSLAND	Refer to planting schedule for species and quantities and Ecology Report	
	WILDFLOWER GRASSLAND	Refer to planting schedule for details on species and quantities	
	TALL TUSSOCKY GRASSLAND	Refer to planting schedule for details on species and quantities	
	MIXED NATIVE HEDGEROW	Refer to planting schedule for details on species and quantities	
	BUTTERFLY / BEETLE WILDFLOWER MOUND	South facing mound planted in a wildflower mix. Refer to planting schedule for details on species and quantities	
	TREES	Refer to planting schedule for details on species and quantities	
	WET DITCH		
	PATH	Maintained short grassland path	
	AMPHIBIAN AND REPTILE HIBERNACULA	Refer to Ecology Report for further information	
	LOG PILE		
	MARGINAL PLANTING	Refer to planting schedule for details and quantities	
	DENSE SCRUB	Native whip planting. Refer to planting schedule for details and quantities	
	RETAINED DISTURBED AREAS	Areas of open mosaic disturbed ground with scattered scrub to remain as existing. Refer to UES Ecology Report for further details	
	OPEN MOSAIC GROUND	Areas of existing hardstanding / gravel to be broken up & allowed to naturally colonise with wildflower and scrub. Refer to UES Ecology Report for further details	
	SANDBANKS	Unvegetated sandbanks	
	AMPHIBIAN HIBERNACLA		
	PROPOSED SHRUB BED	Please refer to the planting schedule for further details on species, quantities and nursery grades	

Rev	Date	Description	Initials
P4	27.03.23	Updated SuDS ponds	KLJ
P3	01.11.22	Revised to Architects layout + Drainage Strategy	KLJ
P2	14.09.22	Marginal planting to ponds	KLJ
P1	26.08.22	Initial Issue	KLJ

PGLA Ltd
Landscape Architects
Station Hop Offices
815 Stockport Road
Manchester
M19 3BS

t: 0161 238 9138
e: info@pgla.co.uk
w: www.pgla.co.uk

Client

FIREM

Project

3A, KINGMOOR, WREXHAM

Description

PLANTING PLAN


SHEET 6

Status

FOR PLANNING

Scale	Drawn	Checked	Date
1:250@A1	KLJ	PGG	AUG 2022
Job number	Drawing number	Revision	
WRE2206	PP01.06	P4	

Original size 100mm @ A1

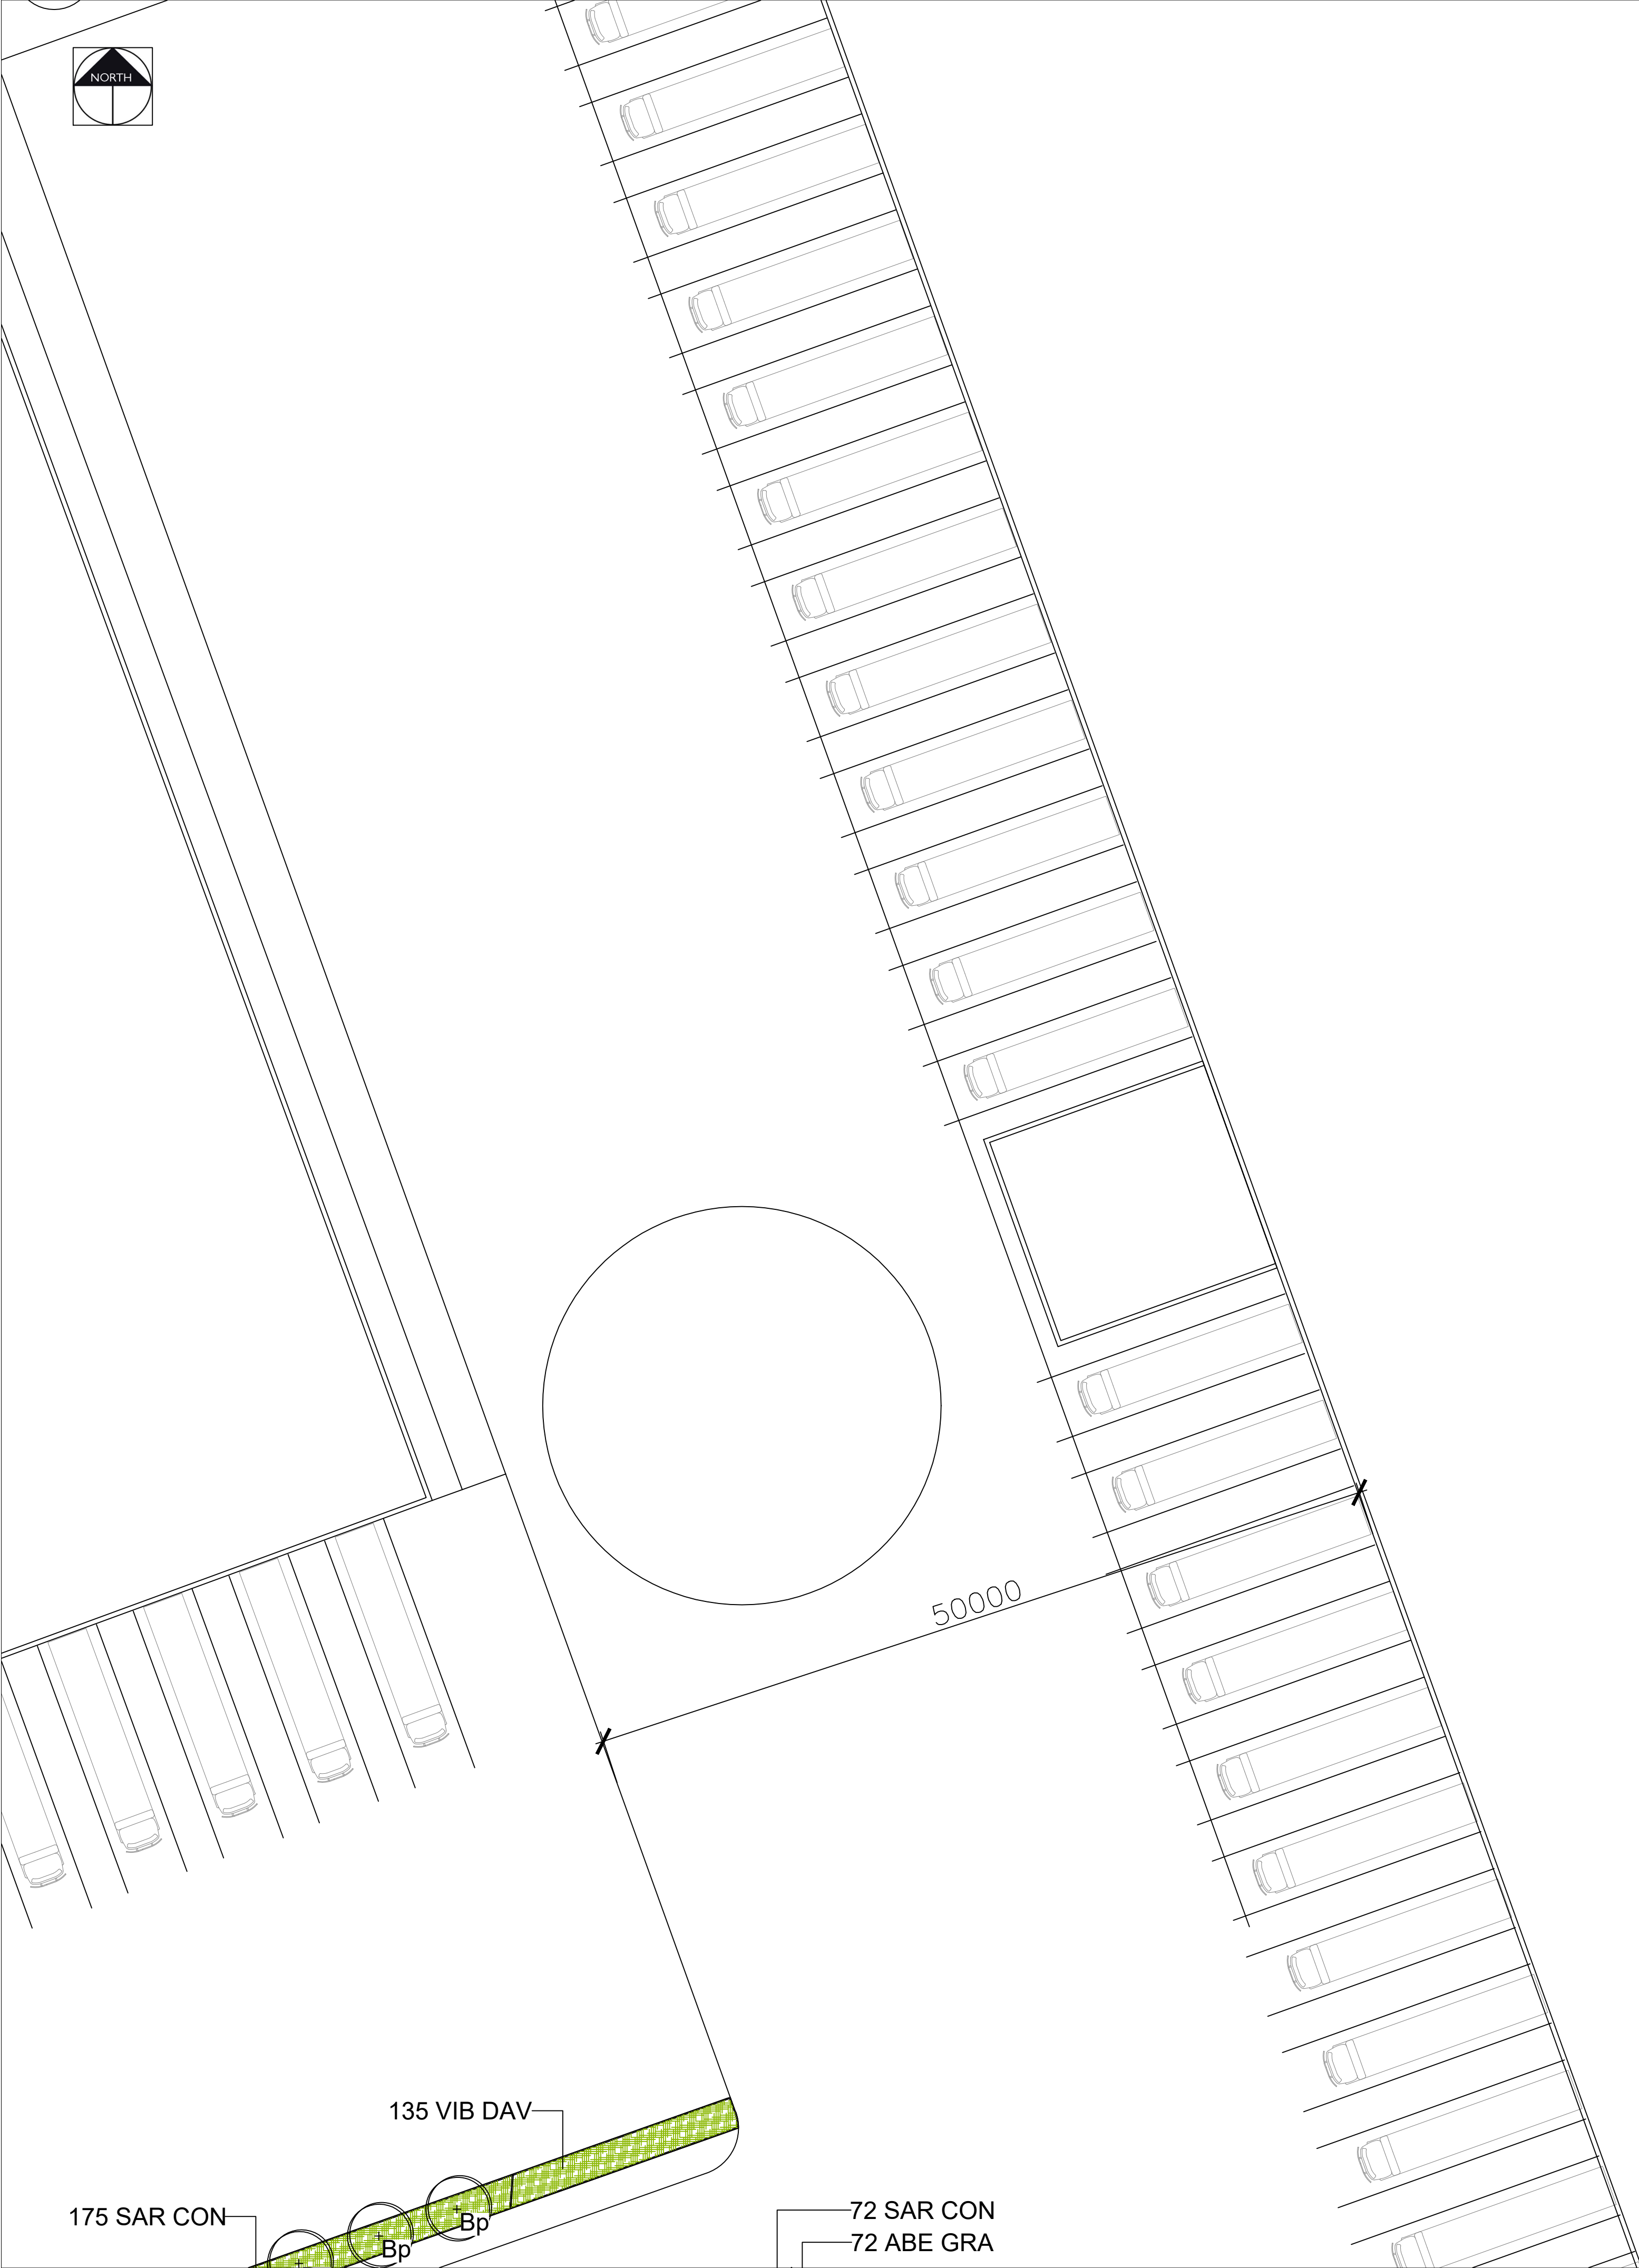

KEY

EXISTING VEGETATION - DENSE SCRUB
Please refer to the ecology report for details on species

EXISTING VEGETATION - WOODLAND
Please refer to the ecology report for details on species

EXISTING GRASSLAND
Areas of grassland to be retained. Please refer to the ecology report for details

EXISTING PONDS
Ponds to be retained

PROPOSED PONDS
Refer to Ecology Report for further details

MARSHY WET GRASSLAND
Refer to planting schedule for species and quantities and Ecology Report

WILDFLOWER GRASSLAND
Refer to planting schedule for details on species and quantities

TALL TUSSOCKY GRASSLAND
Refer to planting schedule for details on species and quantities

MIXED NATIVE HEDGEROW
Refer to planting schedule for details on species and quantities

BUTTERFLY / BEETLE WILDFLOWER MOUND
South facing mound planted in a wildflower mix. Refer to planting schedule for details on species and quantities

TREES
Refer to planting schedule for details on species and quantities

WET DITCH

PATH
Maintained short grassland path

AMPHIBIAN AND REPTILE HIBERNACULA
Refer to Ecology Report for further information

LOG PILE

MARGINAL PLANTING
Refer to planting schedule for details and quantities

DENSE SCRUB
Native whip planting. Refer to planting schedule for details and quantities

RETAINED DISTURBED AREAS
Areas of open mosaic disturbed ground with scattered scrub to remain as existing. Refer to UES Ecology Report for further details

OPEN MOSAIC GROUND
Areas of existing hardstanding / gravel to be broken up & allowed to naturally colonise with wildflower and scrub. Refer to UES Ecology Report for further details

SANDBANKS
Unvegetated sandbanks

AMPHIBIAN HIBERNACLA

PROPOSED SHRUB BED
Please refer to the planting schedule for further details on species, quantities and nursery grades

P4	27.03.23	Updated SuDS ponds	KLJ
P3	01.11.22	Revised to Architects layout + Drainage Strategy	KLJ
P2	14.09.22	Marginal planting to ponds	KLJ
P1	26.08.22	Initial Issue	KLJ
Rev	Date	Description	Initials

pgla

landscape architects

PGLA Ltd

Landscape Architects

Station Hop Offices

815 Stockport Road

Manchester

M19 3BS

t: 0161 238 9138

e: info@pgla.co.uk

w: www.pgla.co.uk

Client

FIREM

Project

3A, KINGMOOR, WREXHAM

Description

PLANTING PLAN

SHEET 7

Status

FOR PLANNING

Scale

1:250@A1

Drawn

KLJ

Checked

PGG

Date

AUG 2022

Job number

WRE2206

Drawing number

PP01.07

Revision

P4

Original size 100mm @ A1



KEY

EXISTING VEGETATION - DENSE SCRUB
Please refer to the ecology report for details on species

EXISTING VEGETATION - WOODLAND
Please refer to the ecology report for details on species

EXISTING GRASSLAND
Areas of grassland to be retained. Please refer to the ecology report for details

EXISTING PONDS
Ponds to be retained

PROPOSED PONDS
Refer to Ecology Report for further details

MARSHY WET GRASSLAND
Refer to planting schedule for species and quantities and Ecology Report

WILDFLOWER GRASSLAND
Refer to planting schedule for details on species and quantities

TALL TUSSOCKY GRASSLAND
Refer to planting schedule for details on species and quantities

MIXED NATIVE HEDGEROW
Refer to planting schedule for details on species and quantities

BUTTERFLY / BEETLE WILDFLOWER MOUND
South facing mound planted in a wildflower mix. Refer to planting schedule for details on species and quantities

TREES
Refer to planting schedule for details on species and quantities

WET DITCH

PATH
Maintained short grassland path

AMPHIBIAN AND REPTILE HIBERNACULA
Refer to Ecology Report for further information

LOG PILE

MARGINAL PLANTING
Refer to planting schedule for details and quantities

DENSE SCRUB
Native whip planting. Refer to planting schedule for details and quantities

RETAINED DISTURBED AREAS
Areas of open mosaic disturbed ground with scattered scrub to remain as existing. Refer to UES Ecology Report for further details

OPEN MOSAIC GROUND
Areas of existing hardstanding / gravel to be broken up & allowed to naturally colonise with wildflower and scrub. Refer to UES Ecology Report for further details

SANDBANKS
Unvegetated sandbanks

AMPHIBIAN HIBERNACLA

PROPOSED SHRUB BED
Please refer to the planting schedule for further details on species, quantities and nursery grades

P4	27.03.23	Updated SuDS ponds	KLJ
P3	01.11.22	Revised to Architects layout + Drainage Strategy	KLJ
P2	14.09.22	Marginal planting to ponds	KLJ
P1	26.08.22	Initial Issue	KLJ
Rev	Date	Description	Initials

PGLA Ltd
Landscape Architects
Station Hop Offices
815 Stockport Road
Manchester
M19 3BS

t: 0161 238 9138
e: info@pgla.co.uk
w: www.pgla.co.uk

Client	FIREM
Project	3A, KINGMOOR, WREXHAM
Description	PLANTING PLAN SHEET 8
Status	FOR DISCUSSION
Scale	1:250@A1
Job number	WRE2206
Drawn	KLJ
Checked	PGG
Date	AUG 2022
Revision	P4

Original size 100mm @ A1



 EXISTING VEGETATION - DENSE SCRUB
Please refer to the ecology report for details on species

 EXISTING VEGETATION - WOODLAND
Please refer to the ecology report for details on species

 EXISTING GRASSLAND
Areas of grassland to be retained. Please refer to the ecology report for details

 EXISTING PONDS
Ponds to be retained

 PROPOSED PONDS
Refer to Ecology Report for further details

 MARSHY WET GRASSLAND
Refer to planting schedule for species and quantities and Ecology Report

 WILDFLOWER GRASSLAND
Refer to planting schedule for details on species and quantities

 TALL TUSsocky GRASSLAND
Refer to planting schedule for details on species and quantities

 MIXED NATIVE HEDGEROW
Refer to planting schedule for details on species and quantities

 BUTTERFLY / BEETLE WILDFLOWER MOUND
South facing mound planted in a wildflower mix. Refer to planting schedule for details on species and quantities

 TREES
Refer to planting schedule for details on species and quantities

 WET DITCH

 PATH
Maintained short grassland path

 AMPHIBIAN AND REPTILE HIBERNACULA
Refer to Ecology Report for further information

 LOG PILE

 MARGINAL PLANTING
Refer to planting schedule for details and quantities

 DENSE SCRUB
Native whip planting. Refer to planting schedule for details and quantities

 RETAINED DISTURBED AREAS
Areas of open mosaic disturbed ground with scattered scrub to remain as existing. Refer to UES Ecology Report for further details


 OPEN MOSAIC GROUND
Areas of existing hardstanding / gravel to be broken up & allowed to naturally colonise with wildflower and scrub. Refer to UES Ecology Report for further details

 SANDBANKS
Unvegetated sandbanks

 AMPHIBIAN HIBERNACLA


 PROPOSED SHRUB BED
Please refer to the planting schedule for further details on species, quantities and nursery grades












					
PGLA Ltd Landscape Architects Station Hop Offices 815 Stockport Road Manchester M19 3BS					
t: 0161 238 9138 e: info@pgla.co.uk w: www.pgla.co.uk					
Client					
FIREM					
Project					
3A, KINGMOOR, WREXHAM					
Description					
PLANTING PLAN					
SHEET 9					
Status					
FOR DISCUSSION					
Scale	Drawn	Checked	Date		
1:250@A1	KLJ	PGG	AUG 2022		
Job number	Drawing number	Revision			
WRE2206	PP01.09	P4			

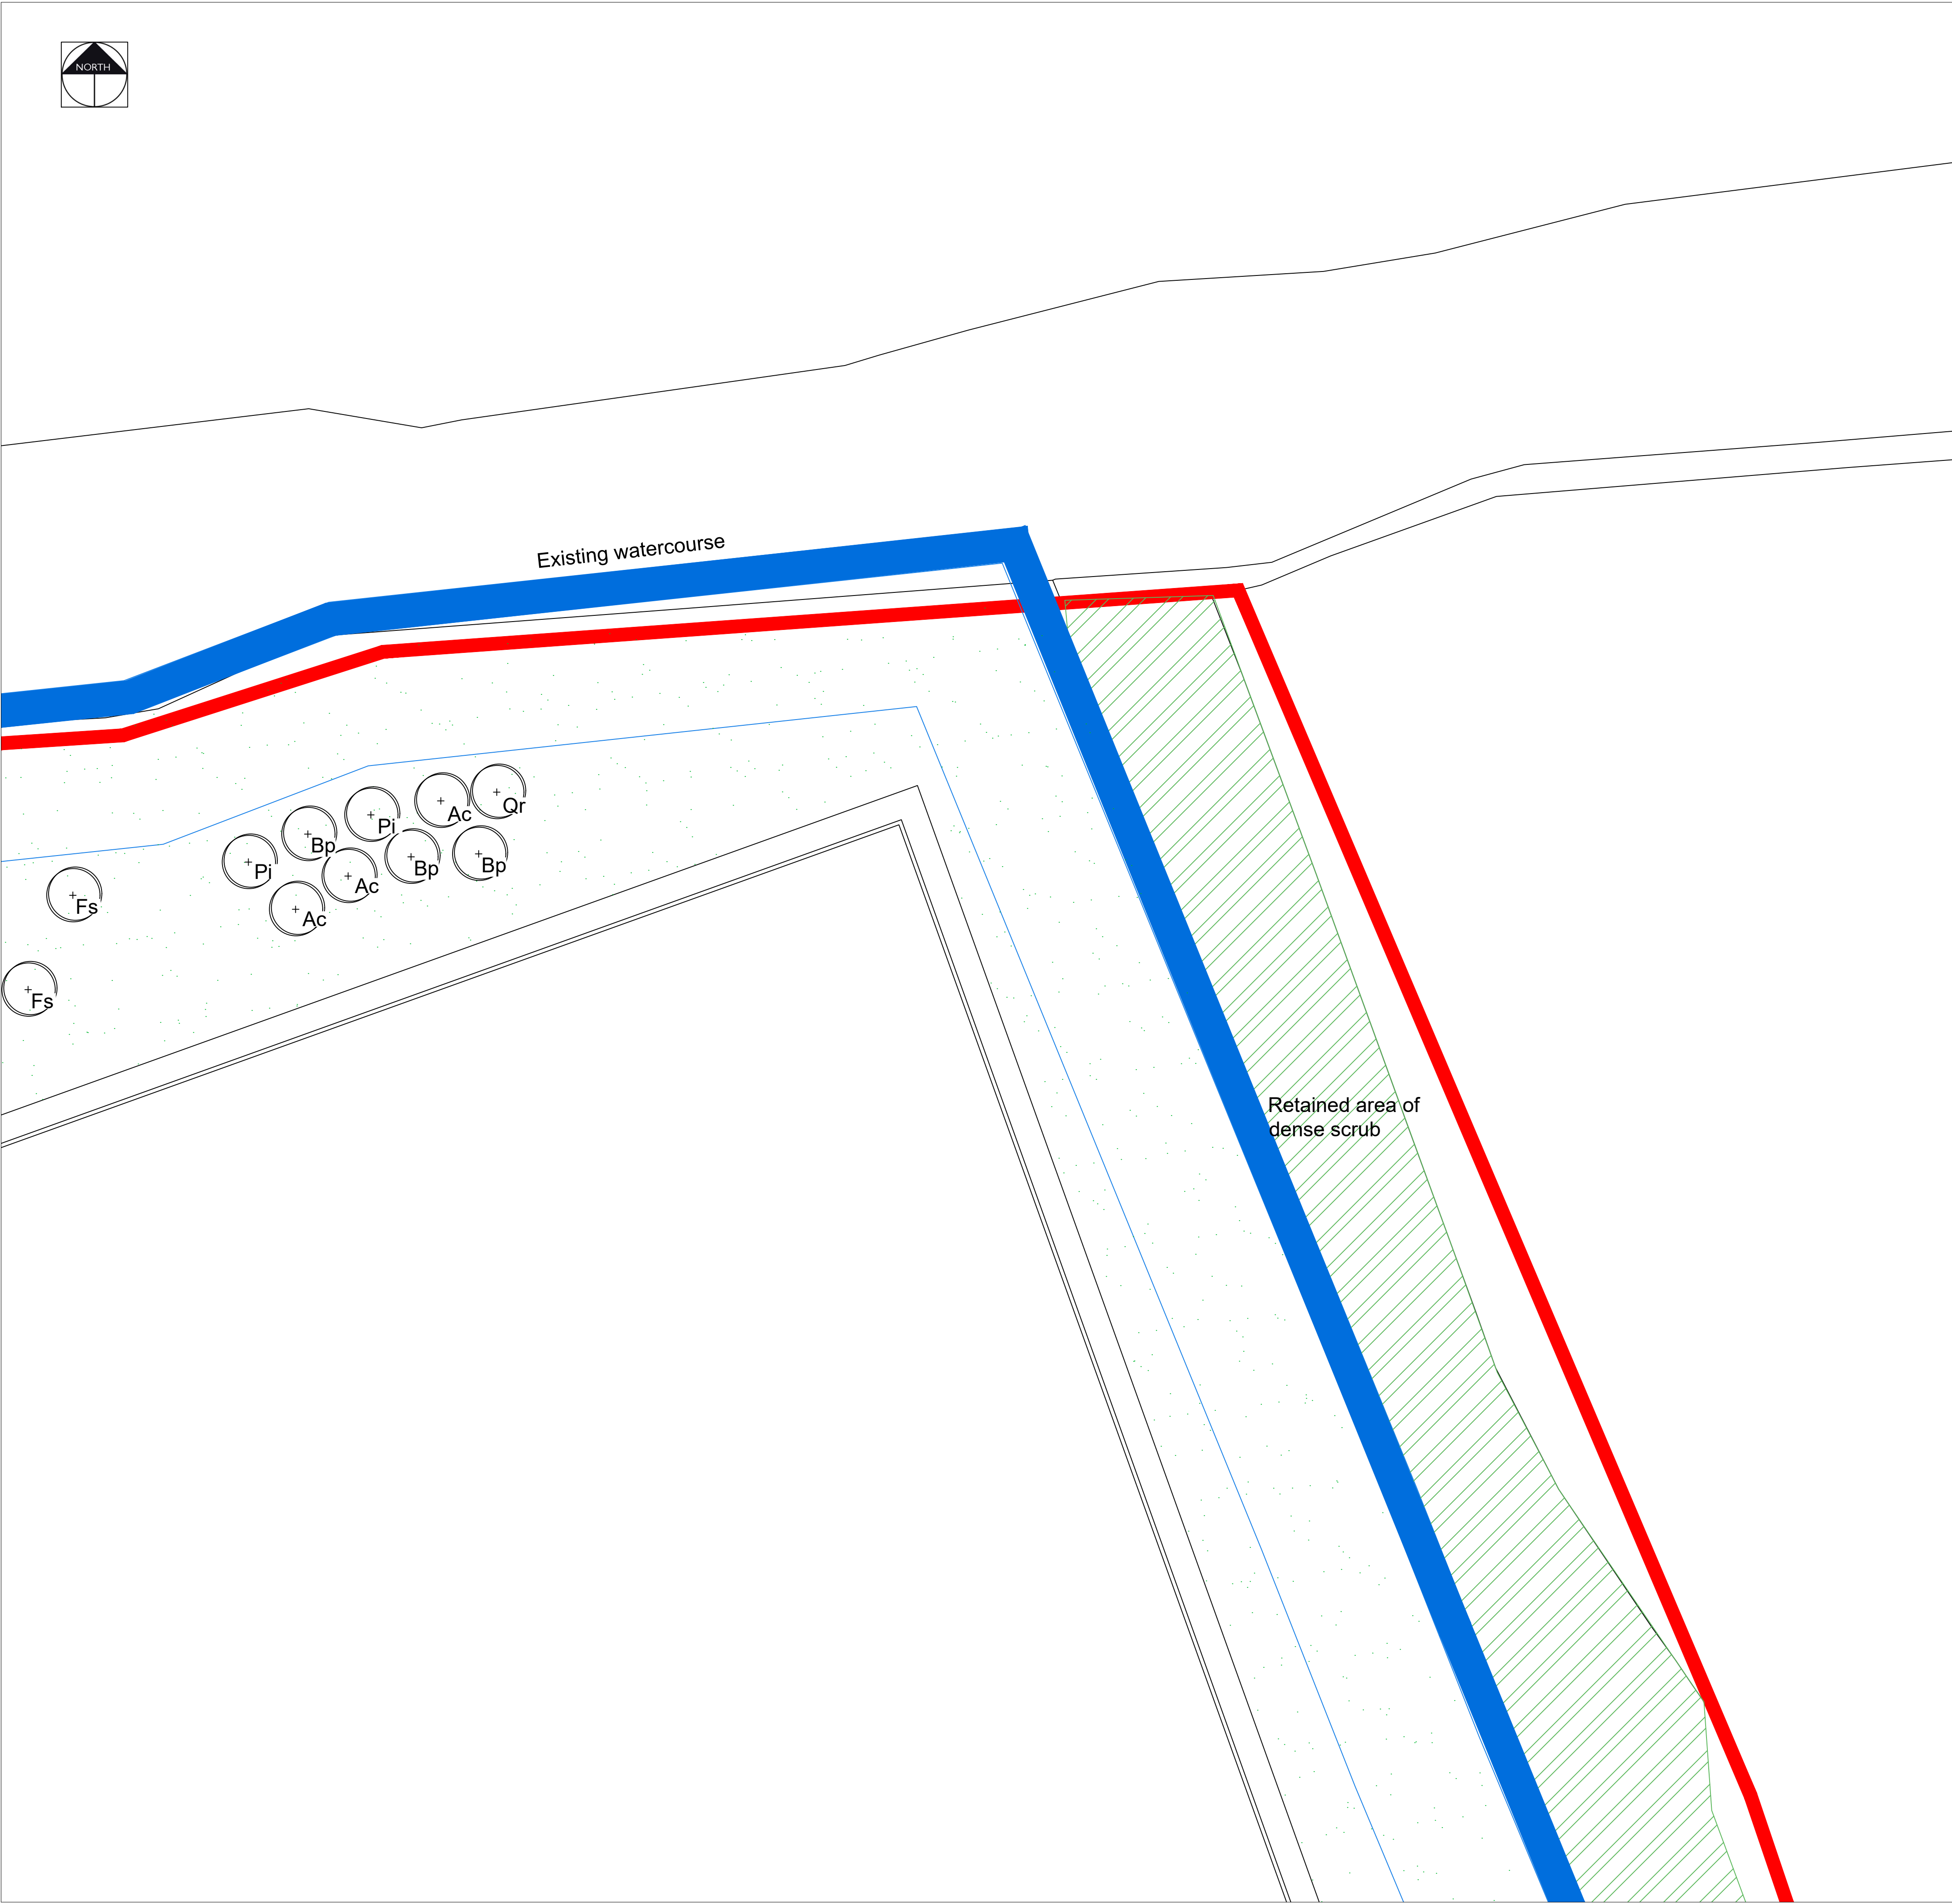

	EXISTING VEGETATION - DENSE SCRUB <i>Please refer to the ecology report for details on species</i>
	EXISTING VEGETATION - WOODLAND <i>Please refer to the ecology report for details on species</i>
	EXISTING GRASSLAND <i>Areas of grassland to be retained. Please refer to the ecology report for details</i>
	EXISTING PONDS <i>Ponds to be retained</i>
	PROPOSED PONDS <i>Refer to Ecology Report for further details</i>
	MARSHY WET GRASSLAND <i>Refer to planting schedule for species and quantities and Ecology Report</i>
	WILDFLOWER GRASSLAND <i>Refer to planting schedule for details on species and quantities</i>
	TALL TUSSOCKY GRASSLAND <i>Refer to planting schedule for details on species and quantities</i>
	MIXED NATIVE HEDGEROW <i>Refer to planting schedule for details on species and quantities</i>
	BUTTERFLY / BEETLE WILDFLOWER MOUND <i>South facing mound planted in a wildflower mix. Refer to planting schedule for details on species and quantities</i>
	TREES <i>Refer to planting schedule for details on species and quantities</i>
	WET DITCH
	PATH <i>Maintained short grassland path</i>
	AMPHIBIAN AND REPTILE HIBERNACULA <i>Refer to Ecology Report for further information</i>
	LOG PILE
	MARGINAL PLANTING <i>Refer to planting schedule for details and quantities</i>
	DENSE SCRUB <i>Native whip planting. Refer to planting schedule for details and quantities</i>
	RETAINED DISTURBED AREAS <i>Areas of open mosaic disturbed ground with scattered scrub to remain as existing. Refer to UES Ecology Report for further details</i>
	OPEN MOSAIC GROUND <i>Areas of existing hardstanding / gravel to be broken up & allowed to naturally colonise with wildflower and scrub. Refer to UES Ecology Report for further details</i>
	SANDBANKS <i>Unvegetated sandbanks</i>
	AMPHIBIAN HIBERNACULA
	PROPOSED SHRUB BED <i>Please refer to the planting schedule for further details on species, quantities and nursery grades</i>

			
PGLA Ltd Landscape Architects Station Hop Offices 815 Stockport Road Manchester M19 3BS t: 0161 238 9138 e: info@pgla.co.uk w: www.pgla.co.uk			
Client			
FIREM			
Project			
3A, KINGMOOR, WREXHAM			
Description			
PLANTING PLAN			
SHEET 10			
Status			
FOR PLANNING			
Scale	Drawn	Checked	Date
1:250@A1	KLJ	PGG	OCT 2022
Job number	Drawing number	Revision	
WRE2006	PP01.10	P4	
Original size 100mm @ A1			

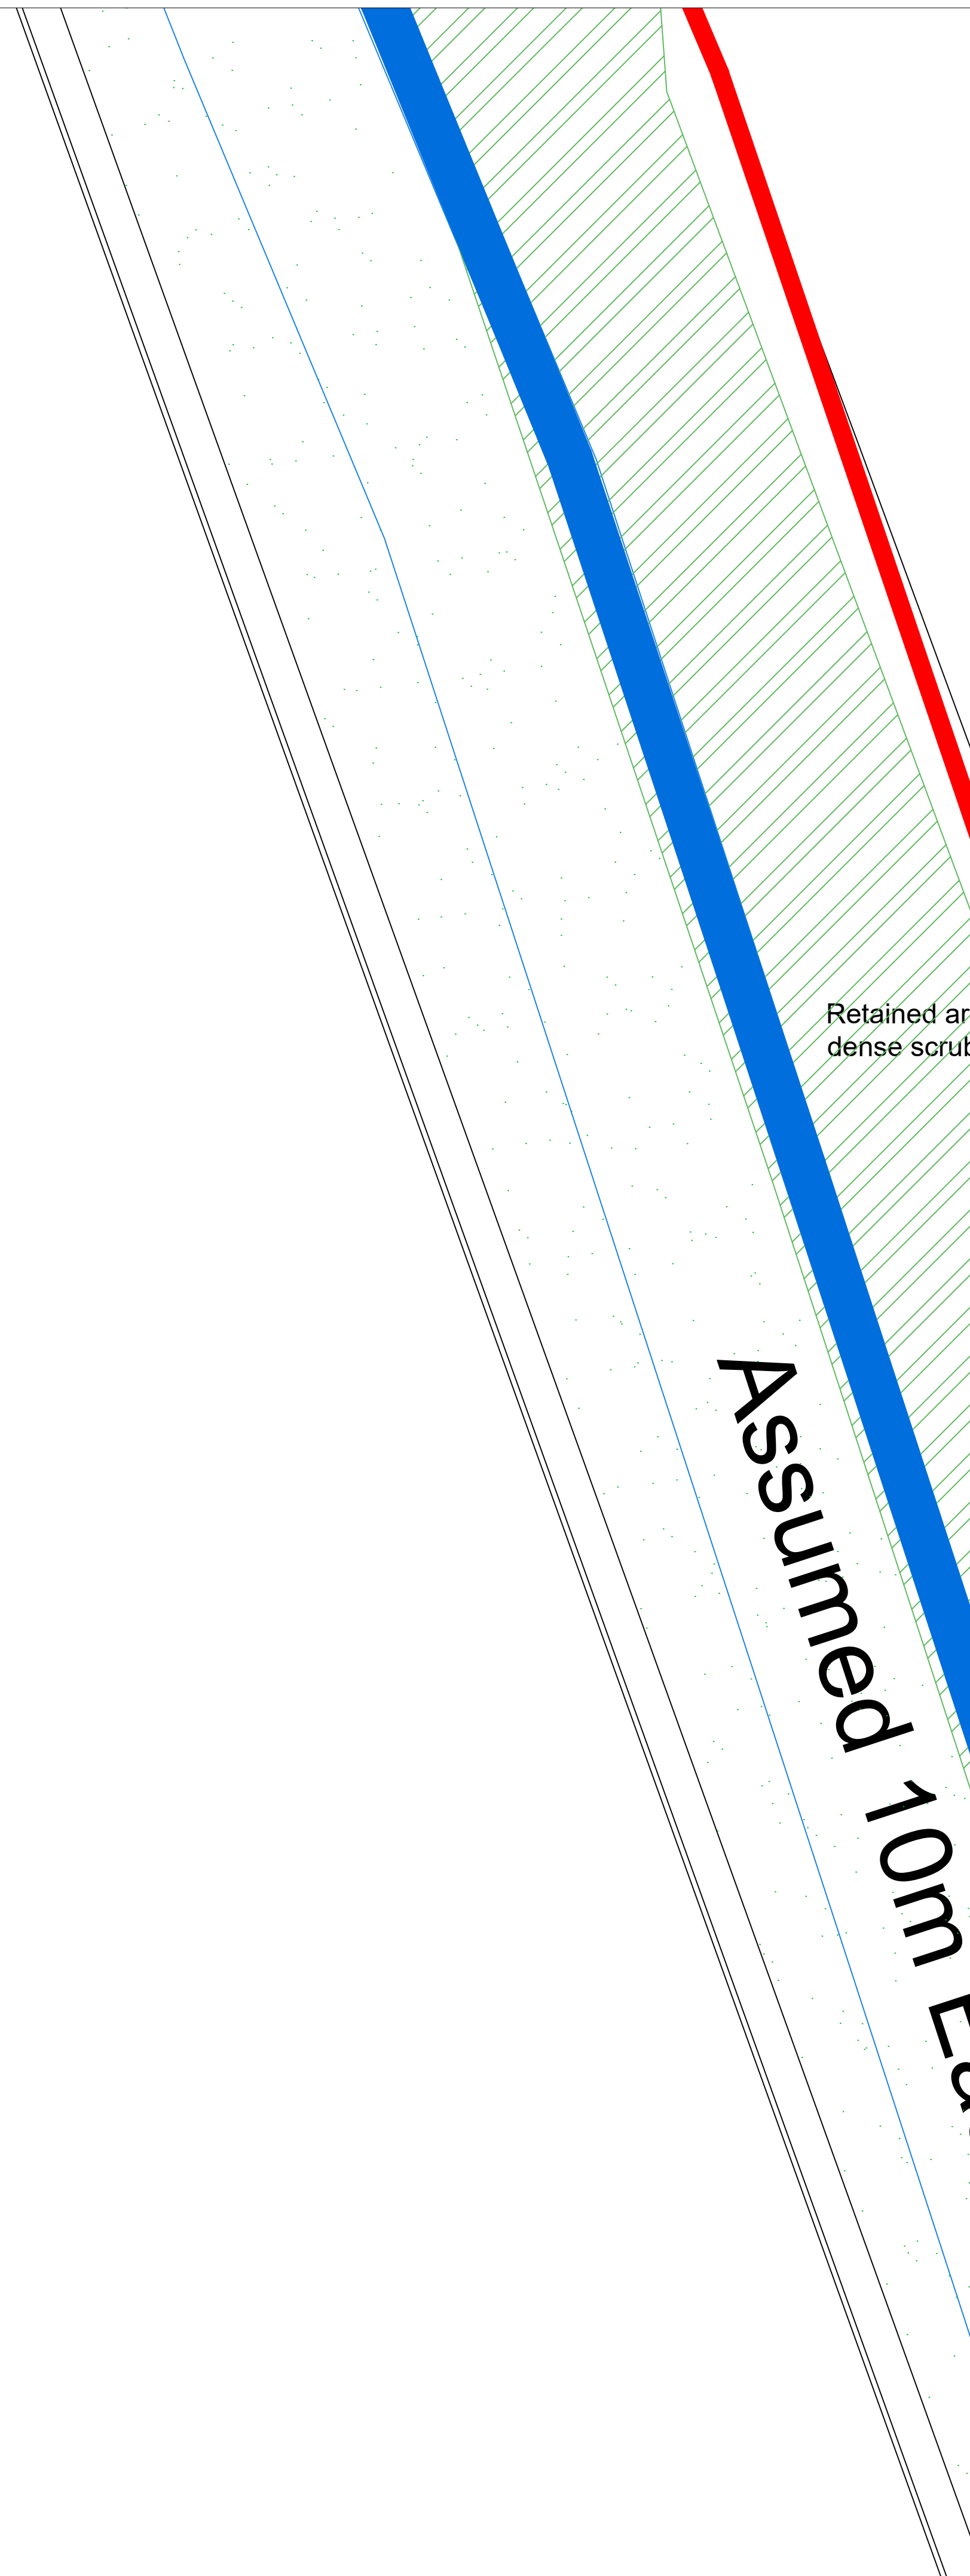

	EXISTING VEGETATION - DENSE SCRUB <i>Please refer to the ecology report for details on species</i>
	EXISTING VEGETATION - WOODLAND <i>Please refer to the ecology report for details on species</i>
	EXISTING GRASSLAND <i>Areas of grassland to be retained. Please refer to the ecology report for details</i>
	EXISTING PONDS <i>Ponds to be retained</i>
	PROPOSED PONDS <i>Refer to Ecology Report for further details</i>
	MARSHY WET GRASSLAND <i>Refer to planting schedule for species and quantities and Ecology Report</i>
	WILDFLOWER GRASSLAND <i>Refer to planting schedule for details on species and quantities</i>
	TALL TUSSOCKY GRASSLAND <i>Refer to planting schedule for details on species and quantities</i>
	MIXED NATIVE HEDGEROW <i>Refer to planting schedule for details on species and quantities</i>
	BUTTERFLY / BEETLE WILDFLOWER MOUND <i>South facing mound planted in a wildflower mix. Refer to planting schedule for details on species and quantities</i>
	TREES <i>Refer to planting schedule for details on species and quantities</i>
	WET DITCH
	PATH <i>Maintained short grassland path</i>
	AMPHIBIAN AND REPTILE HIBERNACULA <i>Refer to Ecology Report for further information</i>
	LOG PILE
	MARGINAL PLANTING <i>Refer to planting schedule for details and quantities</i>
	DENSE SCRUB <i>Native whip planting. Refer to planting schedule for details and quantities</i>
	RETAINED DISTURBED AREAS <i>Areas of open mosaic disturbed ground with scattered scrub to remain as existing. Refer to UES Ecology Report for further details</i>
	OPEN MOSAIC GROUND <i>Areas of existing hardstanding / gravel to be broken up & allowed to naturally colonise with wildflower and scrub. Refer to UES Ecology Report for further details</i>
	SANDBANKS <i>Unvegetated sandbanks</i>
	AMPHIBIAN HIBERNACLA
	PROPOSED SHRUB BED <i>Please refer to the planting schedule for further details on species, quantities and nursery grades</i>

P4	27.03.23	Updated SuDS ponds	KLJ
P3	01.11.22	Revised to Architects layout + Drainage Strategy	KLJ
P2	14.09.22	Marginal planting to ponds	KLJ
P1	26.08.22	Initial Issue	KLJ
Rev	Date	Description	Initials



PGLA Ltd
Landscape Architects
Station Hop Offices
815 Stockport Road
Manchester
M19 3BS

t: 0161 238 9138
e: info@ppla.co.uk
w: www.ppla.co.uk

Client

FIREM

Project



3A, KINGMOOR, WREXHAM

Description

PLANTING PLAN

SHEET 11

Status			
FOR PLANNING			
Scale	Drawn	Checked	Date
1:250@A1	KLJ	PGG	OCT 2022
Job number	Drawing number		Revision
WRE2206	PP01.11		P4

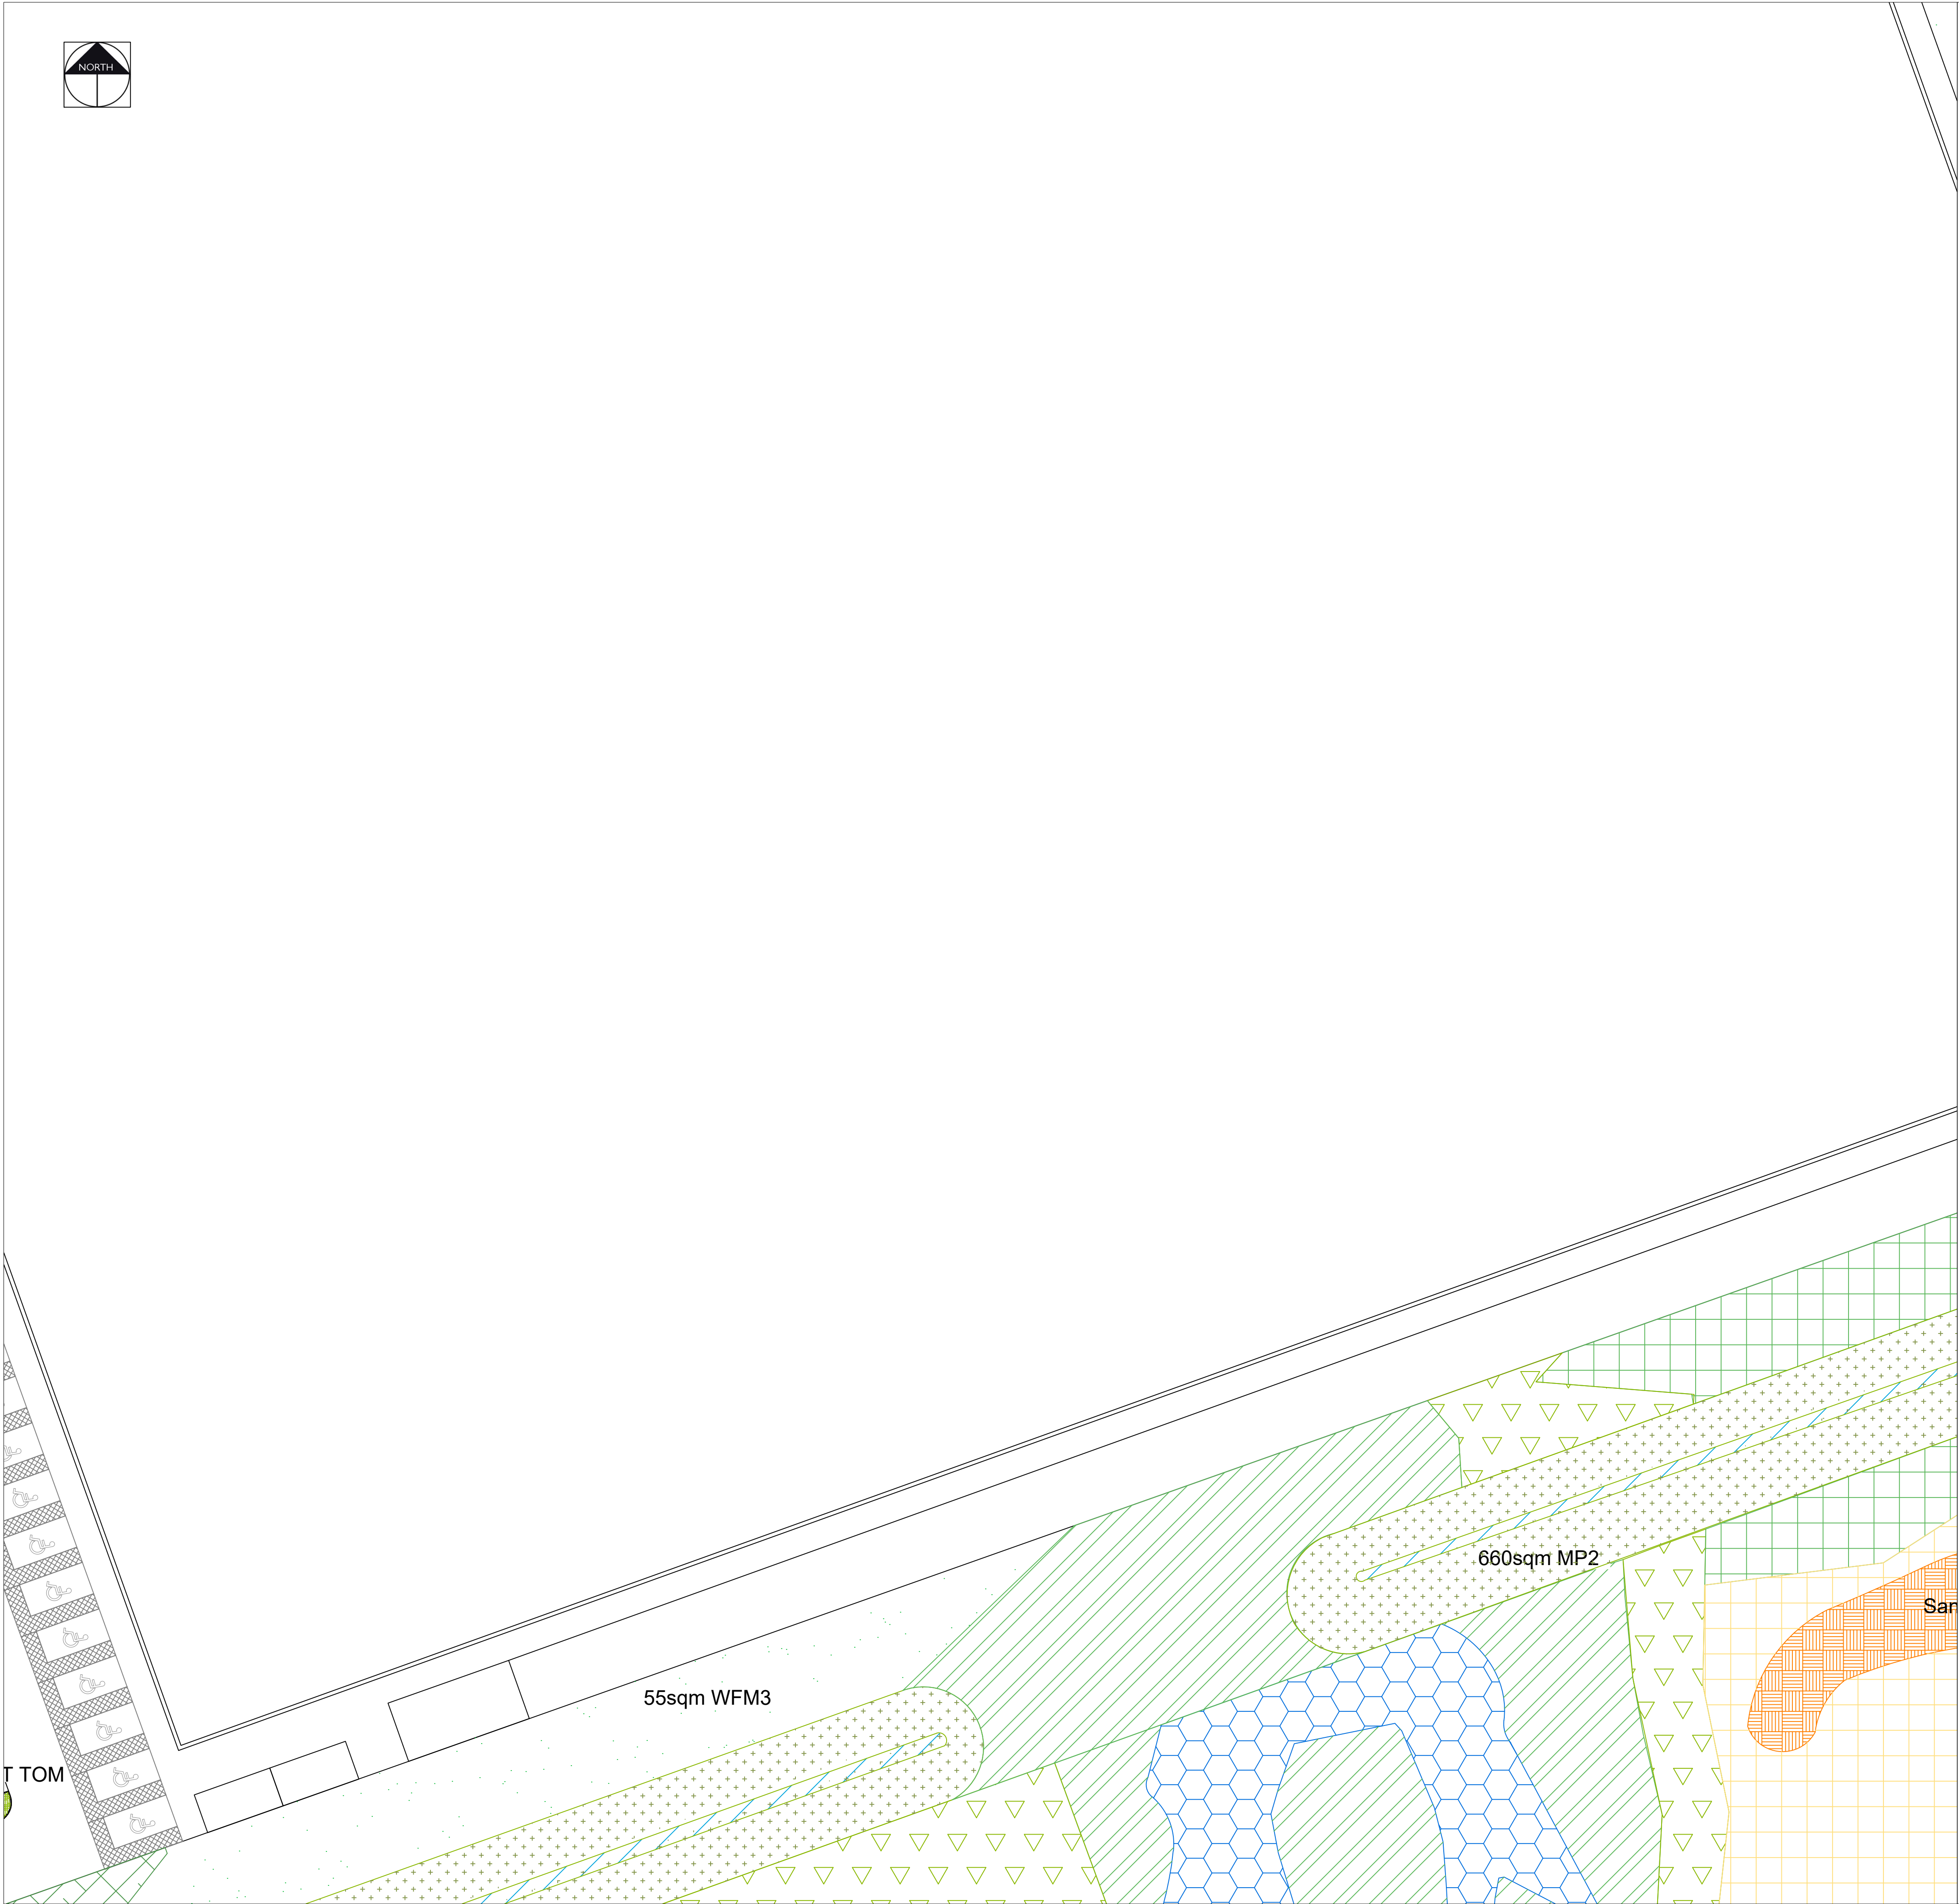

KEY

EXISTING VEGETATION - DENSE SCRUB
Please refer to the ecology report for details on species

EXISTING VEGETATION - WOODLAND
Please refer to the ecology report for details on species

EXISTING GRASSLAND
Areas of grassland to be retained. Please refer to the ecology report for details

EXISTING PONDS
Ponds to be retained

PROPOSED PONDS
Refer to Ecology Report for further details

MARSHY WET GRASSLAND
Refer to planting schedule for species and quantities and Ecology Report

WILDFLOWER GRASSLAND
Refer to planting schedule for details on species and quantities

TALL TUSSOCKY GRASSLAND
Refer to planting schedule for details on species and quantities

MIXED NATIVE HEDGEROW
Refer to planting schedule for details on species and quantities

BUTTERFLY / BEETLE WILDFLOWER MOUND
South facing mound planted in a wildflower mix. Refer to planting schedule for details on species and quantities

TREES
Refer to planting schedule for details on species and quantities

WET DITCH

PATH
Maintained short grassland path

AMPHIBIAN AND REPTILE HIBERNACULA
Refer to Ecology Report for further information

LOG PILE

MARGINAL PLANTING
Refer to planting schedule for details and quantities

DENSE SCRUB
Native whip planting. Refer to planting schedule for details and quantities

RETAINED DISTURBED AREAS
Areas of open mosaic disturbed ground with scattered scrub to remain as existing. Refer to UES Ecology Report for further details

OPEN MOSAIC GROUND
Areas of existing hardstanding / gravel to be broken up & allowed to naturally colonise with wildflower and scrub. Refer to UES Ecology Report for further details

SANDBANKS
Unvegetated sandbanks

AMPHIBIAN HIBERNACULA

PROPOSED SHRUB BED
Please refer to the planting schedule for further details on species, quantities and nursery grades

P4	27.03.23	Updated SuDS ponds	KLJ
P3	01.11.22	Revised to Architects layout + Drainage Strategy	KLJ
P2	14.09.22	Marginal planting to ponds	KLJ
P1	26.08.22	Initial Issue	KLJ
Rev	Date	Description	Initials

pgla

landscape architects

PGLA Ltd

Landscape Architects

Station Hop Offices

815 Stockport Road

Manchester

M19 3BS

t: 0161 238 9138

e: info@pgla.co.uk

w: www.pgla.co.uk

Client

FIREM

Project

3A, KINGMOOR, WREXHAM

Description

PLANTING PLAN

SHEET 12

Status

FOR PLANNING

Scale

1:250@A1

Drawn

KLJ

Checked

PGG

Date

OCT 2022

Job number

WRE2206


Drawing number

PP01.12

Revision


P4

Original size 100mm @ A1

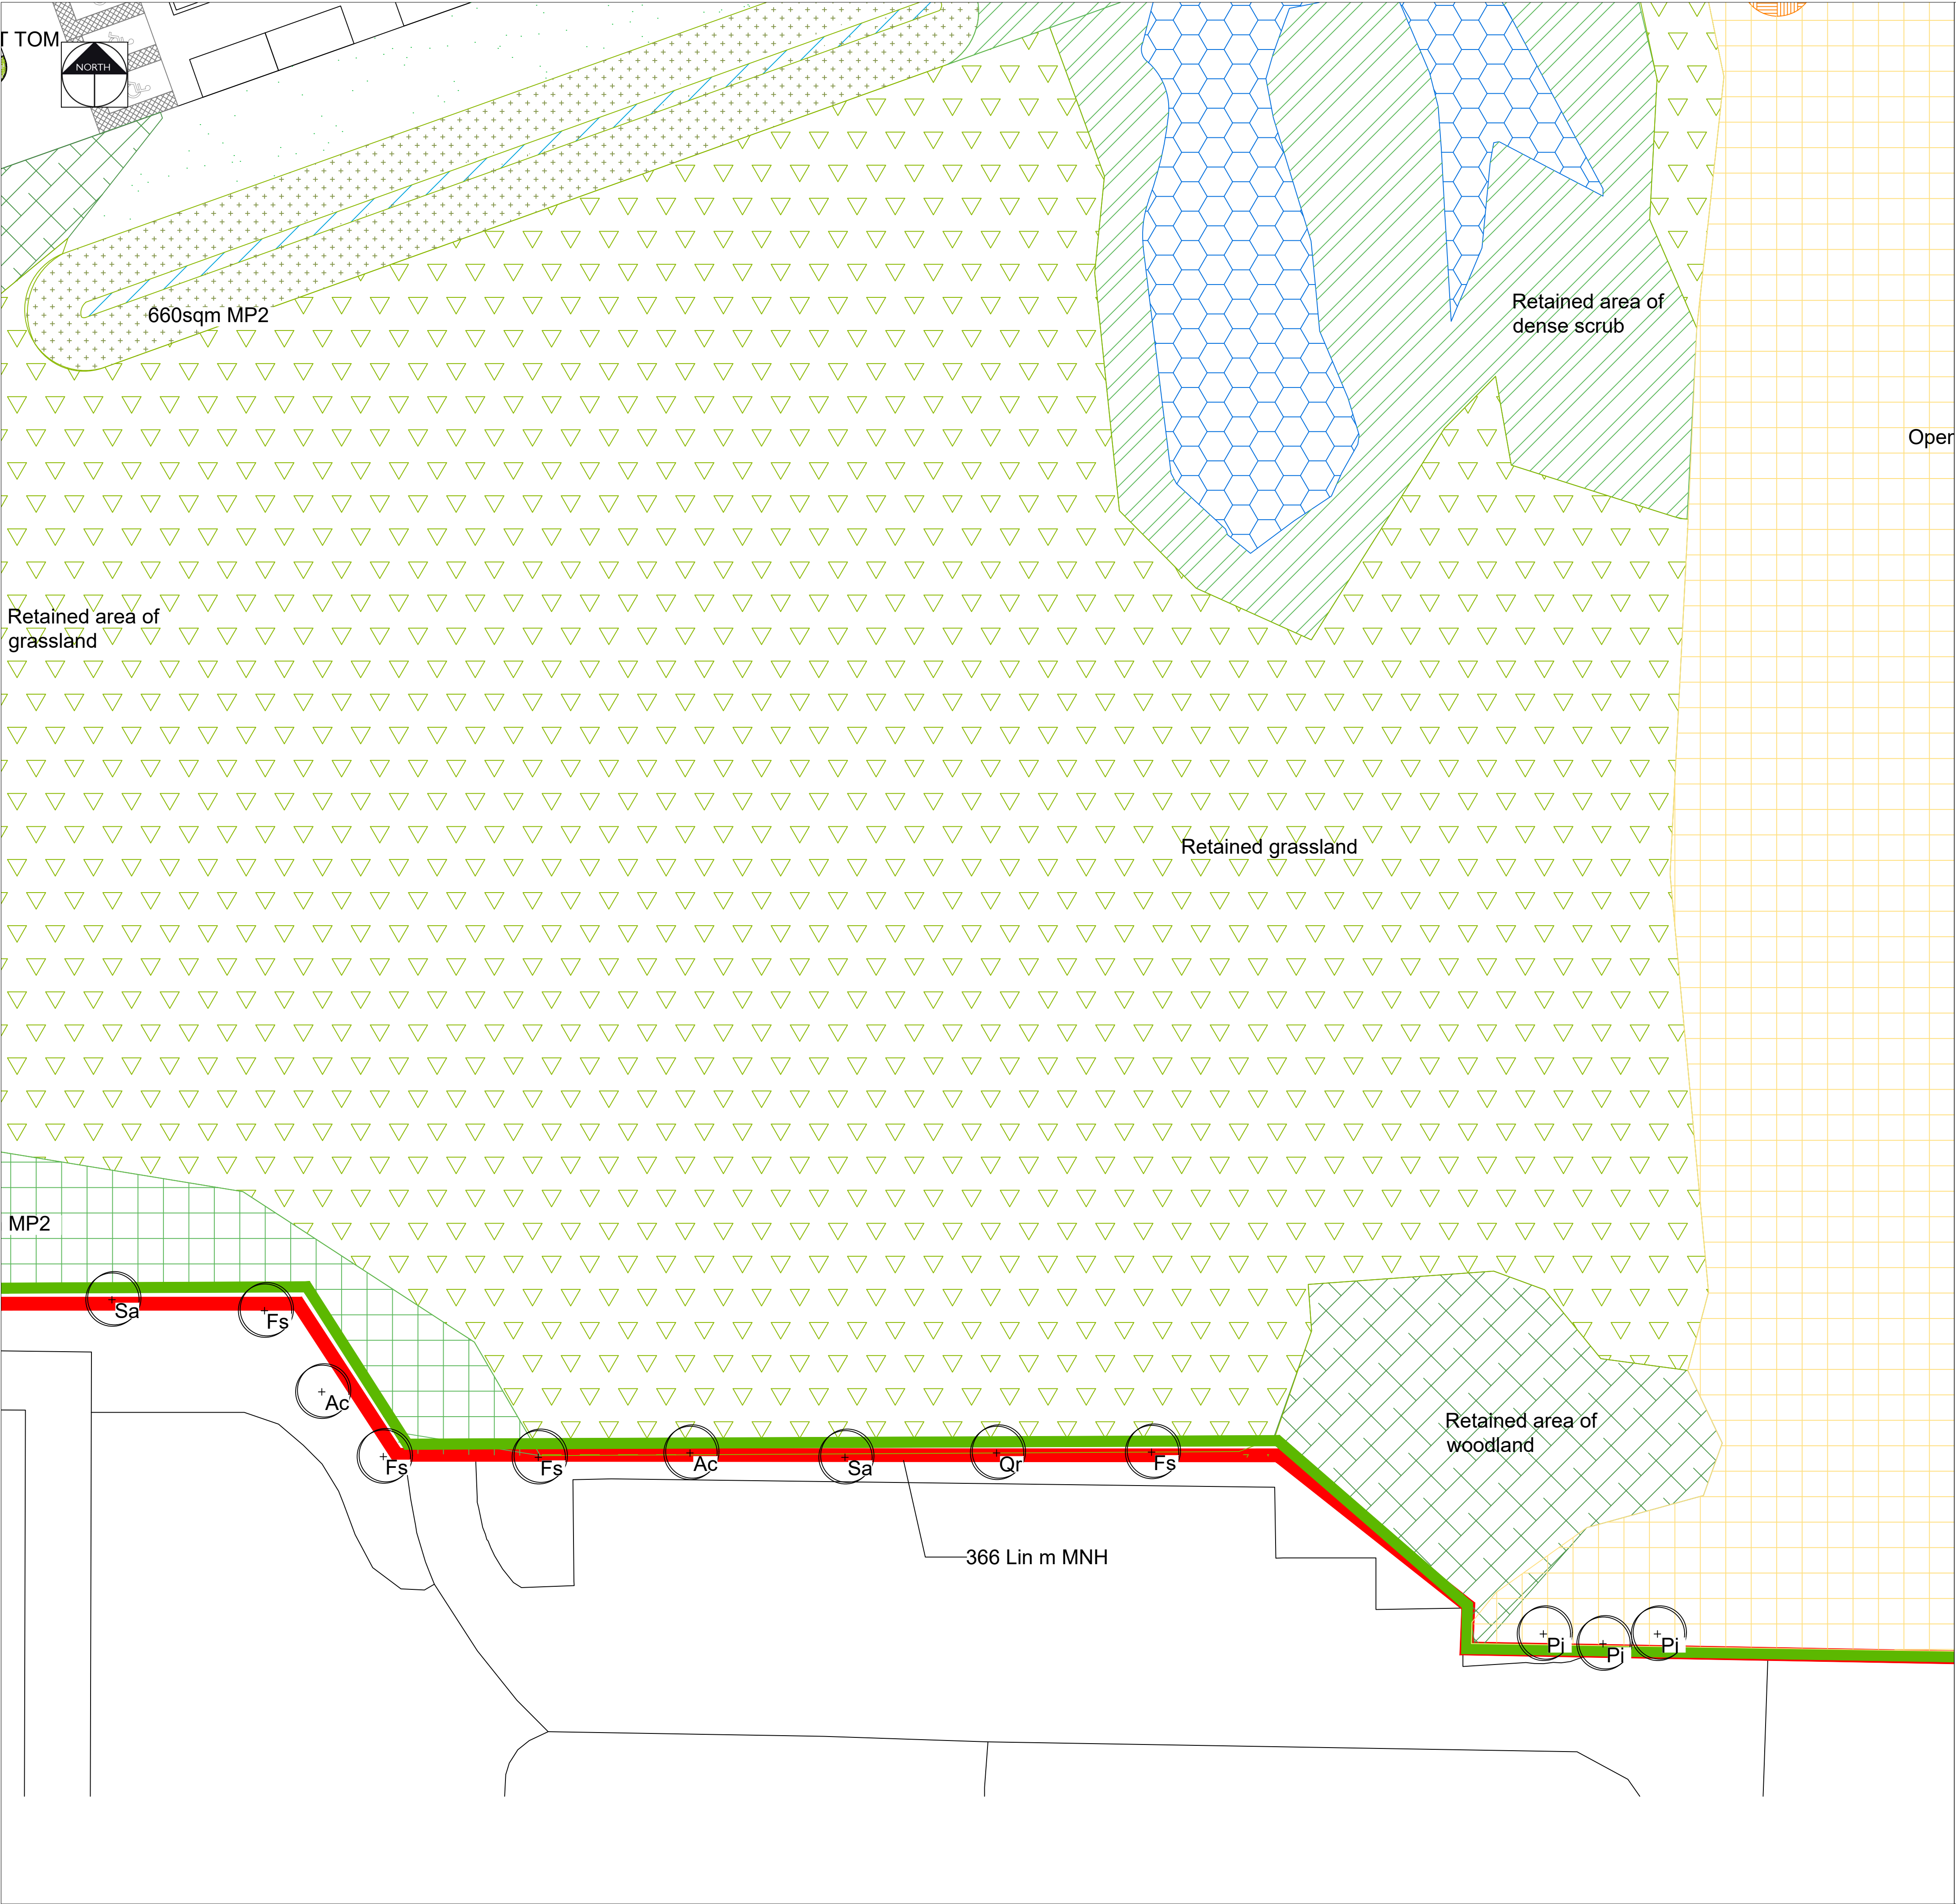

KEY	
	EXISTING VEGETATION - DENSE SCRUB <i>Please refer to the ecology report for details on species</i>
	EXISTING VEGETATION - WOODLAND <i>Please refer to the ecology report for details on species</i>
	EXISTING GRASSLAND <i>Areas of grassland to be retained. Please refer to the ecology report for details</i>
	EXISTING PONDS <i>Ponds to be retained</i>
	PROPOSED PONDS <i>Refer to Ecology Report for further details</i>
	MARSHY WET GRASSLAND <i>Refer to planting schedule for species and quantities and Ecology Report</i>
	WILDFLOWER GRASSLAND <i>Refer to planting schedule for details on species and quantities</i>
	TALL TUSSOCKY GRASSLAND <i>Refer to planting schedule for details on species and quantities</i>
	MIXED NATIVE HEDGEROW <i>Refer to planting schedule for details on species and quantities</i>
	BUTTERFLY / BEETLE WILDFLOWER MOUND <i>South facing mound planted in a wildflower mix. Refer to planting schedule for details on species and quantities</i>
	TREES <i>Refer to planting schedule for details on species and quantities</i>
	WET DITCH
	PATH <i>Maintained short grassland path</i>
	AMPHIBIAN AND REPTILE HIBERNACULA <i>Refer to Ecology Report for further information</i>
	LOG PILE
	MARGINAL PLANTING <i>Refer to planting schedule for details and quantities</i>
	DENSE SCRUB <i>Native whip planting. Refer to planting schedule for details and quantities</i>
	RETAINED DISTURBED AREAS <i>Areas of open mosaic disturbed ground with scattered scrub to remain as existing. Refer to UES Ecology Report for further details</i>
	OPEN MOSAIC GROUND <i>Areas of existing hardstanding / gravel to be broken up & allowed to naturally colonise with wildflower and scrub. Refer to UES Ecology Report for further details</i>
	SANDBANKS <i>Unvegetated sandbanks</i>
	AMPHIBIAN HIBERNACLA
	PROPOSED SHRUB BED <i>Please refer to the planting schedule for further details on species, quantities and nursery grades</i>

P4	27.03.23	Updated SuDS ponds	KLJ
P3	01.11.22	Revised to Architects layout + Drainage Strategy	KLJ
P2	14.09.22	Marginal planting to ponds	KLJ
P1	26.08.22	Initial Issue	KLJ
Rev	Date	Description	Initials
PGLA Ltd Landscape Architects Station Hop Offices 815 Stockport Road Manchester M19 3BS t: 0161 238 9138 e: info@pgla.co.uk w: www.pgla.co.uk			
Client FIREM			
Project 3A, KINGMOOR, WREXHAM			
Description PLANTING PLAN SHEET 13			
Status FOR PLANNING			
Scale 1:250@A1	Drawn KLJ	Checked PGG	Date OCT 2022
Job number WRE2206	Drawing number PP01.13	Revision P4	
Original size 100mm @ A1			

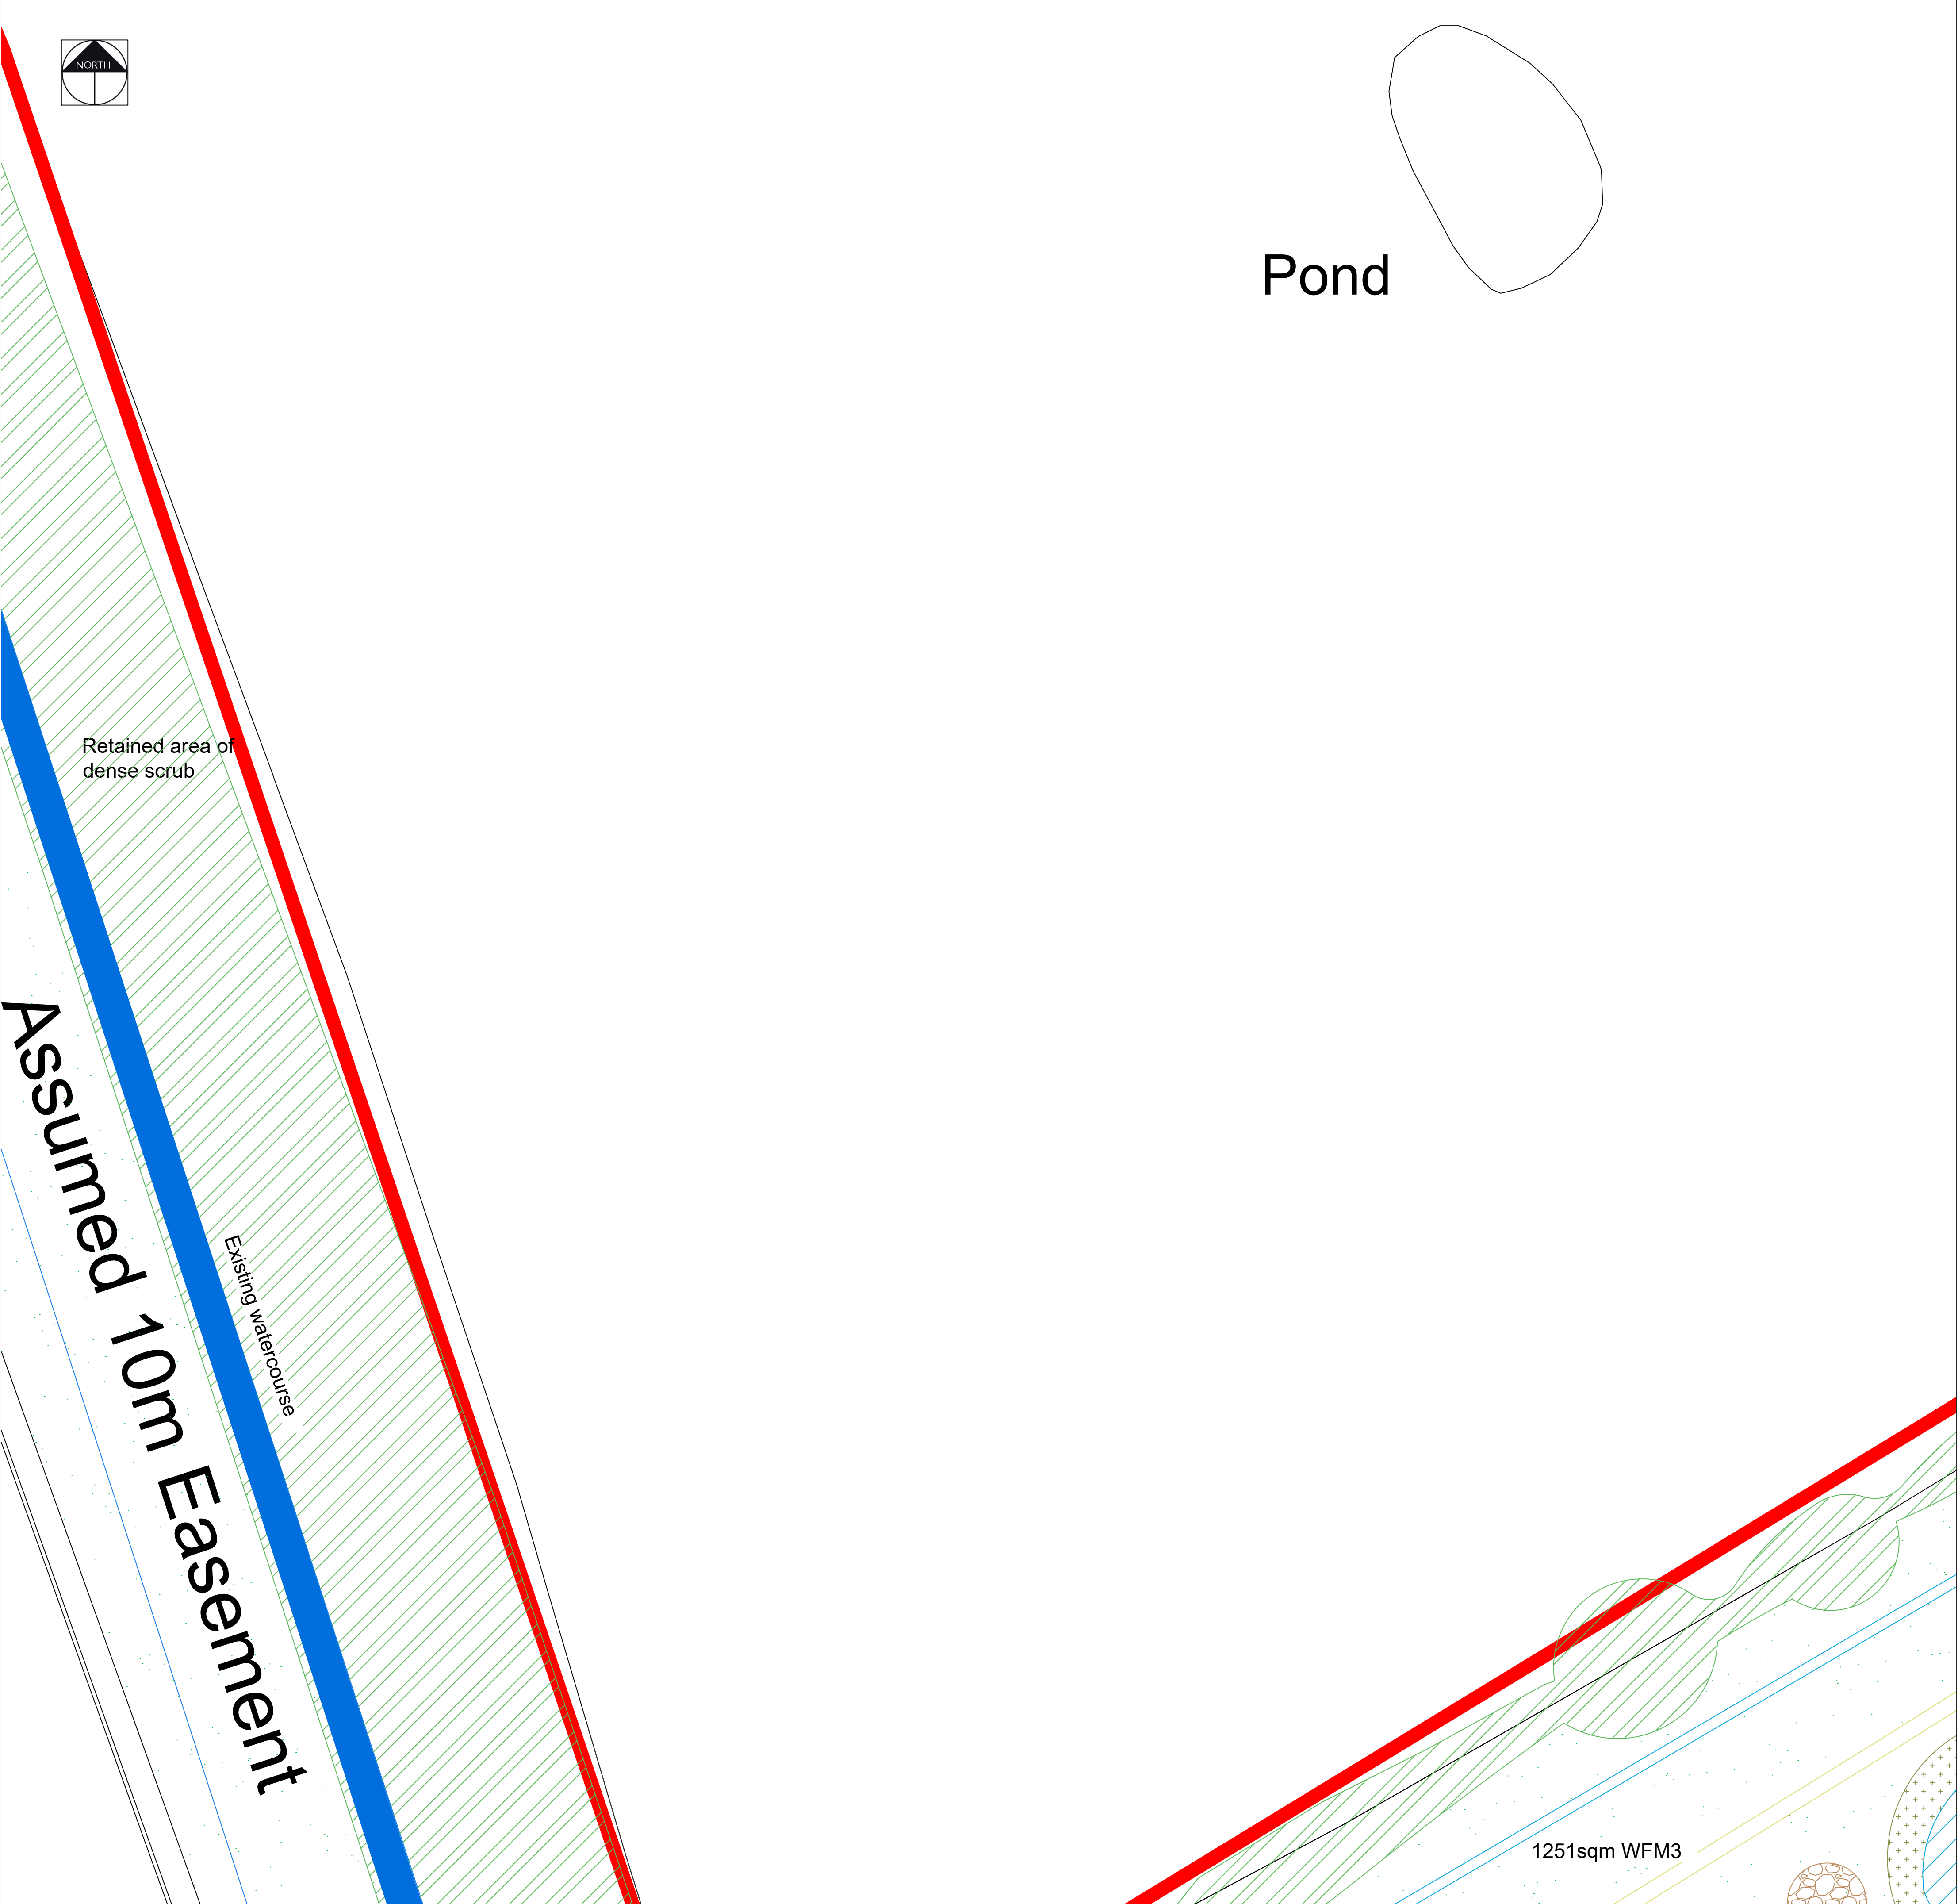

KEY

EXISTING VEGETATION - DENSE SCRUB

Please refer to the ecology report for details on species

EXISTING VEGETATION - WOODLAND

Please refer to the ecology report for details on species

EXISTING GRASSLAND

Areas of grassland to be retained. Please refer to the ecology report for details

EXISTING PONDS

Ponds to be retained

PROPOSED PONDS

Refer to Ecology Report for further details

MARSHY WET GRASSLAND

Refer to planting schedule for species and quantities and Ecology Report

WILDFLOWER GRASSLAND

Refer to planting schedule for details on species and quantities

TALL TUSSOCKY GRASSLAND

Refer to planting schedule for details on species and quantities

MIXED NATIVE HEDGEROW

Refer to planting schedule for details on species and quantities

BUTTERFLY / BEETLE WILDFLOWER MOUND

South facing mound planted in a wildflower mix. Refer to planting schedule for details on species and quantities

TREES

Refer to planting schedule for details on species and quantities

WET DITCH

PATH

Maintained short grassland path

AMPHIBIAN AND REPTILE HIBERNACULA

Refer to Ecology Report for further information

LOG PILE

MARGINAL PLANTING

Refer to planting schedule for details and quantities

DENSE SCRUB

Native whip planting. Refer to planting schedule for details and quantities

RETAINED DISTURBED AREAS

Areas of open mosaic disturbed ground with scattered scrub to remain as existing. Refer to UES Ecology Report for further details

OPEN MOSAIC GROUND

Areas of existing hardstanding / gravel to be broken up & allowed to naturally colonise with wildflower and scrub. Refer to UES Ecology Report for further details

SANDBANKS

Unvegetated sandbanks

AMPHIBIAN HIBERNACLA

PROPOSED SHRUB BED

Please refer to the planting schedule for further details on species, quantities and nursery grades

P4	27.03.23	Updated SuDS ponds	KLJ
P3	01.11.22	Revised to Architects layout + Drainage Strategy	KLJ
P2	14.09.22	Marginal planting to ponds	KLJ
P1	26.08.22	Initial Issue	KLJ
Rev	Date	Description	Initials

pgla

landscape architects

PGLA Ltd

Landscape Architects

Station Hop Offices

815 Stockport Road

Manchester

M19 3BS

t: 0161 238 9138

e: info@pgla.co.uk

w: www.pgla.co.uk

Client

FIREM

Project

3A, KINGMOOR, WREXHAM

Description

PLANTING PLAN

SHEET 14

Status

FOR PLANNING

Scale

1:250@A1

Drawn

KLJ

Checked

PGG

Date

OCT 2022

Job number

WRE2206


Drawing number

PP01.14

Revision

P4

Original size 100mm @ A1

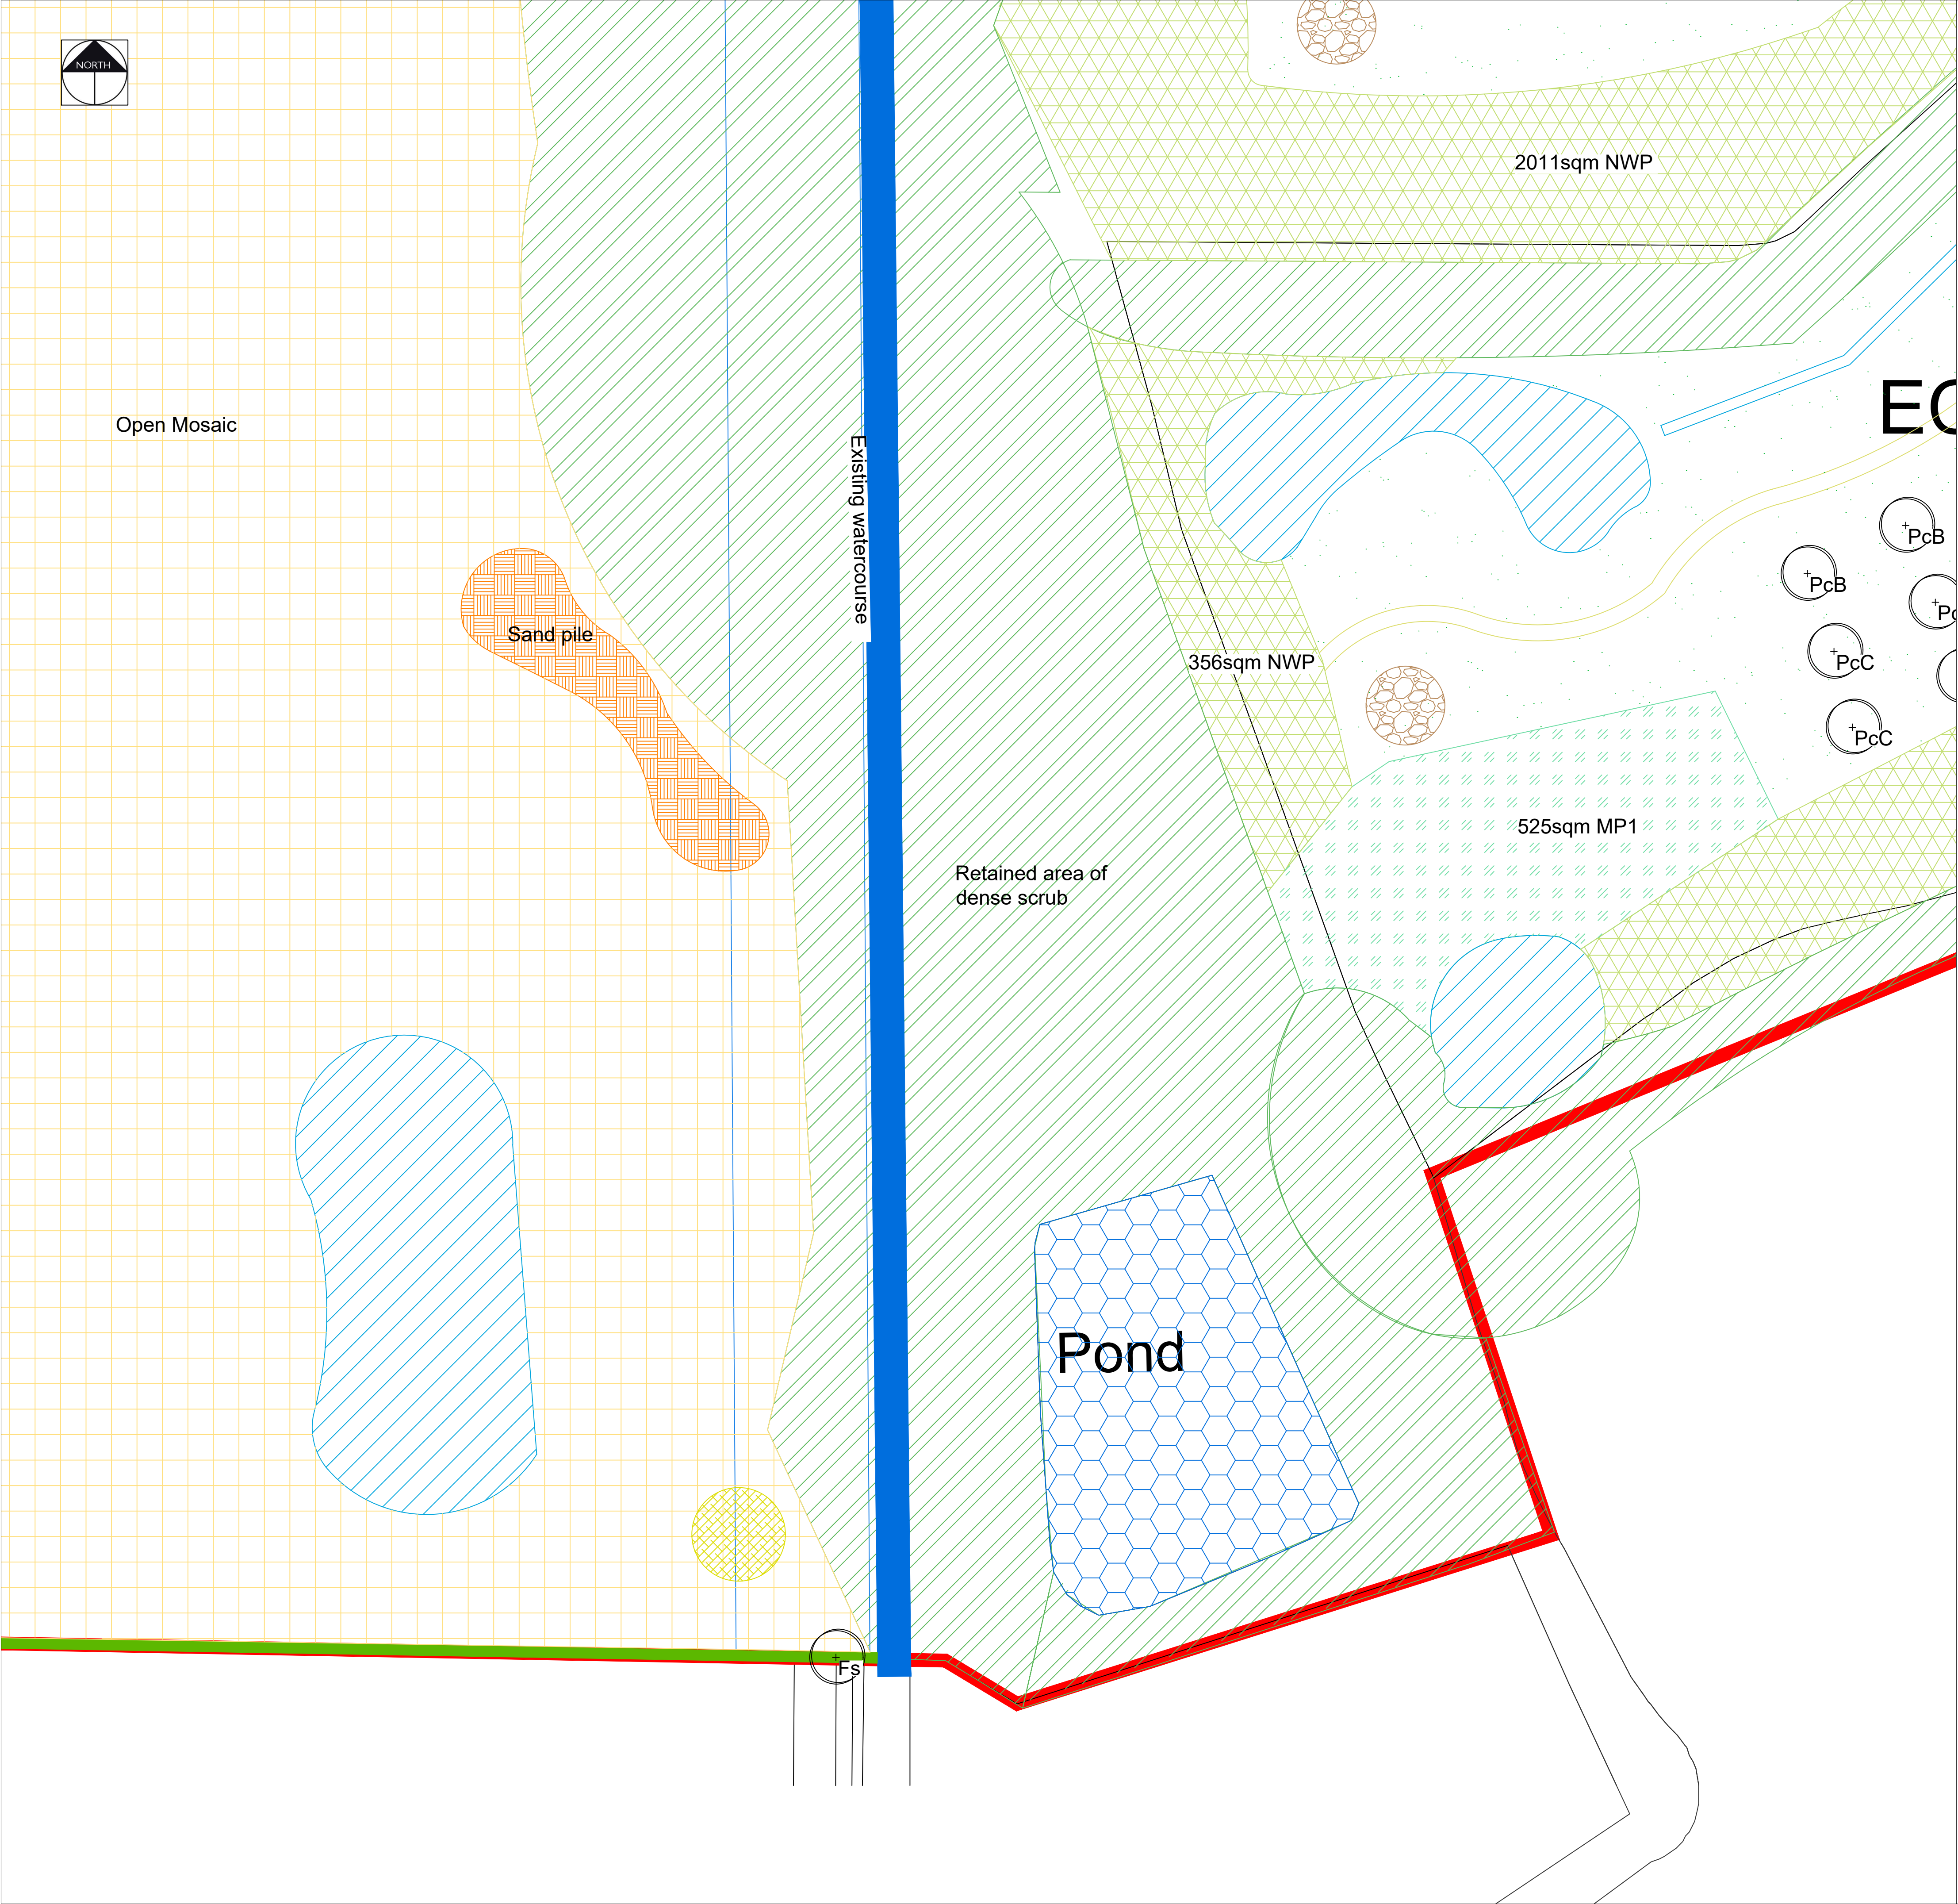

KEY

EXISTING VEGETATION - DENSE SCRUB
Please refer to the ecology report for details on species

EXISTING VEGETATION - WOODLAND
Please refer to the ecology report for details on species

EXISTING GRASSLAND
Areas of grassland to be retained. Please refer to the ecology report for details

EXISTING PONDS
Ponds to be retained

PROPOSED PONDS
Refer to Ecology Report for further details

MARSHY WET GRASSLAND
Refer to planting schedule for species and quantities and Ecology Report

WILDFLOWER GRASSLAND
Refer to planting schedule for details on species and quantities

TALL TUSSOCKY GRASSLAND
Refer to planting schedule for details on species and quantities

MIXED NATIVE HEDGEROW
Refer to planting schedule for details on species and quantities

BUTTERFLY / BEETLE WILDFLOWER MOUND
South facing mound planted in a wildflower mix. Refer to planting schedule for details on species and quantities

TREES
Refer to planting schedule for details on species and quantities

WET DITCH

PATH
Maintained short grassland path

AMPHIBIAN AND REPTILE HIBERNACULA
Refer to Ecology Report for further information

LOG PILE

MARGINAL PLANTING
Refer to planting schedule for details and quantities

DENSE SCRUB
Native whip planting. Refer to planting schedule for details and quantities

RETAINED DISTURBED AREAS
Areas of open mosaic disturbed ground with scattered scrub to remain as existing. Refer to UES Ecology Report for further details

OPEN MOSAIC GROUND
Areas of existing hardstanding / gravel to be broken up & allowed to naturally colonise with wildflower and scrub. Refer to UES Ecology Report for further details

SANDBANKS
Unvegetated sandbanks

AMPHIBIAN HIBERNACLA

PROPOSED SHRUB BED
Please refer to the planting schedule for further details on species, quantities and nursery grades

P4	27.03.23	Updated SuDS ponds	KLJ
P3	01.11.22	Revised to Architects layout + Drainage Strategy	KLJ
P2	14.09.22	Marginal planting to ponds	KLJ
P1	26.08.22	Initial Issue	KLJ
Rev	Date	Description	Initials

PGLA Ltd
Landscape Architects
Station Hop Offices
815 Stockport Road
Manchester
M19 3BS

t: 0161 238 9138
e: info@pgla.co.uk
w: www.pgla.co.uk

Client

FIREM

Project

3A, KINGMOOR, WREXHAM

Description

PLANTING PLAN

SHEET 16

Status

FOR PLANNING

Scale

1:250@A1

Drawn

KLJ

Checked

PGG

Date

OCT 2022

Job number

WRE2206


Drawing number

PP01.16

Revision

P4

Original size 100mm @ A1

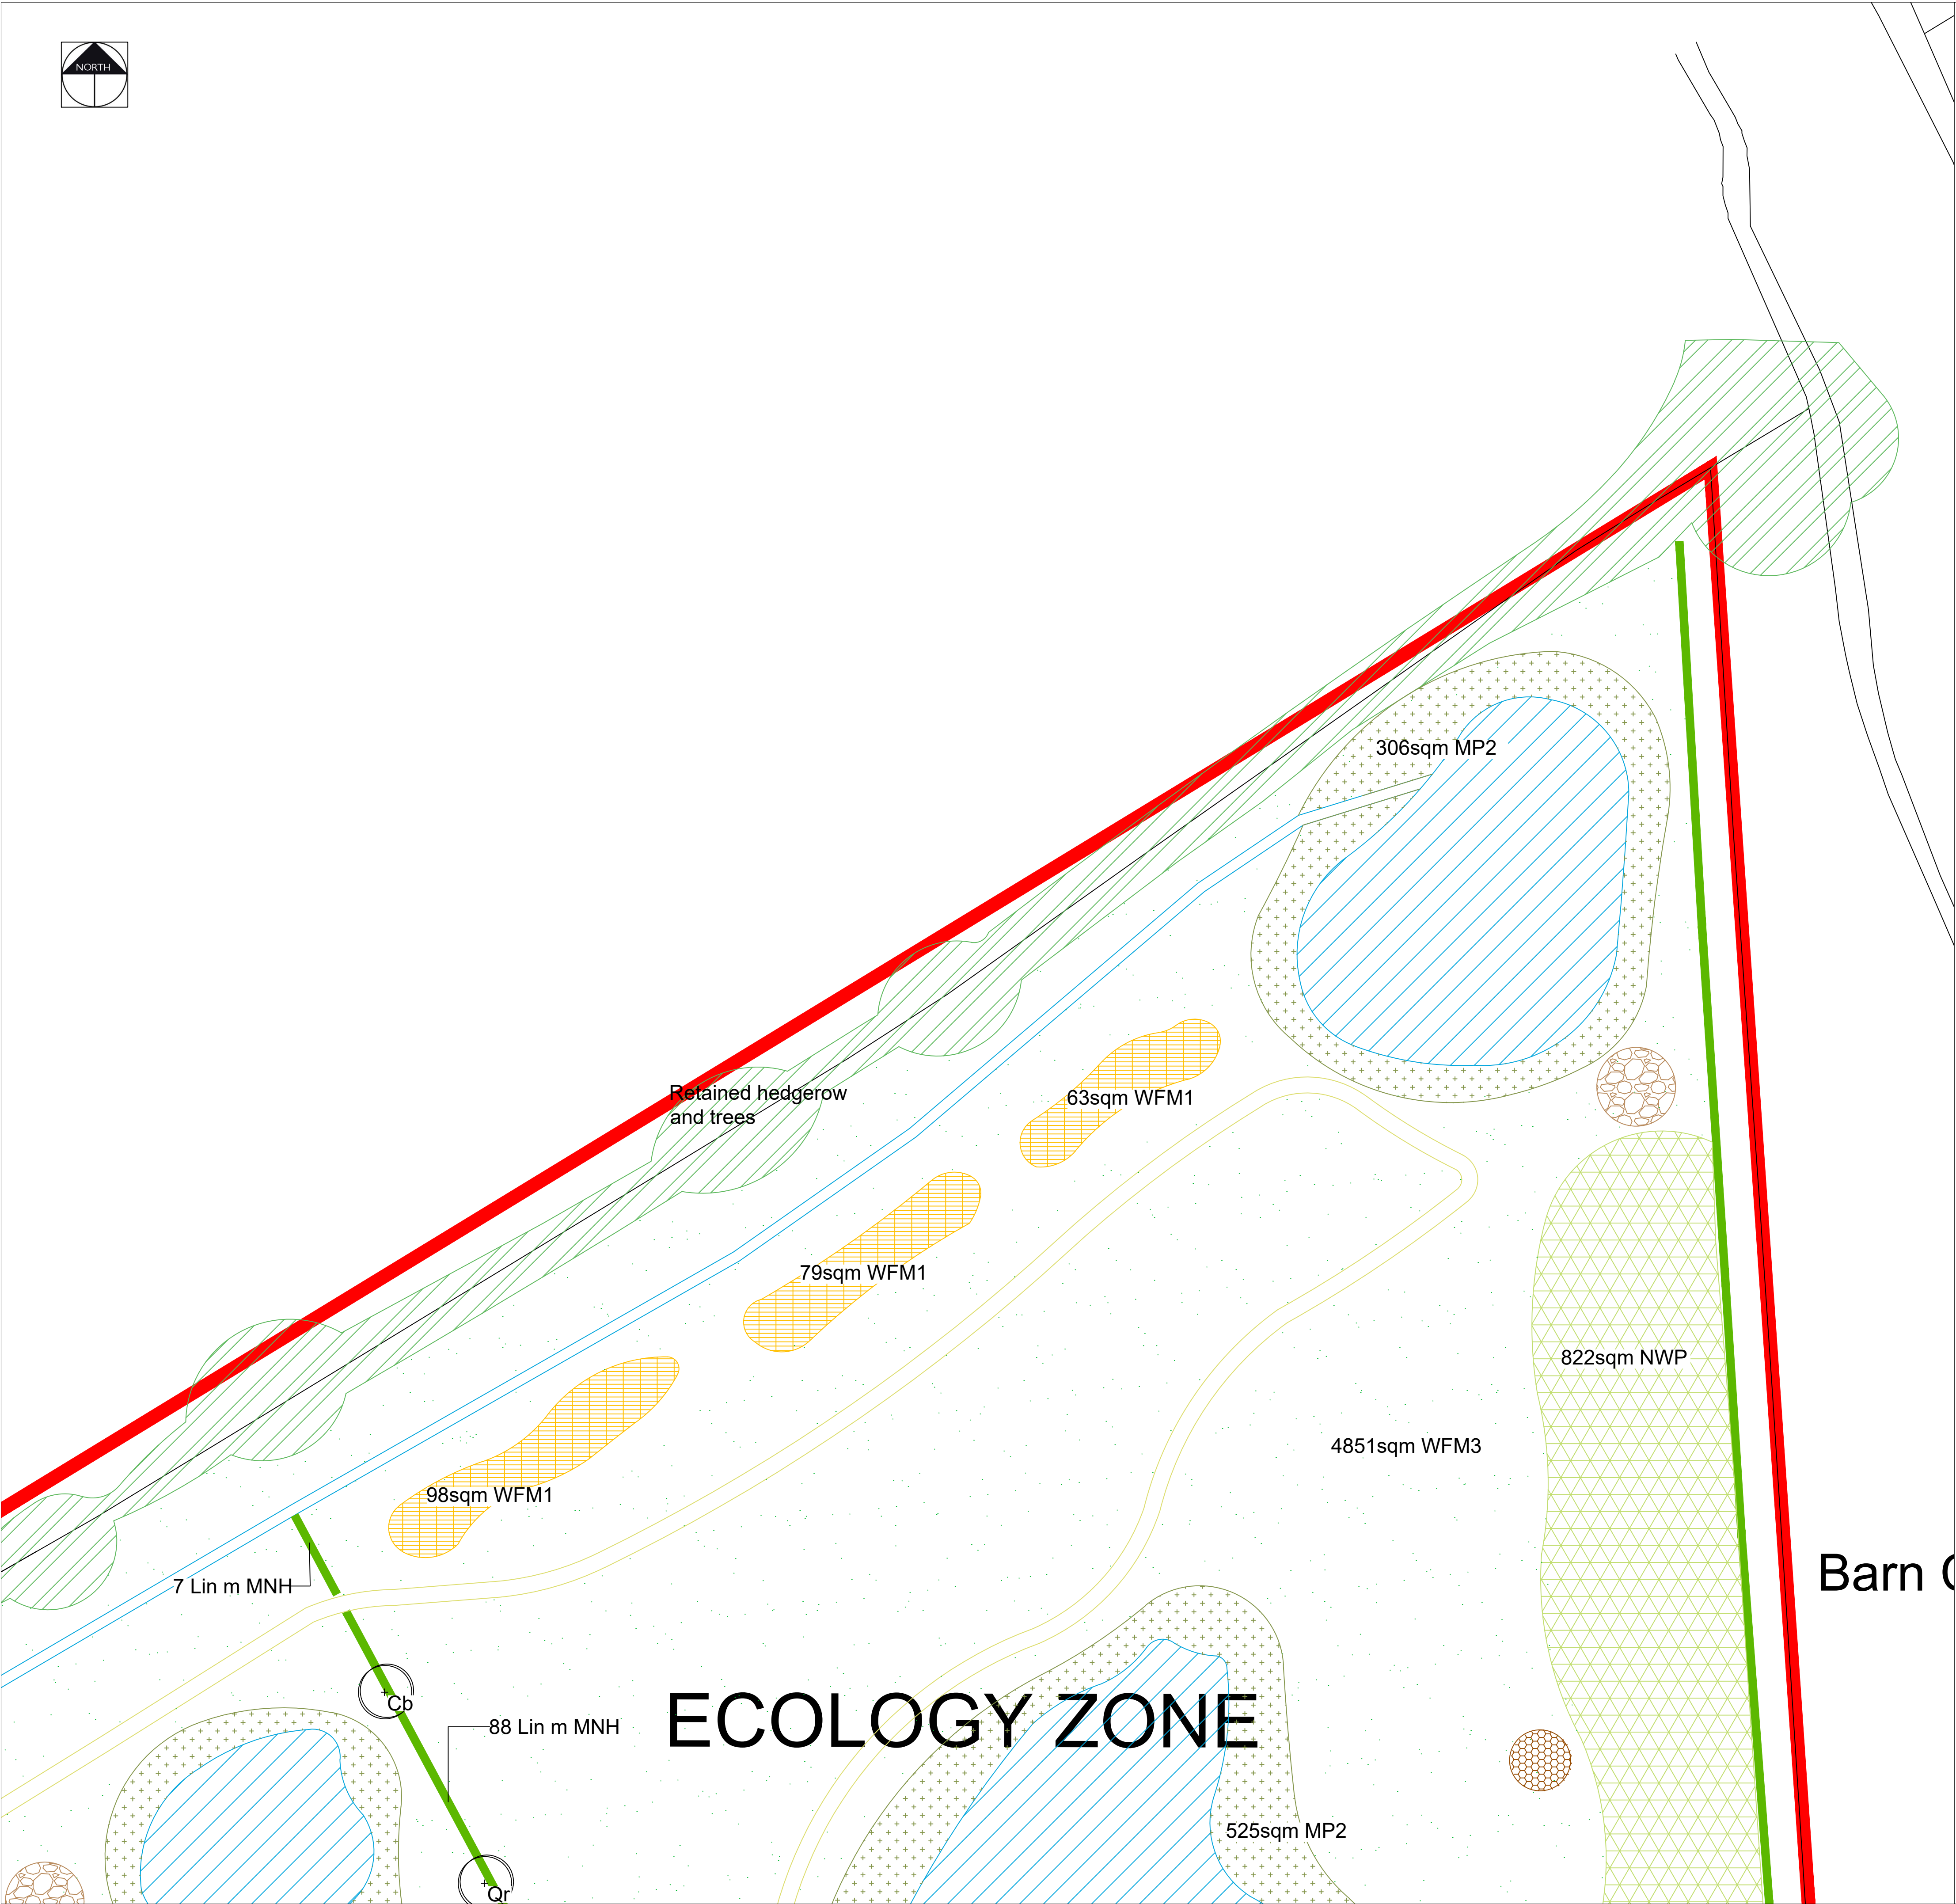

KEY			
	EXISTING VEGETATION - DENSE SCRUB	Please refer to the ecology report for details on species	
	EXISTING VEGETATION - WOODLAND	Please refer to the ecology report for details on species	
	EXISTING GRASSLAND	Areas of grassland to be retained. Please refer to the ecology report for details	
	EXISTING PONDS	Ponds to be retained	
	PROPOSED PONDS	Refer to Ecology Report for further details	
	MARSHY WET GRASSLAND	Refer to planting schedule for species and quantities and Ecology Report	
	WILDFLOWER GRASSLAND	Refer to planting schedule for details on species and quantities	
	TALL TUSsocky GRASSLAND	Refer to planting schedule for details on species and quantities	
	MIXED NATIVE HEDGEROW	Refer to planting schedule for details on species and quantities	
	BUTTERFLY / BEETLE WILDFLOWER MOUND	South facing mound planted in a wildflower mix. Refer to planting schedule for details on species and quantities	
	TREES	Refer to planting schedule for details on species and quantities	
	WET DITCH		
	PATH	Maintained short grassland path	
	AMPHIBIAN AND REPTILE HIBERNACULA	Refer to Ecology Report for further information	
	LOG PILE		
	MARGINAL PLANTING	Refer to planting schedule for details and quantities	
	DENSE SCRUB	Native whip planting. Refer to planting schedule for details and quantities	
	RETAINED DISTURBED AREAS	Areas of open mosaic disturbed ground with scattered scrub to remain as existing. Refer to UES Ecology Report for further details	
	OPEN MOSAIC GROUND	Areas of existing hardstanding / gravel to be broken up & allowed to naturally colonise with wildflower and scrub. Refer to UES Ecology Report for further details	
	SANDBANKS	Unvegetated sandbanks	
	AMPHIBIAN HIBERNACLA		
	PROPOSED SHRUB BED	Please refer to the planting schedule for further details on species, quantities and nursery grades	

P4	27.03.23	Updated SuDS ponds	KLJ
P3	01.11.22	Revised to Architects layout + Drainage Strategy	KLJ
P2	14.09.22	Marginal planting to ponds	KLJ
P1	26.08.22	Initial Issue	KLJ
Rev	Date	Description	Initials

PGLA Ltd
Landscape Architects
Station Hop Offices
815 Stockport Road
Manchester
M19 3BS

t: 0161 238 9138
e: info@pgla.co.uk
w: www.pgla.co.uk

Client
FIREM


Project
3A, KINGMOOR, WREXHAM

Description
PLANTING PLAN
SHEET 17

Status
FOR PLANNING

Scale 1:250@A1	Drawn KLJ	Checked PGG	Date OCT 2022
Job number WRE2206	Drawing number PP01.17	Revision P4	

Original size 100mm @ A1

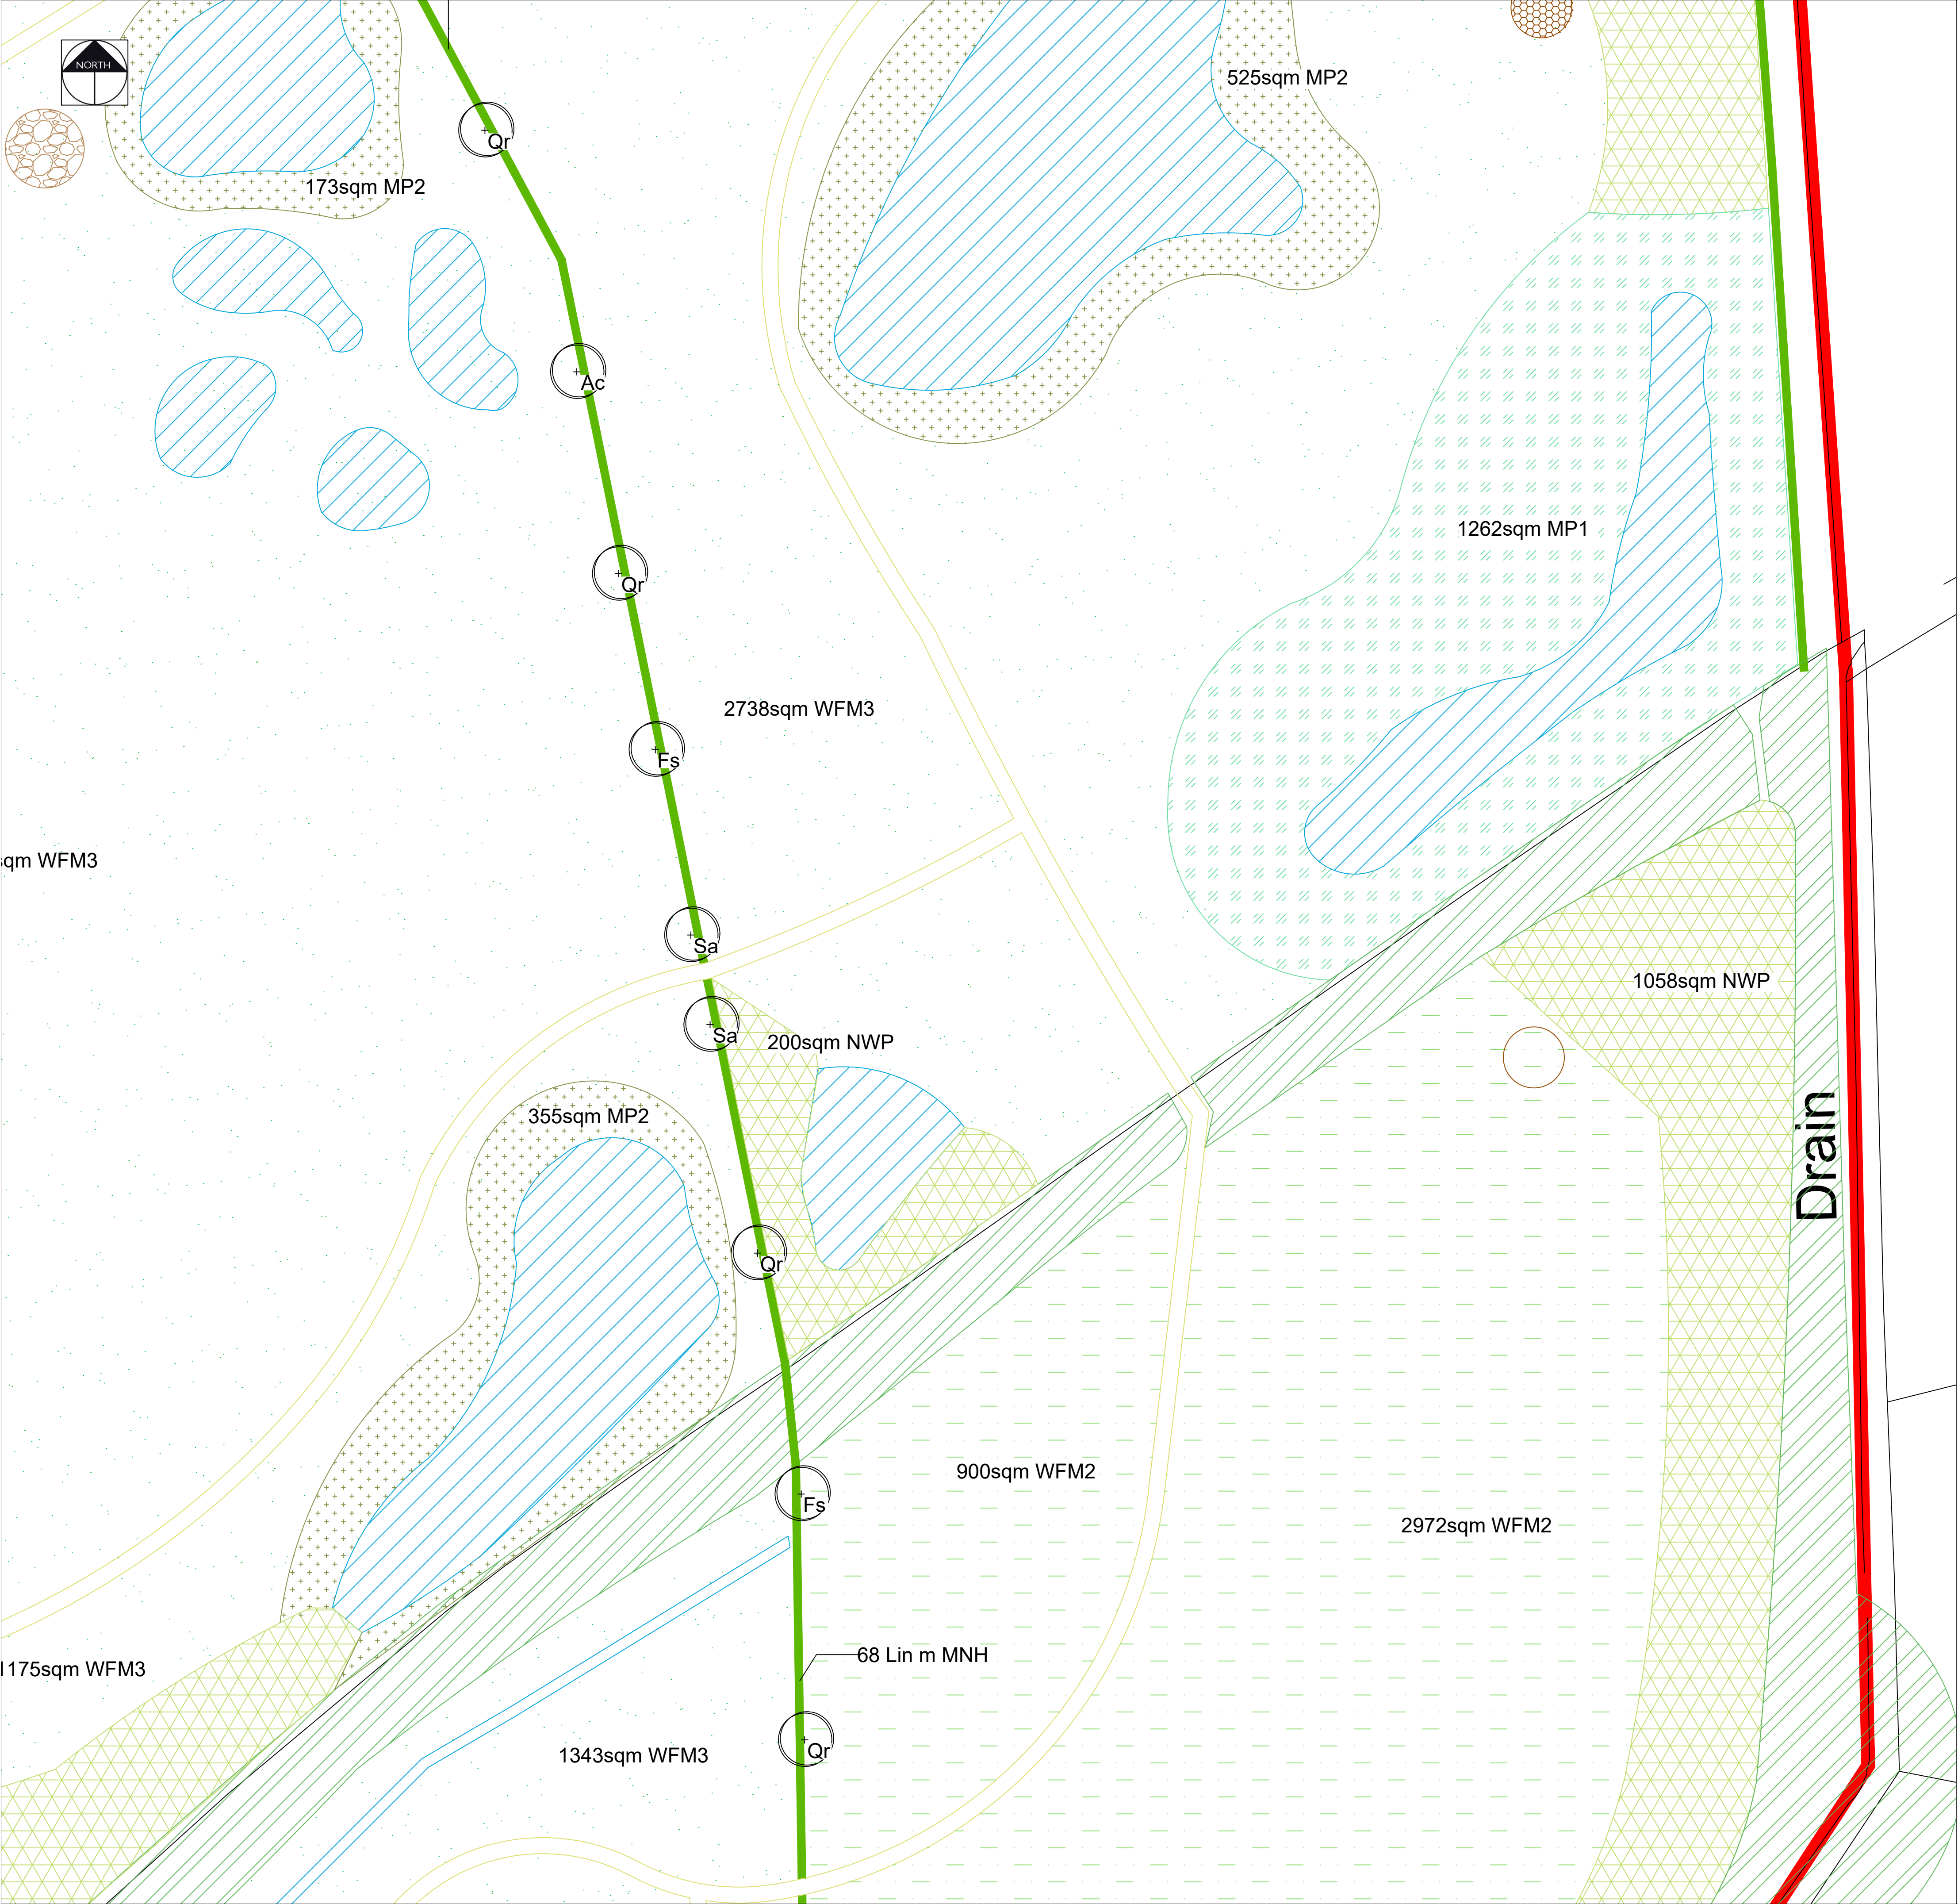

KEY

EXISTING VEGETATION - DENSE SCRUB
Please refer to the ecology report for details on species

EXISTING VEGETATION - WOODLAND
Please refer to the ecology report for details on species

EXISTING GRASSLAND
Areas of grassland to be retained. Please refer to the ecology report for details

EXISTING PONDS
Ponds to be retained

PROPOSED PONDS
Refer to Ecology Report for further details

MARSHY WET GRASSLAND
Refer to planting schedule for species and quantities and Ecology Report

WILDFLOWER GRASSLAND
Refer to planting schedule for details on species and quantities

TALL TUSsocky GRASSLAND
Refer to planting schedule for details on species and quantities

MIXED NATIVE HEDGEROW
Refer to planting schedule for details on species and quantities

BUTTERFLY / BEETLE WILDFLOWER MOUND
South facing mound planted in a wildflower mix. Refer to planting schedule for details on species and quantities

TREES
Refer to planting schedule for details on species and quantities

WET DITCH

PATH
Maintained short grassland path

AMPHIBIAN AND REPTILE HIBERNACULA
Refer to Ecology Report for further information

LOG PILE

MARGINAL PLANTING
Refer to planting schedule for details and quantities

DENSE SCRUB
Native whip planting. Refer to planting schedule for details and quantities

RETAINED DISTURBED AREAS
Areas of open mosaic disturbed ground with scattered scrub to remain as existing. Refer to UES Ecology Report for further details

OPEN MOSAIC GROUND
Areas of existing hardstanding / gravel to be broken up & allowed to naturally colonise with wildflower and scrub. Refer to UES Ecology Report for further details

SANDBANKS
Unvegetated sandbanks

AMPHIBIAN HIBERNACULA

PROPOSED SHRUB BED
Please refer to the planting schedule for further details on species, quantities and nursery grades

P4	27.03.23	Updated SuDS ponds	KLJ
P3	01.11.22	Revised to Architects layout + Drainage Strategy	KLJ
P2	14.09.22	Marginal planting to ponds	KLJ
P1	26.08.22	Initial Issue	KLJ

Rev	Date	Description	Initials

PGLA Ltd
Landscape Architects
Station Hop Offices
815 Stockport Road
Manchester
M19 3BS

t: 0161 238 9138
e: info@pgla.co.uk
w: www.pgla.co.uk

Client

FIREM

Project

3A, KINGMOOR, WREXHAM

Description

PLANTING PLAN

SHEET 18

Status

FOR PLANNING

Scale

1:250@A1

Drawn

KLJ

Checked

PGG

Date

OCT 2022

Job number

WRE2206


Drawing number

PP01.18

Revision

P4

Original size 100mm @ A1

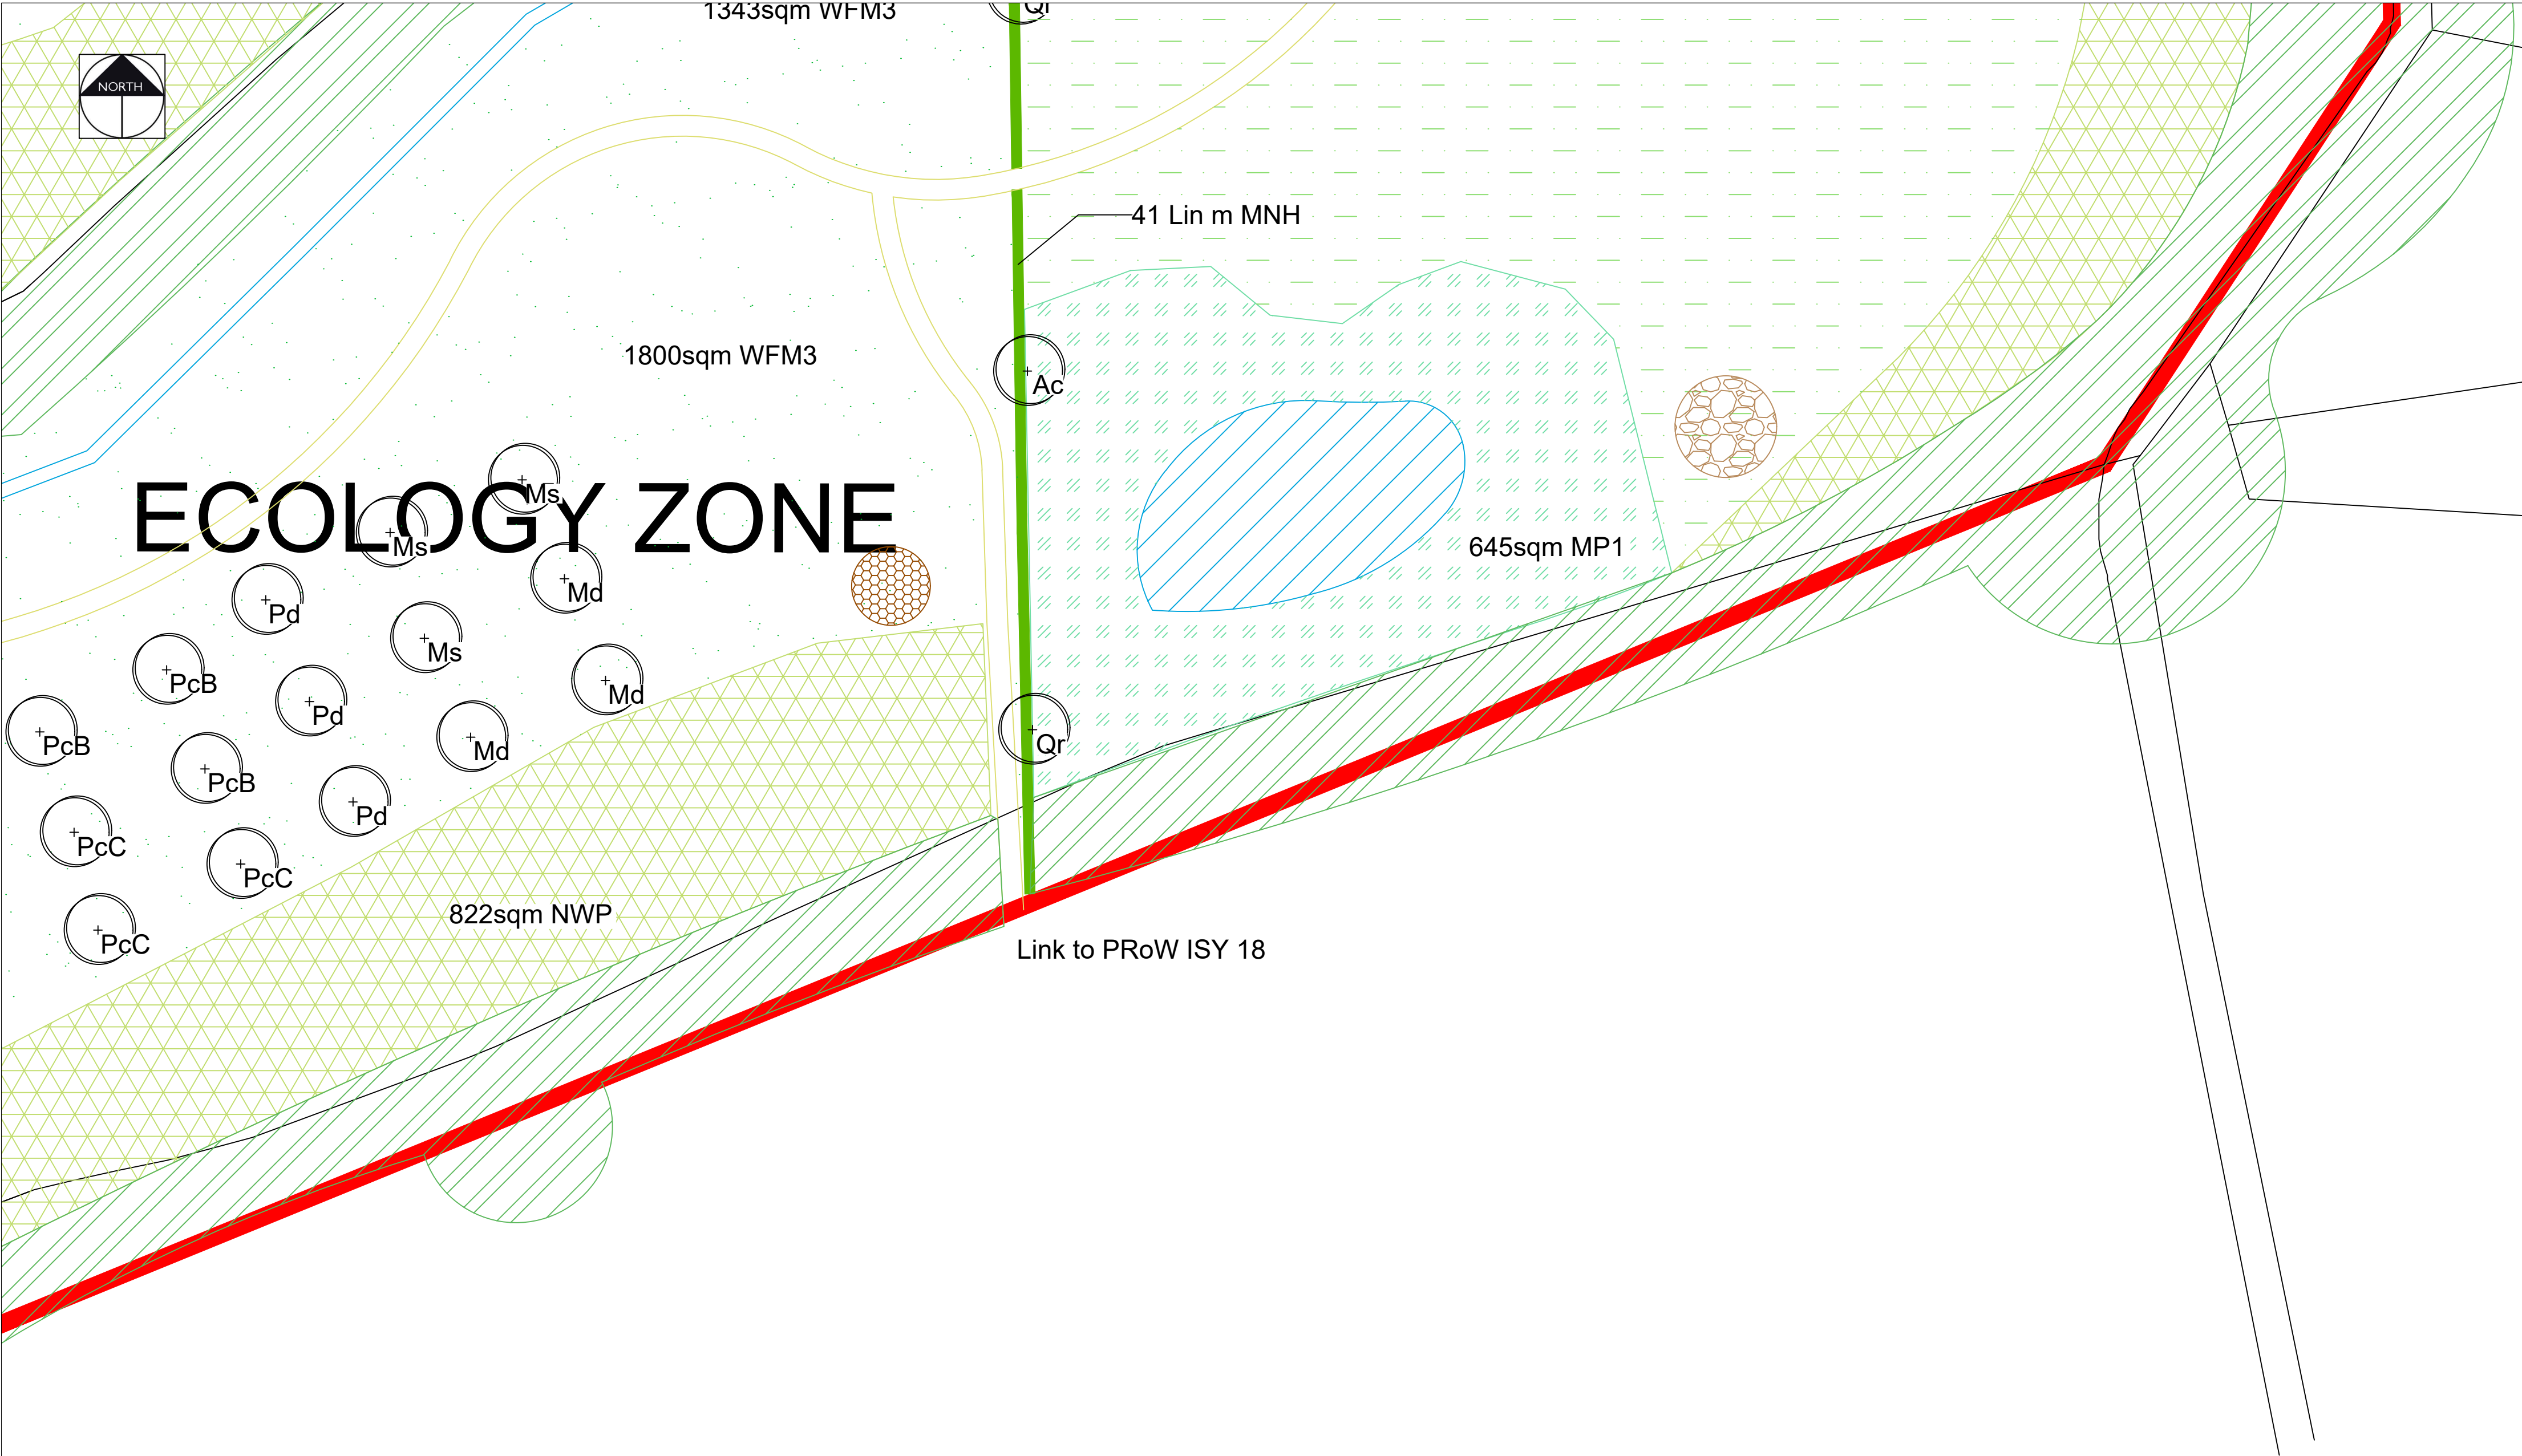

KEY

EXISTING VEGETATION - DENSE SCRUB
Please refer to the ecology report for details on species

EXISTING VEGETATION - WOODLAND
Please refer to the ecology report for details on species

EXISTING GRASSLAND
Areas of grassland to be retained. Please refer to the ecology report for details

EXISTING PONDS
Ponds to be retained

PROPOSED PONDS
Refer to Ecology Report for further details

MARSHY WET GRASSLAND
Refer to planting schedule for species and quantities and Ecology Report

WILDFLOWER GRASSLAND
Refer to planting schedule for details on species and quantities

TALL TUSSOCKY GRASSLAND
Refer to planting schedule for details on species and quantities

MIXED NATIVE HEDGEROW
Refer to planting schedule for details on species and quantities

BUTTERFLY / BEETLE WILDFLOWER MOUND
South facing mound planted in a wildflower mix. Refer to planting schedule for details on species and quantities

TREES
Refer to planting schedule for details on species and quantities

WET DITCH

PATH
Maintained short grassland path

AMPHIBIAN AND REPTILE HIBERNACULA
Refer to Ecology Report for further information

LOG PILE

MARGINAL PLANTING
Refer to planting schedule for details and quantities

DENSE SCRUB
Native whip planting. Refer to planting schedule for details and quantities

RETAINED DISTURBED AREAS
Areas of open mosaic disturbed ground with scattered scrub to remain as existing. Refer to UES Ecology Report for further details

OPEN MOSAIC GROUND
Areas of existing hardstanding / gravel to be broken up & allowed to naturally colonise with wildflower and scrub. Refer to UES Ecology Report for further details

SANDBANKS
Unvegetated sandbanks

AMPHIBIAN HIBERNACLA

PROPOSED SHRUB BED
Please refer to the planting schedule for further details on species, quantities and nursery grades

P4	27.03.23	Updated SuDS ponds	KLJ
P3	01.11.22	Revised to Architects layout + Drainage Strategy	KLJ
P2	14.09.22	Marginal planting to ponds	KLJ
P1	26.08.22	Initial Issue	KLJ
Rev	Date	Description	Initials

landscape architects

PGLA Ltd
Landscape Architects
Station Hop Offices
815 Stockport Road
Manchester
M19 3BS

t: 0161 238 9138
e: info@pgla.co.uk
w: www.pgla.co.uk

Client

FIREM

Project

3A, KINGMOOR, WREXHAM

Description

PLANTING PLAN

SHEET 19

Status

FOR PLANNING

Scale	Drawn	Checked	Date
1:250@A1	KLJ	PGG	OCT 2022
Job number	Drawing number	Revision	
WRE2206	PP01.19	P4	

Original size 100mm @ A1