



Root Protection Area (RPA) Notes

BS5837:2012 standard circular RPAs are illustrated here, with consideration required for anticipated root growth influence and restrictions, such as –

Root growth from trees generally may be absent restricted or deflected from site due to the lower/higher level changes, raised concrete structures, existing foundations, hard surfaces, longstanding compacted ground and existing structures for example. Further investigation may be required to establish the presence or absence of roots.

KEY

Tree Crown Spread

Root Protection Area (RPA)

Tree Stem

T1 Tree No.

Removed Tree

Tree Condition Category


A

B

C

U

The surveyed trees are illustrated on this Constraints Plan which is prepared in accordance with British Standard BS5837: 2012 'Trees in Relation to Design, Demolition and Construction – Recommendations'

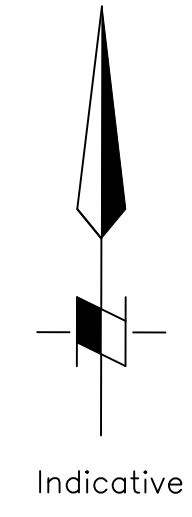

DO NOT SCALE FROM
DRAWING

The original of this drawing was produced in colour – a monochrome copy should not be relied upon.

REV.	DESCRIPTION				DWN	CHK'D	DATE
CLIENT							
QEwC Ltd							
PROJECT							
20102_21/A1 Bersham Hall, Bertram Road, Wrexham, LL14 4HS							
TITLE							
Tree Constraints Plan							
DWN	DATE	CHK'D	DATE	APP'D	DATE	SCALE	
RPHB	11/11/2021	AT	11/11/2021			1-200	
Indigo^{Ltd} S u r v e y s (Mail) Second Floor, 1 Hunter's Walk, Canal Street, Chester. CH1 4EB Telephone: 0333 123 7080 www.indigosurveys.co.uk							
Drawing Number						A1	
20102_21/A1/TCP/01						REV.	

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE REPRODUCED WITHOUT THE CONSENT OF INDIGO SURVEYS LTD.