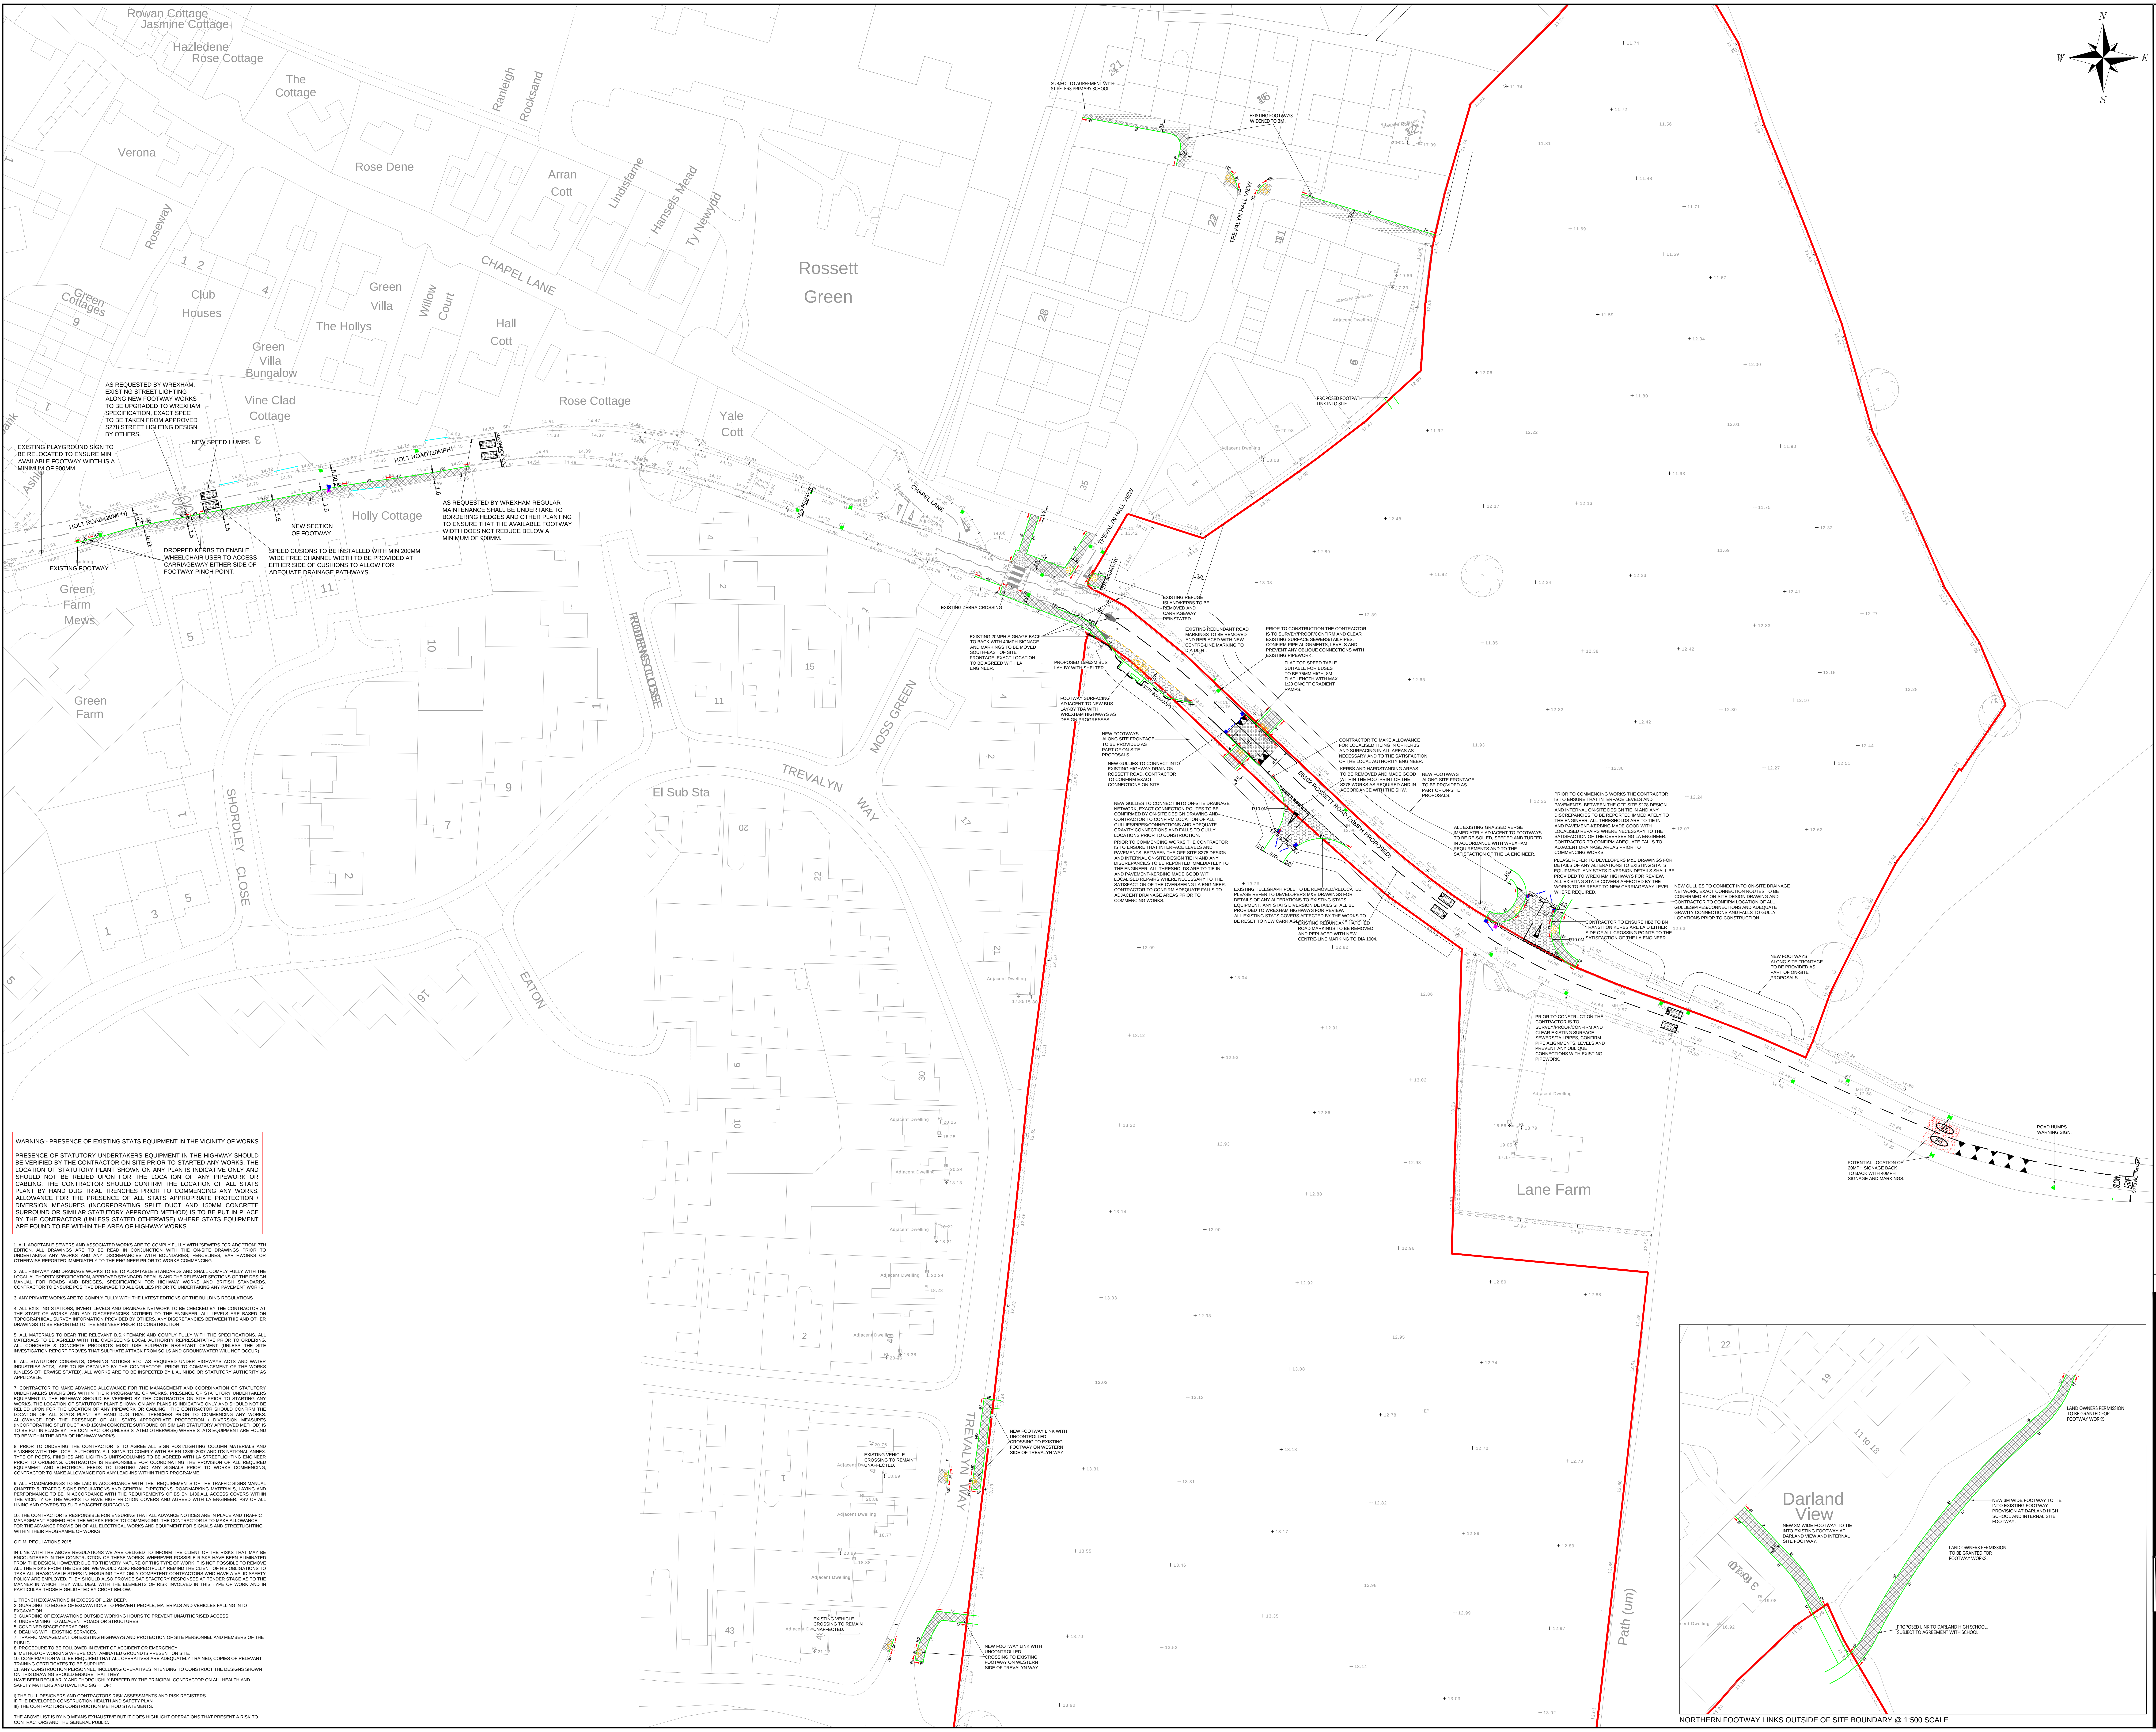
Rossett Green
HOLT ROAD (20MPH)
CHAPEL LANE
TREVALYN HALL VIEW
B5102 ROSSETT ROAD (20MPH PROPOSED)
TREVALYN WAY
MOSS GREEN
SHORDLEY CLOSE
EATON
Lane Farm
El Sub Sta
Holly Cottage
Green Farm Mews
Green Farm
Darland View
Path (um)
S278 BOUNDARY
SLOW
ARAF
AS REQUESTED BY WREXHAM, EXISTING STREET LIGHTING ALONG NEW FOOTWAY WORKS TO BE UPGRADED TO WREXHAM SPECIFICATION, EXACT SPEC TO BE TAKEN FROM APPROVED S278 STREET LIGHTING DESIGN BY OTHERS.
EXISTING PLAYGROUND SIGN TO BE RELOCATED TO ENSURE MIN AVAILABLE FOOTWAY WIDTH IS A MINIMUM OF 900MM.
NEW SPEED HUMPS
EXISTING FOOTWAY
DROPPED KERBS TO ENABLE WHEELCHAIR USER TO ACCESS CARRIAGEWAY EITHER SIDE OF FOOTWAY PINCH POINT.
SPEED CUSIONS TO BE INSTALLED WITH MIN 200MM WIDE FREE CHANNEL WIDTH TO BE PROVIDED AT EITHER SIDE OF CUSHIONS TO ALLOW FOR ADEQUATE DRAINAGE PATHWAYS.
NEW SECTION OF FOOTWAY.
AS REQUESTED BY WREXHAM REGULAR MAINTENANCE SHALL BE UNDERTAKE TO BORDERING HEDGES AND OTHER PLANTING TO ENSURE THAT THE AVAILABLE FOOTWAY WIDTH DOES NOT REDUCE BELOW A MINIMUM OF 900MM.
SUBJECT TO AGREEMENT WITH ST PETERS PRIMARY SCHOOL.
EXISTING FOOTWAYS WIDENED TO 3M.
PROPOSED FOOTPATH LINK INTO SITE.
EXISTING ZEBRA CROSSING
EXISTING 20MPH SIGNAGE BACK TO BACK WITH 40MPH SIGNAGE AND MARKINGS TO BE MOVED SOUTH-EAST OF SITE FRONTAGE, EXACT LOCATION TO BE AGREED WITH LA ENGINEER.
PROPOSED 15Mx3M BUS LAY-BY WITH SHELTER.
FOOTWAY SURFACING ADJACENT TO NEW BUS LAY-BY TBA WITH WREXHAM HIGHWAYS AS DESIGN PROGRESSES.
EXISTING REFUGE ISLAND/KERBS TO BE REMOVED AND CARRIAGEWAY REINSTATED.
EXISTING REDUNDANT ROAD MARKINGS TO BE REMOVED AND REPLACED WITH NEW CENTRE-LINE MARKING TO DIA D004..
PRIOR TO CONSTRUCTION THE CONTRACTOR IS TO SURVEY/PROOF/CONFIRM AND CLEAR EXISTING SURFACE SEWERS/TAILPIPES, CONFIRM PIPE ALIGNMENTS, LEVELS AND PREVENT ANY OBLIQUE CONNECTIONS WITH EXISTING PIPEWORK.
FLAT TOP SPEED TABLE SUITABLE FOR BUSES TO BE 75MM HIGH, 8M FLAT LENGTH WITH MAX 1:20 ON/OFF GRADIENT RAMPS.
NEW FOOTWAYS ALONG SITE FRONTAGE TO BE PROVIDED AS PART OF ON-SITE PROPOSALS.
NEW GULLIES TO CONNECT INTO EXISTING HIGHWAY DRAIN ON ROSSETT ROAD, CONTRACTOR TO CONFIRM EXACT CONNECTIONS ON-SITE.
CONTRACTOR TO MAKE ALLOWANCE FOR LOCALISED TIEING IN OF KERBS AND SURFACING IN ALL AREAS AS NECESSARY AND TO THE SATISFACTION OF THE LOCAL AUTHORITY ENGINEER.
KERBS AND HARDSTANDING AREAS TO BE REMOVED AND MADE GOOD WITHIN THE FOOTPRINT OF THE S278 WORKS AS REQUIRED AND IN ACCORDANCE WITH THE SHW.
NEW GULLIES TO CONNECT INTO ON-SITE DRAINAGE NETWORK, EXACT CONNECTION ROUTES TO BE CONFIRMED BY ON-SITE DESIGN DRAWING AND CONTRACTOR TO CONFIRM LOCATION OF ALL GULLIES/PIPES/CONNECTIONS AND ADEQUATE GRAVITY CONNECTIONS AND FALLS TO GULLY LOCATIONS PRIOR TO CONSTRUCTION.
PRIOR TO COMMENCING WORKS THE CONTRACTOR IS TO ENSURE THAT INTERFACE LEVELS AND PAVEMENTS BETWEEN THE OFF-SITE S278 DESIGN AND INTERNAL ON-SITE DESIGN TIE IN AND ANY DISCREPANCIES TO BE REPORTED IMMEDIATELY TO THE ENGINEER. ALL THRESHOLDS ARE TO TIE IN AND PAVEMENT-KERBING MADE GOOD WITH LOCALISED REPAIRS WHERE NECESSARY TO THE SATISFACTION OF THE OVERSEEING LA ENGINEER. CONTRACTOR TO CONFIRM ADEQUATE FALLS TO ADJACENT DRAINAGE AREAS PRIOR TO COMMENCING WORKS.
R10.0M
EXISTING TELEGRAPH POLE TO BE REMOVED/RELOCATED. PLEASE REFER TO DEVELOPERS M&E DRAWINGS FOR DETAILS OF ANY ALTERATIONS TO EXISTING STATS EQUIPMENT. ANY STATS DIVERSION DETAILS SHALL BE PROVIDED TO WREXHAM HIGHWAYS FOR REVIEW. ALL EXISTING STATS COVERS AFFECTED BY THE WORKS TO BE RESET TO NEW CARRIAGEWAY LEVEL WHERE REQUIRED.
EXISTING REDUNDANT HATCHED ROAD MARKINGS TO BE REMOVED AND REPLACED WITH NEW CENTRE-LINE MARKING TO DIA 1004.
ALL EXISTING GRASSED VERGE IMMEDIATELY ADJACENT TO FOOTWAYS TO BE RE-SOILED, SEEDED AND TURFED IN ACCORDANCE WITH WREXHAM REQUIREMENTS AND TO THE SATISFACTION OF THE LA ENGINEER.
PRIOR TO COMMENCING WORKS THE CONTRACTOR IS TO ENSURE THAT INTERFACE LEVELS AND PAVEMENTS BETWEEN THE OFF-SITE S278 DESIGN AND INTERNAL ON-SITE DESIGN TIE IN AND ANY DISCREPANCIES TO BE REPORTED IMMEDIATELY TO THE ENGINEER. ALL THRESHOLDS ARE TO TIE IN AND PAVEMENT-KERBING MADE GOOD WITH LOCALISED REPAIRS WHERE NECESSARY TO THE SATISFACTION OF THE OVERSEEING LA ENGINEER. CONTRACTOR TO CONFIRM ADEQUATE FALLS TO ADJACENT DRAINAGE AREAS PRIOR TO COMMENCING WORKS.
PLEASE REFER TO DEVELOPERS M&E DRAWINGS FOR DETAILS OF ANY ALTERATIONS TO EXISTING STATS EQUIPMENT. ANY STATS DIVERSION DETAILS SHALL BE PROVIDED TO WREXHAM HIGHWAYS FOR REVIEW. ALL EXISTING STATS COVERS AFFECTED BY THE WORKS TO BE RESET TO NEW CARRIAGEWAY LEVEL WHERE REQUIRED.
NEW GULLIES TO CONNECT INTO ON-SITE DRAINAGE NETWORK, EXACT CONNECTION ROUTES TO BE CONFIRMED BY ON-SITE DESIGN DRAWING AND CONTRACTOR TO CONFIRM LOCATION OF ALL GULLIES/PIPES/CONNECTIONS AND ADEQUATE GRAVITY CONNECTIONS AND FALLS TO GULLY LOCATIONS PRIOR TO CONSTRUCTION.
CONTRACTOR TO ENSURE HB2 TO BN TRANSITION KERBS ARE LAID EITHER SIDE OF ALL CROSSING POINTS TO THE SATISFACTION OF THE LA ENGINEER.
PRIOR TO CONSTRUCTION THE CONTRACTOR IS TO SURVEY/PROOF/CONFIRM AND CLEAR EXISTING SURFACE SEWERS/TAILPIPES, CONFIRM PIPE ALIGNMENTS, LEVELS AND PREVENT ANY OBLIQUE CONNECTIONS WITH EXISTING PIPEWORK.
NEW FOOTWAYS ALONG SITE FRONTAGE TO BE PROVIDED AS PART OF ON-SITE PROPOSALS.
POTENTIAL LOCATION OF 20MPH SIGNAGE BACK TO BACK WITH 40MPH SIGNAGE AND MARKINGS.
ROAD HUMPS WARNING SIGN.
EXISTING VEHICLE CROSSING TO REMAIN UNAFFECTED.
NEW FOOTWAY LINK WITH UNCONTROLLED CROSSING TO EXISTING FOOTWAY ON WESTERN SIDE OF TREVALYN WAY.
EXISTING VEHICLE CROSSING TO REMAIN UNAFFECTED.
NEW FOOTWAY LINK WITH UNCONTROLLED CROSSING TO EXISTING FOOTWAY ON WESTERN SIDE OF TREVALYN WAY.
NEW 3M WIDE FOOTWAY TO TIE INTO EXISTING FOOTWAY AT DARLAND VIEW AND INTERNAL SITE FOOTWAY.
NEW 3M WIDE FOOTWAY TO TIE INTO EXISTING FOOTWAY PROVISION AT DARLAND HIGH SCHOOL AND INTERNAL SITE FOOTWAY.
LAND OWNERS PERMISSION TO BE GRANTED FOR FOOTWAY WORKS.
LAND OWNERS PERMISSION TO BE GRANTED FOR FOOTWAY WORKS.
PROPOSED LINK TO DARLAND HIGH SCHOOL. SUBJECT TO AGREEMENT WITH SCHOOL.
N
E
S
W

NORTHERN FOOTWAY LINKS OUTSIDE OF SITE BOUNDARY @ 1:500 SCALE

Z:\projects\3261 DD S278 Rossett Road, Wrexham, Castle Green\CAD\Croft Drawings\S278 Rossett Road, Wrexham Mastercopy (3261) REV L.dwg

WARNING:- PRESENCE OF EXISTING STATS EQUIPMENT IN THE VICINITY OF WORKS

PRESENCE OF STATUTORY UNDERTAKERS EQUIPMENT IN THE HIGHWAY SHOULD BE VERIFIED BY THE CONTRACTOR ON SITE PRIOR TO STARTED ANY WORKS. THE LOCATION OF STATUTORY PLANT SHOWN ON ANY PLAN IS INDICATIVE ONLY AND SHOULD NOT BE RELIED UPON FOR THE LOCATION OF ANY PIPEWORK OR CABLING. THE CONTRACTOR SHOULD CONFIRM THE LOCATION OF ALL STATS PLANT BY HAND DUG TRIAL TRENCHES PRIOR TO COMMENCING ANY WORKS. ALLOWANCE FOR THE PRESENCE OF ALL STATS APPROPRIATE PROTECTION / DIVERSION MEASURES (INCORPORATING SPLIT DUCT AND 150MM CONCRETE SURROUND OR SIMILAR STATUTORY APPROVED METHOD) IS TO BE PUT IN PLACE BY THE CONTRACTOR (UNLESS STATED OTHERWISE) WHERE STATS EQUIPMENT ARE FOUND TO BE WITHIN THE AREA OF HIGHWAY WORKS.

1. ALL ADOPTABLE SEWERS AND ASSOCIATED WORKS ARE TO COMPLY FULLY WITH "SEWERS FOR ADOPTION" 7TH EDITION. ALL DRAWINGS ARE TO BE READ IN CONJUNCTION WITH THE ON-SITE DRAWINGS PRIOR TO UNDERTAKING ANY WORKS AND ANY DISCREPANCIES WITH BOUNDARIES, FENCELINES, EARTHWORKS OR OTHERWISE REPORTED IMMEDIATELY TO THE ENGINEER PRIOR TO WORKS COMMENCING.

2. ALL HIGHWAY AND DRAINAGE WORKS TO BE TO ADOPTABLE STANDARDS AND SHALL COMPLY FULLY WITH THE LOCAL AUTHORITY SPECIFICATION, APPROVED STANDARD DETAILS AND THE RELEVANT SECTIONS OF THE DESIGN MANUAL FOR ROADS AND BRIDGES, SPECIFICATION FOR HIGHWAY WORKS AND BRITISH STANDARDS. CONTRACTOR TO ENSURE POSITIVE DRAINAGE TO ALL GULLIES PRIOR TO UNDERTAKING ANY PAVEMENT WORKS.

3. ANY PRIVATE WORKS ARE TO COMPLY FULLY WITH THE LATEST EDITIONS OF THE BUILDING REGULATIONS

4. ALL EXISTING STATIONS, INVERT LEVELS AND DRAINAGE NETWORK TO BE CHECKED BY THE CONTRACTOR AT THE START OF WORKS AND ANY DISCREPANCIES NOTIFIED TO THE ENGINEER. ALL LEVELS ARE BASED ON TOPOGRAPHICAL SURVEY INFORMATION PROVIDED BY OTHERS. ANY DISCREPANCIES BETWEEN THIS AND OTHER DRAWINGS TO BE REPORTED TO THE ENGINEER PRIOR TO CONSTRUCTION

5. ALL MATERIALS TO BEAR THE RELEVANT B.S.KITEMARK AND COMPLY FULLY WITH THE SPECIFICATIONS. ALL MATERIALS TO BE AGREED WITH THE OVERSEEING LOCAL AUTHORITY REPRESENTATIVE PRIOR TO ORDERING. ALL CONCRETE & CONCRETE PRODUCTS MUST USE SULPHATE RESISTANT CEMENT (UNLESS THE SITE INVESTIGATION REPORT PROVES THAT SULPHATE ATTACK FROM SOILS AND GROUNDWATER WILL NOT OCCUR)

6. ALL STATUTORY CONSENTS, OPENING NOTICES ETC. AS REQUIRED UNDER HIGHWAYS ACTS AND WATER INDUSTRIES ACTS,. ARE TO BE OBTAINED BY THE CONTRACTOR PRIOR TO COMMENCEMENT OF THE WORKS (UNLESS OTHERWISE STATED). ALL WORKS ARE TO BE INSPECTED BY L.A., NHBC OR STATUTORY AUTHORITY AS APPLICABLE.

7. CONTRACTOR TO MAKE ADVANCE ALLOWANCE FOR THE MANAGEMENT AND COORDINATION OF STATUTORY UNDERTAKERS DIVERSIONS WITHIN THEIR PROGRAMME OF WORKS. PRESENCE OF STATUTORY UNDERTAKERS EQUIPMENT IN THE HIGHWAY SHOULD BE VERIFIED BY THE CONTRACTOR ON SITE PRIOR TO STARTING ANY WORKS. THE LOCATION OF STATUTORY PLANT SHOWN ON ANY PLANS IS INDICATIVE ONLY AND SHOULD NOT BE RELIED UPON FOR THE LOCATION OF ANY PIPEWORK OR CABLING. THE CONTRACTOR SHOULD CONFIRM THE LOCATION OF ALL STATS PLANT BY HAND DUG TRIAL TRENCHES PRIOR TO COMMENCING ANY WORKS. ALLOWANCE FOR THE PRESENCE OF ALL STATS APPROPRIATE PROTECTION / DIVERSION MEASURES (INCORPORATING SPLIT DUCT AND 150MM CONCRETE SURROUND OR SIMILAR STATUTORY APPROVED METHOD) IS TO BE PUT IN PLACE BY THE CONTRACTOR (UNLESS STATED OTHERWISE) WHERE STATS EQUIPMENT ARE FOUND TO BE WITHIN THE AREA OF HIGHWAY WORKS.

8. PRIOR TO ORDERING THE CONTRACTOR IS TO AGREE ALL SIGN POST/LIGHTING COLUMN MATERIALS AND FINISHES WITH THE LOCAL AUTHORITY. ALL SIGNS TO COMPLY WITH BS EN 12899:2007 AND ITS NATIONAL ANNEX. TYPE OF POSTS, FINISHES AND LIGHTING UNITS/COLUMNS TO BE AGREED WITH LA STREETLIGHTING ENGINEER PRIOR TO ORDERING. CONTRACTOR IS RESPONSIBLE FOR COORDINATING THE PROVISION OF ALL REQUIRED EQUIPMEMT AND ELECTRICAL FEEDS TO LIGHTING AND ANY SIGNALS PRIOR TO WORKS COMMENCING, CONTRACTOR TO MAKE ALLOWANCE FOR ANY LEAD-INS WITHIN THEIR PROGRAMME.

9. ALL ROADMARKINGS TO BE LAID IN ACCORDANCE WITH THE REQUIREMENTS OF THE TRAFFIC SIGNS MANUAL CHAPTER 5, TRAFFIC SIGNS REGULATIONS AND GENERAL DIRECTIONS. ROADMARKING MATERIALS, LAYING AND PERFORMANCE TO BE IN ACCORDANCE WITH THE REQUIREMENTS OF BS EN 1436.ALL ACCESS COVERS WITHIN THE VICINITY OF THE WORKS TO HAVE HIGH FRICTION COVERS AND AGREED WITH LA ENGINEER. PSV OF ALL LINING AND COVERS TO SUIT ADJACENT SURFACING

10. THE CONTRACTOR IS RESPONSIBLE FOR ENSURING THAT ALL ADVANCE NOTICES ARE IN PLACE AND TRAFFIC MANAGEMENT AGREED FOR THE WORKS PRIOR TO COMMENCING. THE CONTRACTOR IS TO MAKE ALLOWANCE FOR THE ADVANCE PROVISION OF ALL ELECTRICAL WORKS AND EQUIPMENT FOR SIGNALS AND STREETLIGHTING WITHIN THEIR PROGRAMME OF WORKS

C.D.M. REGULATIONS 2015

IN LINE WITH THE ABOVE REGULATIONS WE ARE OBLIGED TO INFORM THE CLIENT OF THE RISKS THAT MAY BE ENCOUNTERED IN THE CONSTRUCTION OF THESE WORKS. WHEREVER POSSIBLE RISKS HAVE BEEN ELIMINATED FROM THE DESIGN, HOWEVER DUE TO THE VERY NATURE OF THIS TYPE OF WORK IT IS NOT POSSIBLE TO REMOVE ALL THE RISKS FROM THE DESIGN. WE WOULD ALSO RESPECTFULLY REMIND THE CLIENT OF HIS OBLIGATIONS TO TAKE ALL REASONABLE STEPS IN ENSURING THAT ONLY COMPETENT CONTRACTORS WHO HAVE A VALID SAFETY POLICY ARE EMPLOYED. THEY SHOULD ALSO PROVIDE SATISFACTORY RESPONSES AT TENDER STAGE AS TO THE MANNER IN WHICH THEY WILL DEAL WITH THE ELEMENTS OF RISK INVOLVED IN THIS TYPE OF WORK AND IN PARTICULAR THOSE HIGHLIGHTED BY CROFT BELOW:-

1. TRENCH EXCAVATIONS IN EXCESS OF 1.2M DEEP.
2. GUARDING TO EDGES OF EXCAVATIONS TO PREVENT PEOPLE, MATERIALS AND VEHICLES FALLING INTO EXCAVATION.
3. GUARDING OF EXCAVATIONS OUTSIDE WORKING HOURS TO PREVENT UNAUTHORISED ACCESS.
4. UNDERMINING TO ADJACENT ROADS OR STRUCTURES.
5. CONFINED SPACE OPERATIONS.
6. DEALING WITH EXISTING SERVICES.
7. TRAFFIC MANAGEMENT ON EXISTING HIGHWAYS AND PROTECTION OF SITE PERSONNEL AND MEMBERS OF THE PUBLIC.
8. PROCEDURE TO BE FOLLOWED IN EVENT OF ACCIDENT OR EMERGENCY.
9. METHOD OF WORKING WHERE CONTAMINATED GROUND IS PRESENT ON SITE.
10. CONFIRMATION WILL BE REQUIRED THAT ALL OPERATIVES ARE ADEQUATELY TRAINED, COPIES OF RELEVANT TRAINING CERTIFICATES TO BE SUPPLIED.
11. ANY CONSTRUCTION PERSONNEL, INCLUDING OPERATIVES INTENDING TO CONSTRUCT THE DESIGNS SHOWN ON THIS DRAWING SHOULD ENSURE THAT THEY HAVE BEEN REGULARLY AND THOROUGHLY BRIEFED BY THE PRINCIPAL CONTRACTOR ON ALL HEALTH AND SAFETY MATTERS AND HAVE HAD SIGHT OF:

I) THE FULL DESIGNERS AND CONTRACTORS RISK ASSESSMENTS AND RISK REGISTERS.
II) THE DEVELOPED CONSTRUCTION HEALTH AND SAFETY PLAN
III) THE CONTRACTORS CONSTRUCTION METHOD STATEMENTS.

THE ABOVE LIST IS BY NO MEANS EXHAUSTIVE BUT IT DOES HIGHLIGHT OPERATIONS THAT PRESENT A RISK TO CONTRACTORS AND THE GENERAL PUBLIC.

NOTES

▨ FULL DEPTH CARRIAGEWAY CONSTRUCTION-(NO LIMESTONE AGGREGATE TO BE USED IN SURFACE COURSES OR ANY SURFACES TO BE TEMPORARILY TRAFFICKED). ALL MATERIALS TO BE LAID AND TRANSPORTED IN ACCORDANCE WITH THE SHW. BITUMINOUS SPRAY TO BE APPLIED IN ACCORDANCE WITH CLAUSE 920 OF THE SHW.

SURFACE:	40MM THICK HRA 35/14 SURF 40/60 DES 20MM PRECOATED CHIPPINGS PSV MIN 60 TO BS EN 13108.
BINDER:	60MM THICK AC 20 DENSE BIN 40/60 REC TO BS EN 13108.
BASE:	150MM THICK AC32 BASE 40/60 REC TO BS EN 13108.
SUB BASE:	MIN 150MM THICK SUB-BASE (SUBJECT TO ON-SITE CBR RESULTS-PLEASE REFER TO TABLE ON D004) IN TYPE 1 GRANULAR MATERIAL. LAID AND COMPACTED TO THE SPECIFICATION FOR HIGHWAY WORKS CLAUSES 701, 801, & 803.
CAPPING:	REQUIRED CAPPING DEPTH SUBJECT TO ON-SITE CBR TEST RESULTS. FOR ALL CAPPING DETAILS PLEASE REFER TO THE TABLE PROVIDED ON THE STANDARD DETAILS PLAN AND THE DMRB FOR FURTHER GUIDANCE. CBR TO BE ESTABLISHED ON SITE PRIOR TO STARTING WORKS. CONTRACTOR TO REFER RESULTS TO A REPRESENTATIVE OF THE LOCAL AUTHORITY AND THE DESIGN MANUAL FOR ROADS AND BRIDGES VOLUME 7, SECTION 2, PART 3 CHAPTER 3 FOR FURTHER GUIDANCE ON SUB-BASE CAPPING RELATIONSHIP. APPROPRIATE TERRAM GEOTEXTILE MEMBRANE TO BE LAID BENEATH CAPPING LAYER TO MANUFACTURER'S PROPRIETARY REQUIREMENTS.

■ NARROW WIDENING IN AREAS LESS THAN 1.2M

AS FULL DEPTH CARRIAGEWAY CONSTRUCTION BUT BASE AND SUB-BASE LAYER REPLACED WITH ST2 CONCRETE. PLEASE SEE STANDARD DETAIL ON DWG D004.

▨ FOOTWAY CONSTRUCTION

20MM THICK AC6 DENSE SURF 100/150 REC TO BS EN13108
60MM THICK AC20 DENSE BIN 100/150 REC TO BS EN13108
160MM THICK TYPE 1 SUB BASE 225MM AT VEHICLE CROSSINGS

▤ FOOTWAY RESURFACING

EXISTING FOOTWAY SURFACE AND BINDER REMOVED AND REPLACED WITH FOOTWAY SPEC AS ABOVE.

▦ SPEED CUSHION

35MM HRA SURFACE COURSE (NOMINAL 14MM AGGREGATE) WITH COATED RED CHIPPINGS (MIN PSV 65+)
40MM HRA BINDER COURSE (NOMINAL 14MM AGGREGATE)
HRA BINDER REGULATING COURSE
SEE STANDARD DETAILS PROVIDED

KERBING

ALL KERBS, CHANNELS, FLAGS, EDGINGS ETC CONSTRUCTED TO THE REQUIREMENTS OF BS EN 1339,1340, BS 7533 AND BS 7263. ANY GAP BETWEEN KERB AND EXISTING CARRIAGEWAY TO BE FILLED WITH HOT POURED BITUMEN MAX WIDTH 20MM. WHERE THE GAP IS GREATER THAN 20MM IT SHALL BE REINSTATED AS SHOWN IN THE REINSTATEMENT STANDARD DETAIL. ALL NEW TO EXISTING SURFACE COURSE JOINTS TO BE SEALED WITH HOT POUR BITUMEN. WHERE NECESSARY EXISTING SURFACES TO BE SAW CUT TO PROVIDE A NEAT VERTICAL EDGE.

— DENOTES NEW KERBS & EDGINGS

HB2 PRECAST CONCRETE 'HALF BATTERED' KERB 125X255, BS REF 'HB2' SET WITH 125MM FACE UNLESS OTHERWISE INDICATED/TIED IN WITH EXISTING TO INCLUDE TAPER KERBS 125 X 255/150, BS REF 'DL1, 'DR1'.

PROPOSED HB2 KERBS AND ASSOCIATED TRANSITION/DROPPER KERBS EITHER SIDE OF THE PROPOSED PEDESTRIAN CROSSING ARE AVAILABLE FROM SUPPLIERS, WITHOUT THE NEED TO CUT KERBS.

EF PRE-CAST CONCRETE 'FLAT TOP' EDGING 200X50, BS REF 'EF'. FLUSH WITH FOOTWAY SURFACE.

BN DROPPED KERB CONSISTING OF PRECAST CONCRETE 'BULL NOSE' KERB 125 X 150, BS REF 'BN'. KERB SET FLUSH OR 6MM UPSTAND

▦ TACTILE PAVING

450X450X80 CONCRETE 'BUFF' COLOURED TACTILE PAVING FLAGS
50MM 4:1 SAND/CEMENT BED
200MM TYPE 1 GRANULAR SUB-BASE MATERIAL TO CLAUSE 803

■ EXISTING GULLY GRATING AND FRAME TO BE REMOVED TO TIP AND POT FILLED WITH MIX ST2 CONCRETE TO BELOW FORMATION LEVEL.

■ PRECAST CONCRETE STREET GULLY 450MM DIA X 900MM TO BS 5911 BS EN 124 WITH DUCTILE IRON HINGE GULLY GRATE AND 150MM FRAME WITH ENCAPSULATING GRATING TO EN 124 D400 SINGLE PIECE HINGED. LOCATION AND NATURE OF SEWER TO BE CONFIRMED ON SITE PRIOR TO COMMENCING ANY DRAINAGE WORKS. CONTRACTOR TO ENSURE THAT NO OBLIQUE TURNS ARE MADE IN ALL GULLY CONNECTIONS AND ADJUST CONNECTIONS WHERE NECESSARY TO THE SATISFACTION OF THE LA ENGINEER.

■ EXISTING GULLY TO REMAIN.

PRIOR TO CONSTRUCTION THE CONTRACTOR IS TO SURVEY/PROOF AND IF NECESSARY CLEAR EXISTING SURFACE SEWERS/TAILPIPES TO CONFIRM PIPE ALIGNMENTS AND PREVENT ANY OBLIQUE CONNECTIONS WITH EXISTING PIPEWORK.

REV	DETAILS	DRAWN	CHECKED	DATE
J	REVISED FOLLOWING WREXHAM COMMENTS	JC	MC	AUG 22
I	REVISED FOLLOWING WREXHAM COMMENTS	JC	MC	JUN 22
H	REVISED FOLLOWING WREXHAM PLANNING COMMENTS	JC	MC	FEB 22
G	REVISED FOLLOWING WREXHAM FIRST TECHNICAL REVIEW	JC	MC	NOV 21
F	REVISED FOLLOWING WREXHAM PLANNING COMMENTS	JC	MC	OCT 21
E	REVISED FOLLOWING WREXHAM PLANNING COMMENTS	JC	MC	OCT 21
D	ADDITIONAL CROSSING ON HOLT ROAD	JC	MC	OCT 21
C	REVISED IN LINE WITH STAGE 1/2 RSA	JC	MC	MAY 21
B	ADDITIONAL FOOTWAY LINKS OUTSIDE OF RED EDGE ADDED	JC	MC	APR 21
A	ADDITIONAL FOOTWAY LINKS OUTSIDE OF RED EDGE ADDED	JC	MC	MAR 21

CLIENT:
MACBRYDE HOMES

PROJECT:
ROSSETT ROAD,
WREXHAM

DRAWING TITLE:
S278 CONSTRUCTION MATERIALS

SCALES:
1:250 @ A0

DRAWN: JC
CHECKED: MC
DATE: JAN 21

Croft Transport Planning & Design
340 Deansgate
Manchester
M3 4LY

Email: info@croftts.co.uk
Tel: 0161 837 7380
Web: www.eddisons.com/services/transport-planning

DRAWING NUMBER: 3261-D002
REVISION: J

Eddisons | Incorporating Croft