
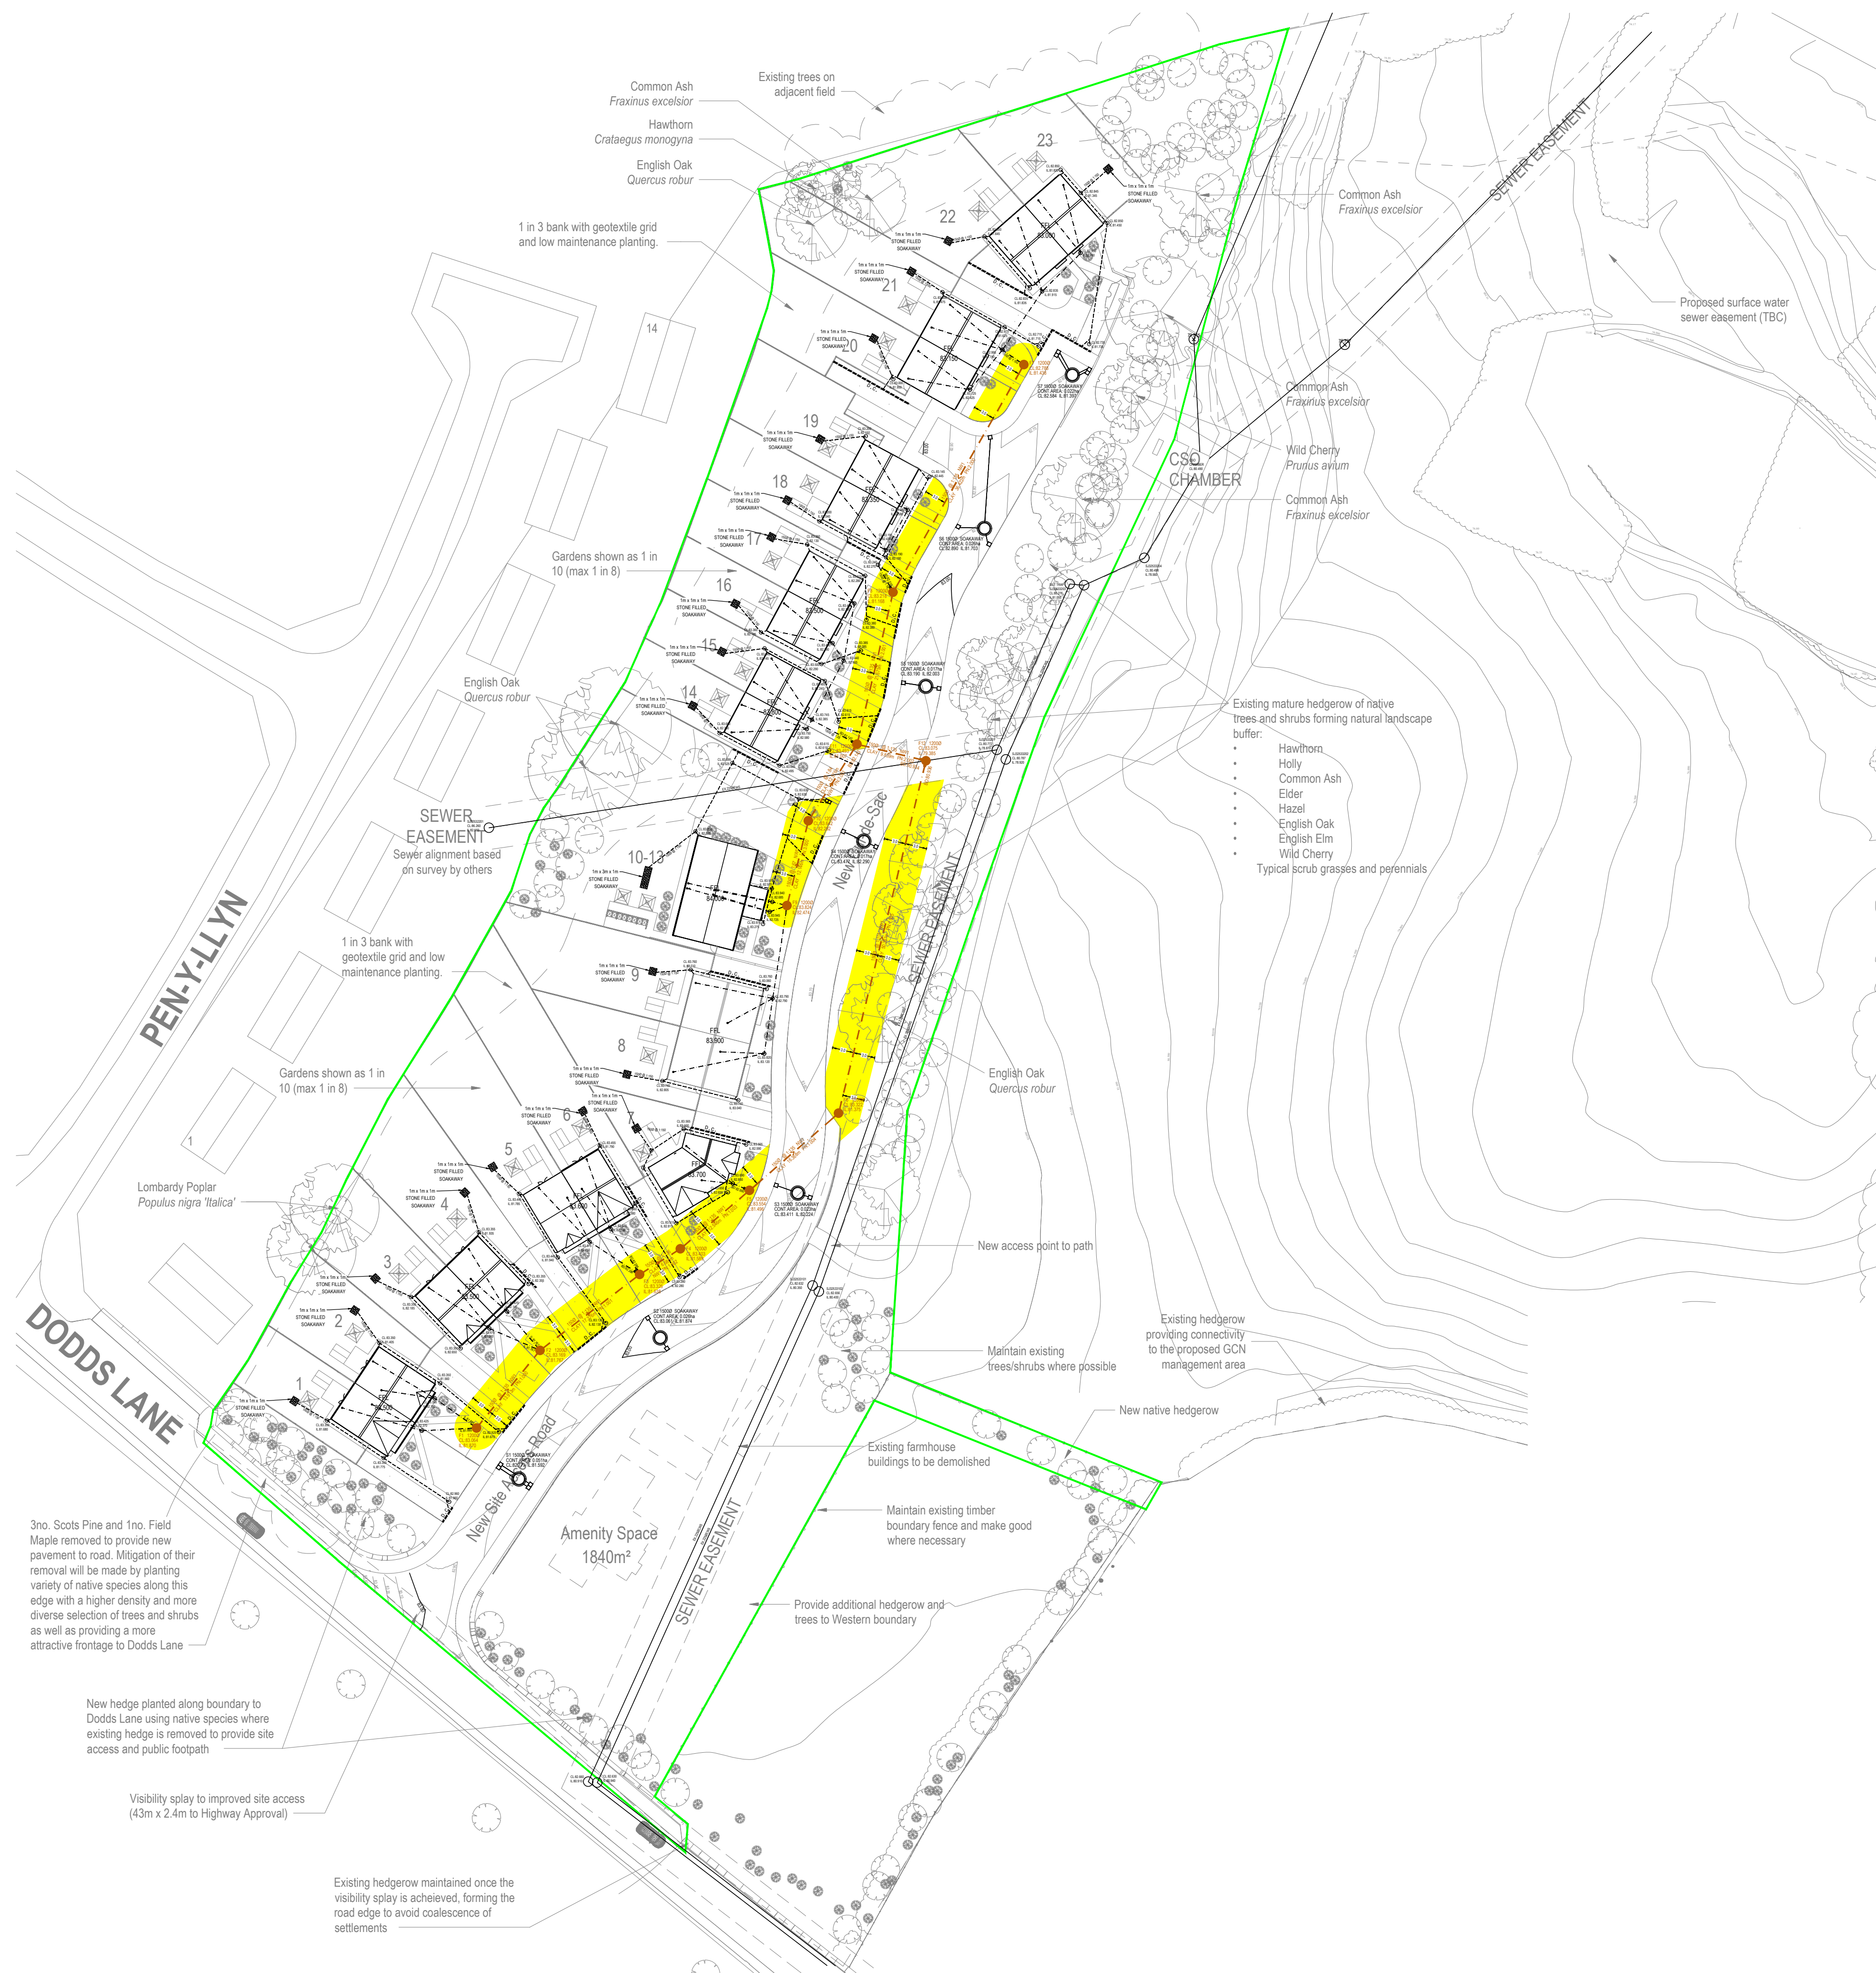


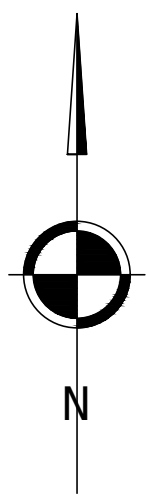


## GENERAL NOTES

- SETTING OUT SHALL BE UNDERTAKEN USING ONLY THE INFORMATION GIVEN. DISTANCES SHOULD NOT BE SCALED FROM THIS DRAWING.
- ALL SEWERS SHALL BE CONSTRUCTED IN ACCORDANCE WITH SEWERS FOR ADOPTION 7TH EDITION ADDENDUM MARCH 2019.
- THE MINIMUM GRAVITY PIPE DIAMETER UNDER ADOPTABLE HIGHWAYS SHALL BE 150mm
- IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY ALL INFORMATION GIVEN WITH REGARDS TO EXISTING SERVICES AND DRAINAGE CONNECTIONS ETC. PRIOR TO COMMENCING THE WORKS. THE RATES SHALL INCLUDE FOR HAND DIG AROUND SERVICES WHERE NECESSARY. THE CONTRACTOR SHALL ADHERE TO THE CDM REGULATIONS AT ALL TIMES
- THE OUTSIDES OF ALL SEWERS SHALL BE A MINIMUM OF 1.0m FROM KERB LINES AND THE OUTSIDE OF MANHOLES SHALL BE A MINIMUM OF 0.5m FROM KERB LINES
- EXISTING FLOWS IN WATERCOURSES, SEWERS AND LAND DRAINS SHALL BE MAINTAINED AT ALL TIMES
- ONLY TRAINED PERSONNEL SHALL BE PERMITTED TO ENTER CONFINED SPACES
- ALL MATERIALS TO BEAR THE RELEVANT B.S. KITEMARK AND COMPLY FULLY WITH THE SPECIFICATIONS. ALL CONCRETE & CONCRETE PRODUCTS MUST USE SULPHATE RESISTANT CEMENT (UNLESS THE SITE INVESTIGATION REPORT PROVES THAT SULPHATE ATTACK FROM SOILS AND GROUNDWATER WILL NOT OCCUR TO WITHSTAND A CLASS
- ALL OPENING NOTICES ETC. AS REQUIRED UNDER HIGHWAYS ACTS ETC. ARE TO BE OBTAINED PRIOR TO COMMENCEMENT OF WORKS. ALL WORKS ARE TO BE INSPECTED BY L.A., NHBC OR THE NETWORK OPERATOR AS APPLICABLE.
- WHERE 'ULTRA RIB' UPVC PIPES (OR SIMILAR APPROVED) ARE USED IN ADOPTABLE DRAINAGE THEY SHALL STILL BE HANDLED AND LAID IN ACCORDANCE WITH THE SPECIFICATION AND GUIDANCE ISSUED BY THE HIGH PERFORMANCE PIPE ASSOCIATION.
- A CLASS 3 BED AND SURROUND MUST BE USED FOR SUCH PIPES. TRENCH BACKFILL IN HIGHWAYS TO WITHIN 1M OF HIGHWAY SHALL AS DIRECTED BY THE HIGHWAY AUTHORITY BE A SUITABLE GRANULAR MATERIAL ALL IN ACCORDANCE WITH SEWERS FOR ADOPTION CL 4.3.4.
- SLAB LEVELS SHALL NOT BE VARIED WITHOUT REFERENCE TO THE ENGINEER FOR GUIDANCE
- DOMESTIC DRAINAGE SHALL BE TO BUILDING REGULATIONS APPROVED DOCUMENT H. 110mm U.P.V.C. PIPES LAID TO THE FOLLOWING MINIMUM FALLS UNLESS OTHERWISE SHOWN.

|           | FOUL    | S.W.     |
|-----------|---------|----------|
| HEAD RUN  | 1 IN 40 | 1 IN 60  |
| ELSEWHERE | 1 IN 80 | 1 IN 100 |
- ALL GULLY CONNECTIONS TO BE 150mm VITRIFIED CLAY UNLESS NOTED OTHERWISE
- MINIMUM COVER TO DRAINAGE SOFFIT LEVEL:

|  | LANDSCAPING | TRAFFICKED AREAS | HIGHWAYS |
|--|-------------|------------------|----------|
|  | 0.600m      | 0.900m           | 1.200m   |

  - CLASS 'S' BEDDING AND SURROUND TO BE USED WHERE MINIMUM COVER IS ACHIEVED.
  - WHERE MINIMUM COVER IS NOT ACHIEVED CLASS 'Z' BEDDING AND SURROUND (CONCRETE ENCASEMENT) IS TO BE USED.

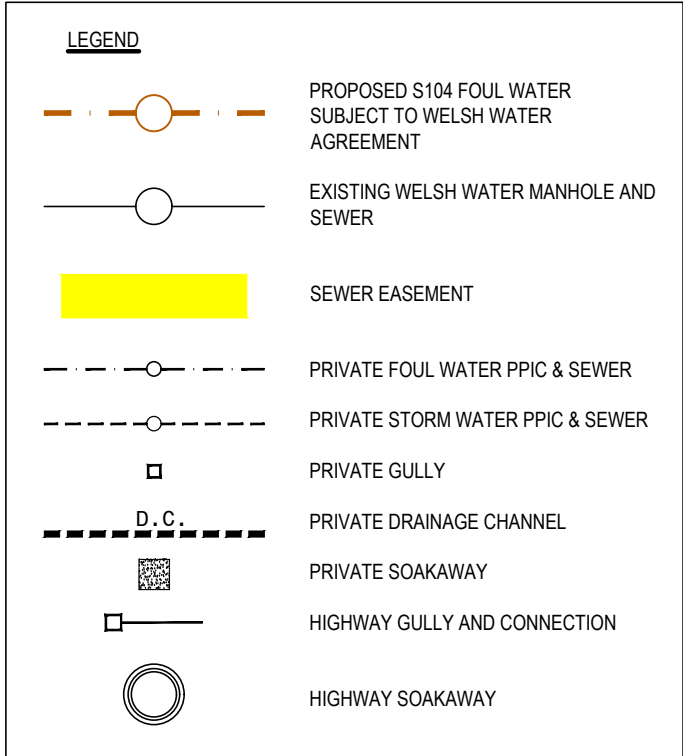

|     |            |                                                                      |    |     |     |
|-----|------------|----------------------------------------------------------------------|----|-----|-----|
| P5  | 03.03.2022 | ARCHITECT & TITLE NAME UPDATED                                       | KB | KOB | KOB |
| P4  | 24.02.2022 | POROUS TARMAC REPLACED BY HIGHWAY GULLIES/SOAKAWAYS                  | LS | KOB | KOB |
| P3  | 12.10.2021 | ADOPTABLE FOUL RUN F1-F3 UPDATED TO SIT CLOSER TO ADOPTABLE FOOTPATH | LS | AMc | KOB |
| P2  | 14.09.2021 | ADOPTABLE FOUL SEWER ROUTE UPDATED                                   | LS | AMc | KOB |
| P1  | 02.08.2021 | PRELIMINARY ISSUE                                                    | LS | AMc | KOB |
| REV | DATE       | DESCRIPTION                                                          | BY | CHK | APP |

|                 |                    |
|-----------------|--------------------|
| DRAWING STATUS: | <b>PRELIMINARY</b> |
|-----------------|--------------------|

|         |                    |
|---------|--------------------|
| CLIENT: | ANWYL PARTNERSHIPS |
|---------|--------------------|

|            |                 |
|------------|-----------------|
| ARCHITECT: | CREU ARCHITECTS |
|------------|-----------------|

|          |                              |
|----------|------------------------------|
| PROJECT: | WOODLANDS FARM<br>DODDS LANE |
|----------|------------------------------|

|        |                     |
|--------|---------------------|
| TITLE: | S104 AGREEMENT PLAN |
|--------|---------------------|

|         |             |           |                        |               |      |      |             |      |
|---------|-------------|-----------|------------------------|---------------|------|------|-------------|------|
| STATUS: | PROJECT No: | PROJECT   | ORIGINATOR             | VOL/SYS/LEVEL | TYPE | ROLE | DRAWING No. | REV: |
| S2      | 218-295     | WCF - AJP | -XX -00 -DR - C - 1000 |               |      |      |             | P05  |

|             |           |        |          |           |          |
|-------------|-----------|--------|----------|-----------|----------|
| SCALE @ A1: | DESIGNED: | DRAWN: | CHECKED: | APPROVED: | DATE:    |
| 1:500       | LS        | LS     | AMc      | KOB       | JUL 2021 |