


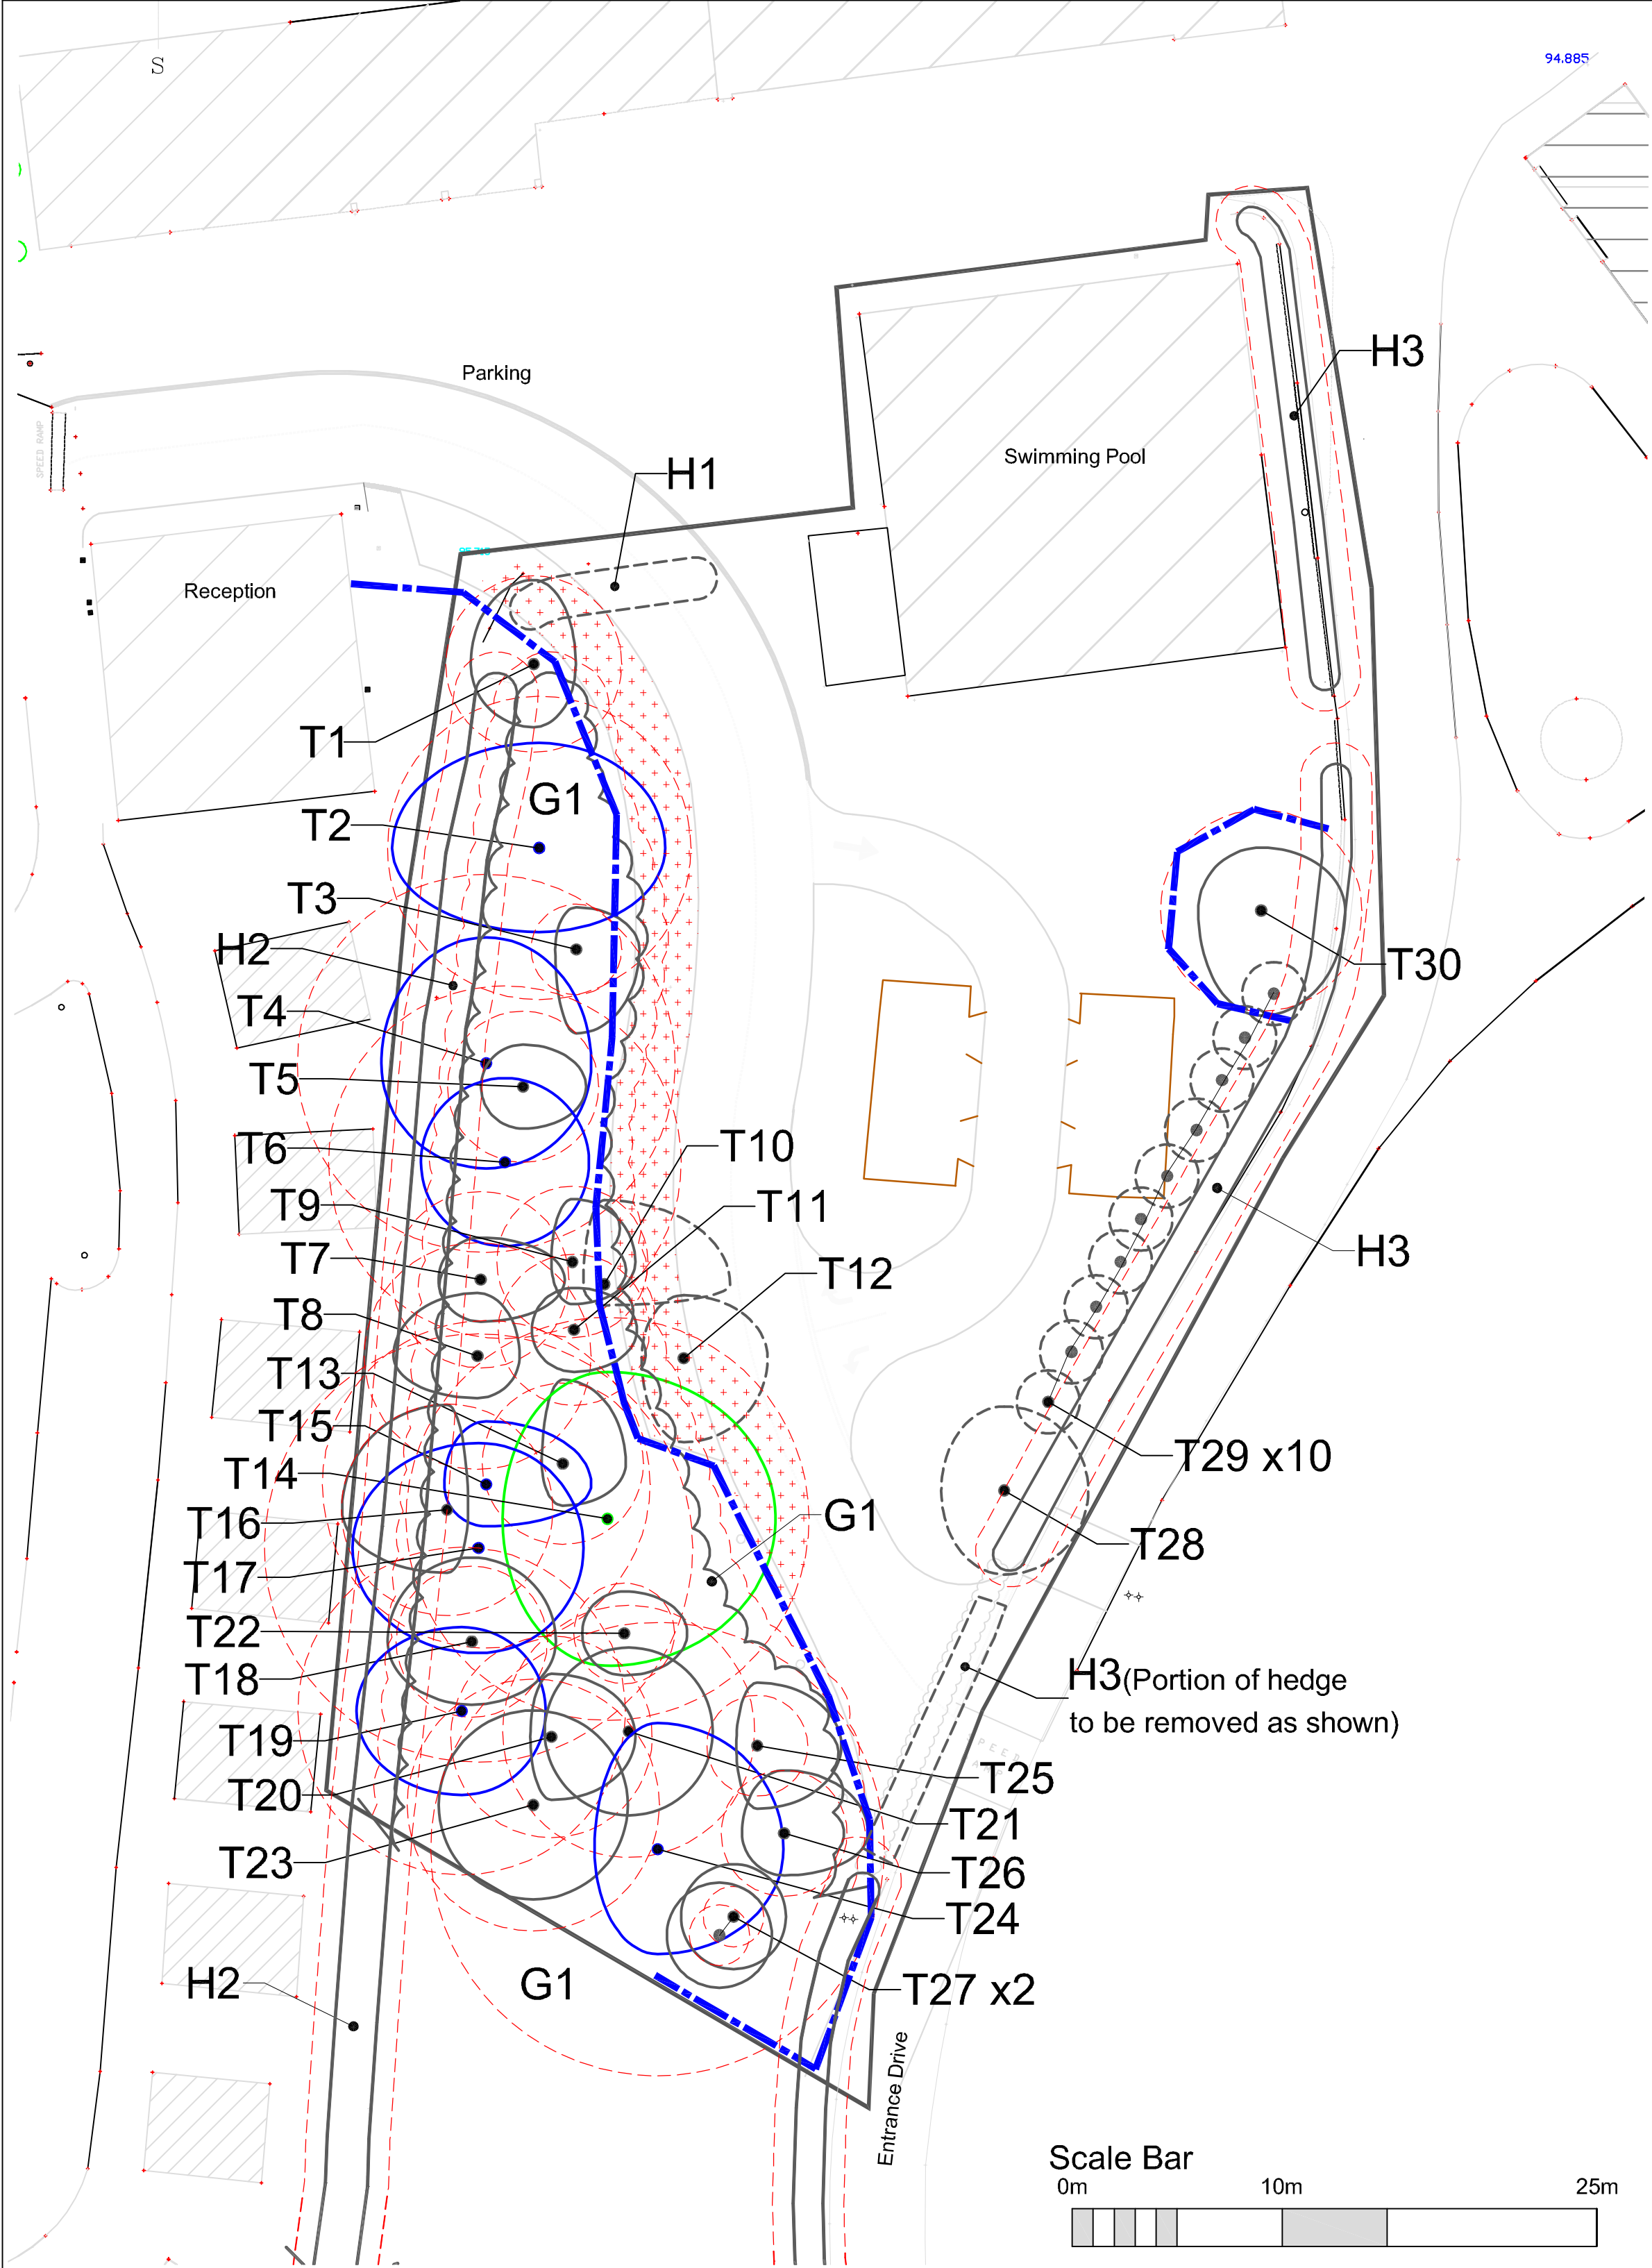

© 2017 RPS Group
Notes
1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
2. If received electronically it is the recipient's responsibility to print to correct scale. Only written dimensions should be used.
3. Where applicable Ordnance Survey (c) Crown Copyright 2017
All rights reserved. Licence number 0100031673

Key


- Survey boundary.
- Tree with numbered reference. Canopy spread and BS5837:2012 tree quality category as shown below.
- Tree (in off-site or estimated location) with numbered reference. Canopy spread and BS5837:2012 tree quality category.
- Vegetation group with numbered reference. Canopy extents and BS5837:2012 tree quality category as shown below.
- Hedge with numbered reference. Width and BS5837:2012 tree quality category as shown below.

BS 5837:2012 Tree Quality Categories - Table 1

- Category A - High quality
- Category B - Moderate quality
- Category C - Low quality
- Category U - Unsuitable for retention

- Root protection area (RPA) Calculated in accordance with Section 4.6 - BS5837:2012
- Tree to be removed with numbered reference. Canopy spread and BS5837:2012 tree quality category.
- Vegetation group or hedge to be removed with numbered reference. Canopy spread and BS5837:2012 tree quality category.
- Temporary protective fencing in accordance with Section 6.2 - BS5837:2012. See inset details for example barriers.
- Above ground construction requiring "No-dig" design principles in accordance with APN12.

- NOTES:
- Refer to RPS Tree Survey Report & Schedule for further details.
 - Survey based on a visual inspection from the ground and is not intended as a full arboricultural inspection.
 - Plan produced in accordance with recommendations set out in BS 5837:2012 - 'Trees in Relation to design, demolition and construction'.
 - Due to the legal protection afforded to breeding birds vegetation removal should not take place during the bird nesting period; generally, although not restricted to, March - August inclusive.
 - Survey based upon topographic survey produced by XXX in XXXX, 201X
 - Pedestrian/ vehicular emergency access routes to be maintained at all times.
 - All protective fencing to be completed and approved by LPA / CA prior to commencement of any site works.
 - All works to conform with requirements of:
BS 3998:2010 - Tree Works
BS 5837:2012 - Trees in relation to design, demolition and construction

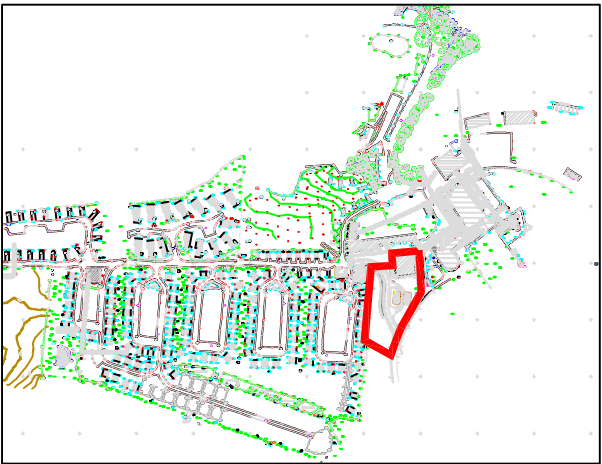

Keyplan (NTS)



Rev	Description	Date	Initial	Checked



Lakesbury House, Hittingbury Road, Chandlers Ford, Hampshire, SO53 5SS
T: 02380 810 440 E: rpsso@rpsgroup.com F: 02380 810 449

Client John Brookshaw

Project The Plassey
Eyton
Entrance Drive / Recycling Centre

Title Tree Removal and Protection Plan

Status	Drawn By	PM/Checked by
Tender	CP	DC
Job Ref	Scale @ A2	Date Created
JSL2868	1:250	Aug 17
Drawing Number	Rev	
730	-	

rpsgroup.com/uk

Figure 2 Default specification for protective barrier

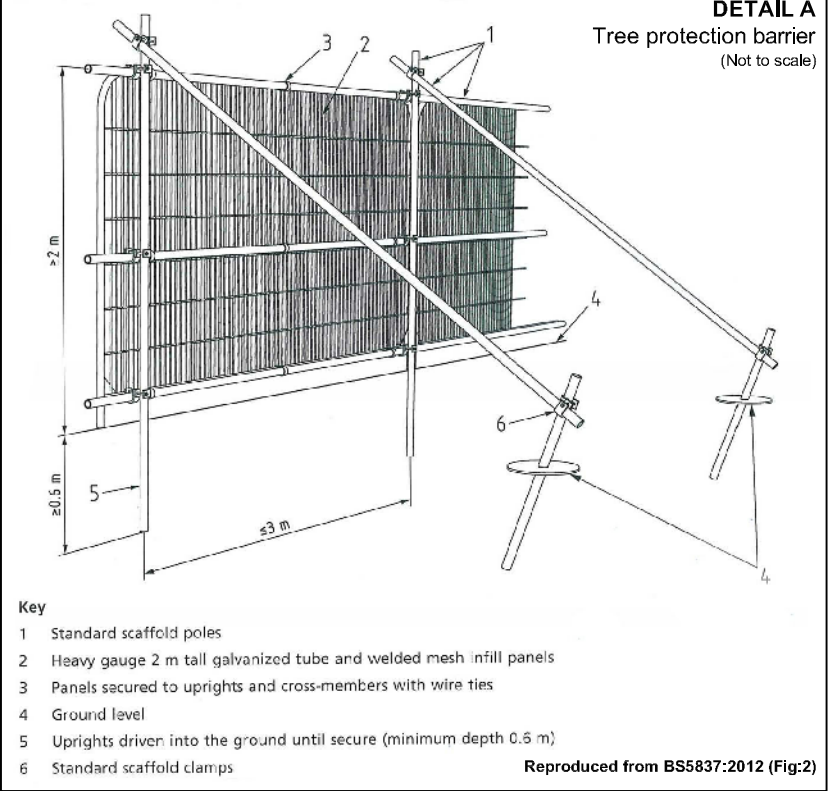


Figure 3 Examples of above-ground stabilizing systems

