




WINDOW 1 GROUND FLOOR STUDIO

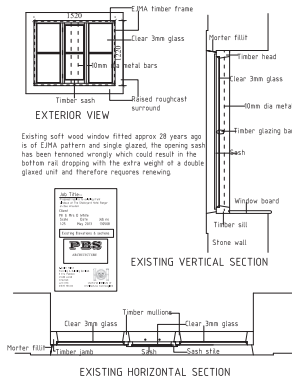


WINDOW 2 GROUND FLOOR LOUNGE

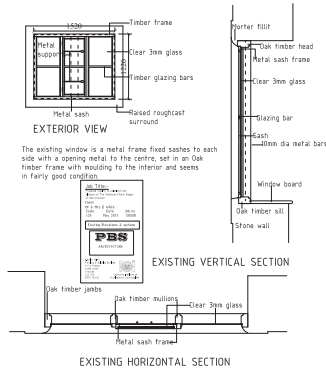


WINDOW 3 GROUND FLOOR DINING

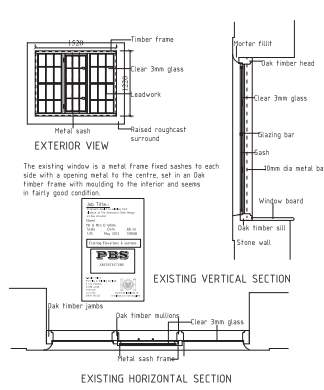


WINDOW 4 GROUND FLOOR RECEPTION

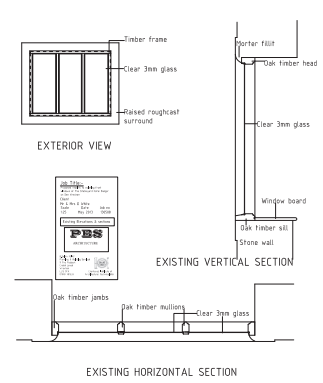


WINDOW 1 GROUND FLOOR STUDIO

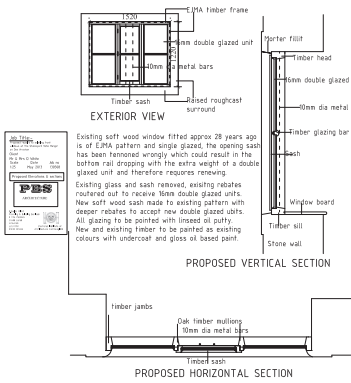


WINDOW 2 GROUND FLOOR LOUNGE

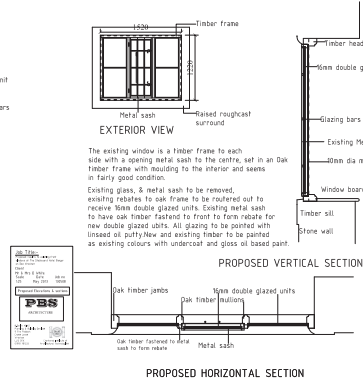

WINDOW 3 GROUND FLOOR DINING

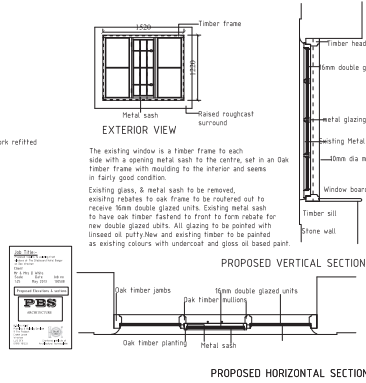

WINDOW 4 GROUND FLOOR RECEPTION

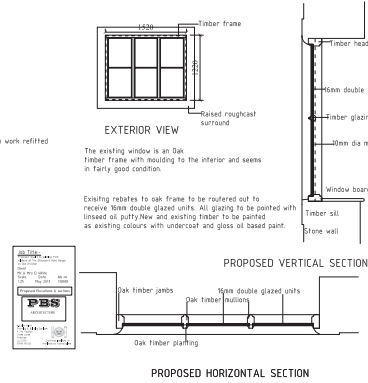

SECTION WINDOW 1 15

SECTION WINDOWS 2 & 3 THRO FRAME 15


SECTION WINDOW 2 & 3 THRO SASH 15

SECTION WINDOW 4 15

SECTION WINDOW 2 & 3 15

SECTION WINDOW 4 15

The existing oak frames will remain, the existing rebates will be deepened by 20mm to accept the double glazed units to the fixed sides of each window.
A profile of oak timber 20mm x 20mm PAK will be fitted to the exterior of the existing 2 metre centre opening sash on windows 2 & 3 to form a deeper rebate to take the 16mm double glazed unit, and secured with linseed oil putty. All existing ironwork to the sashes will remain as at present.

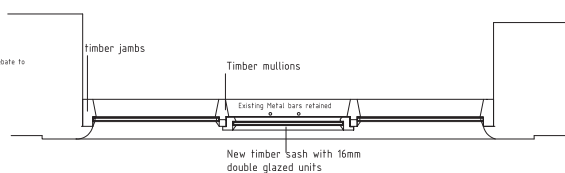

Job Title:-
Proposed repairs to existing front windows at The Stableyard Hotel Banger on Dee Wrexham
Client
Mr & Mrs D White
Scale 1:50
Date May 2013
Job no 130508/4

Proposed Elevations & sections

PBS
ARCHITECTURE

B.Smith HCAT
Planning & Building Services
9 The Padlocks
Cross Lanes
Wrexham
LL13 0TX
01978 781333
Chartered Institute of
Architectural Technologists