


Metres
0 1 2 3 4 5 10 15 20
SCALE 1:250

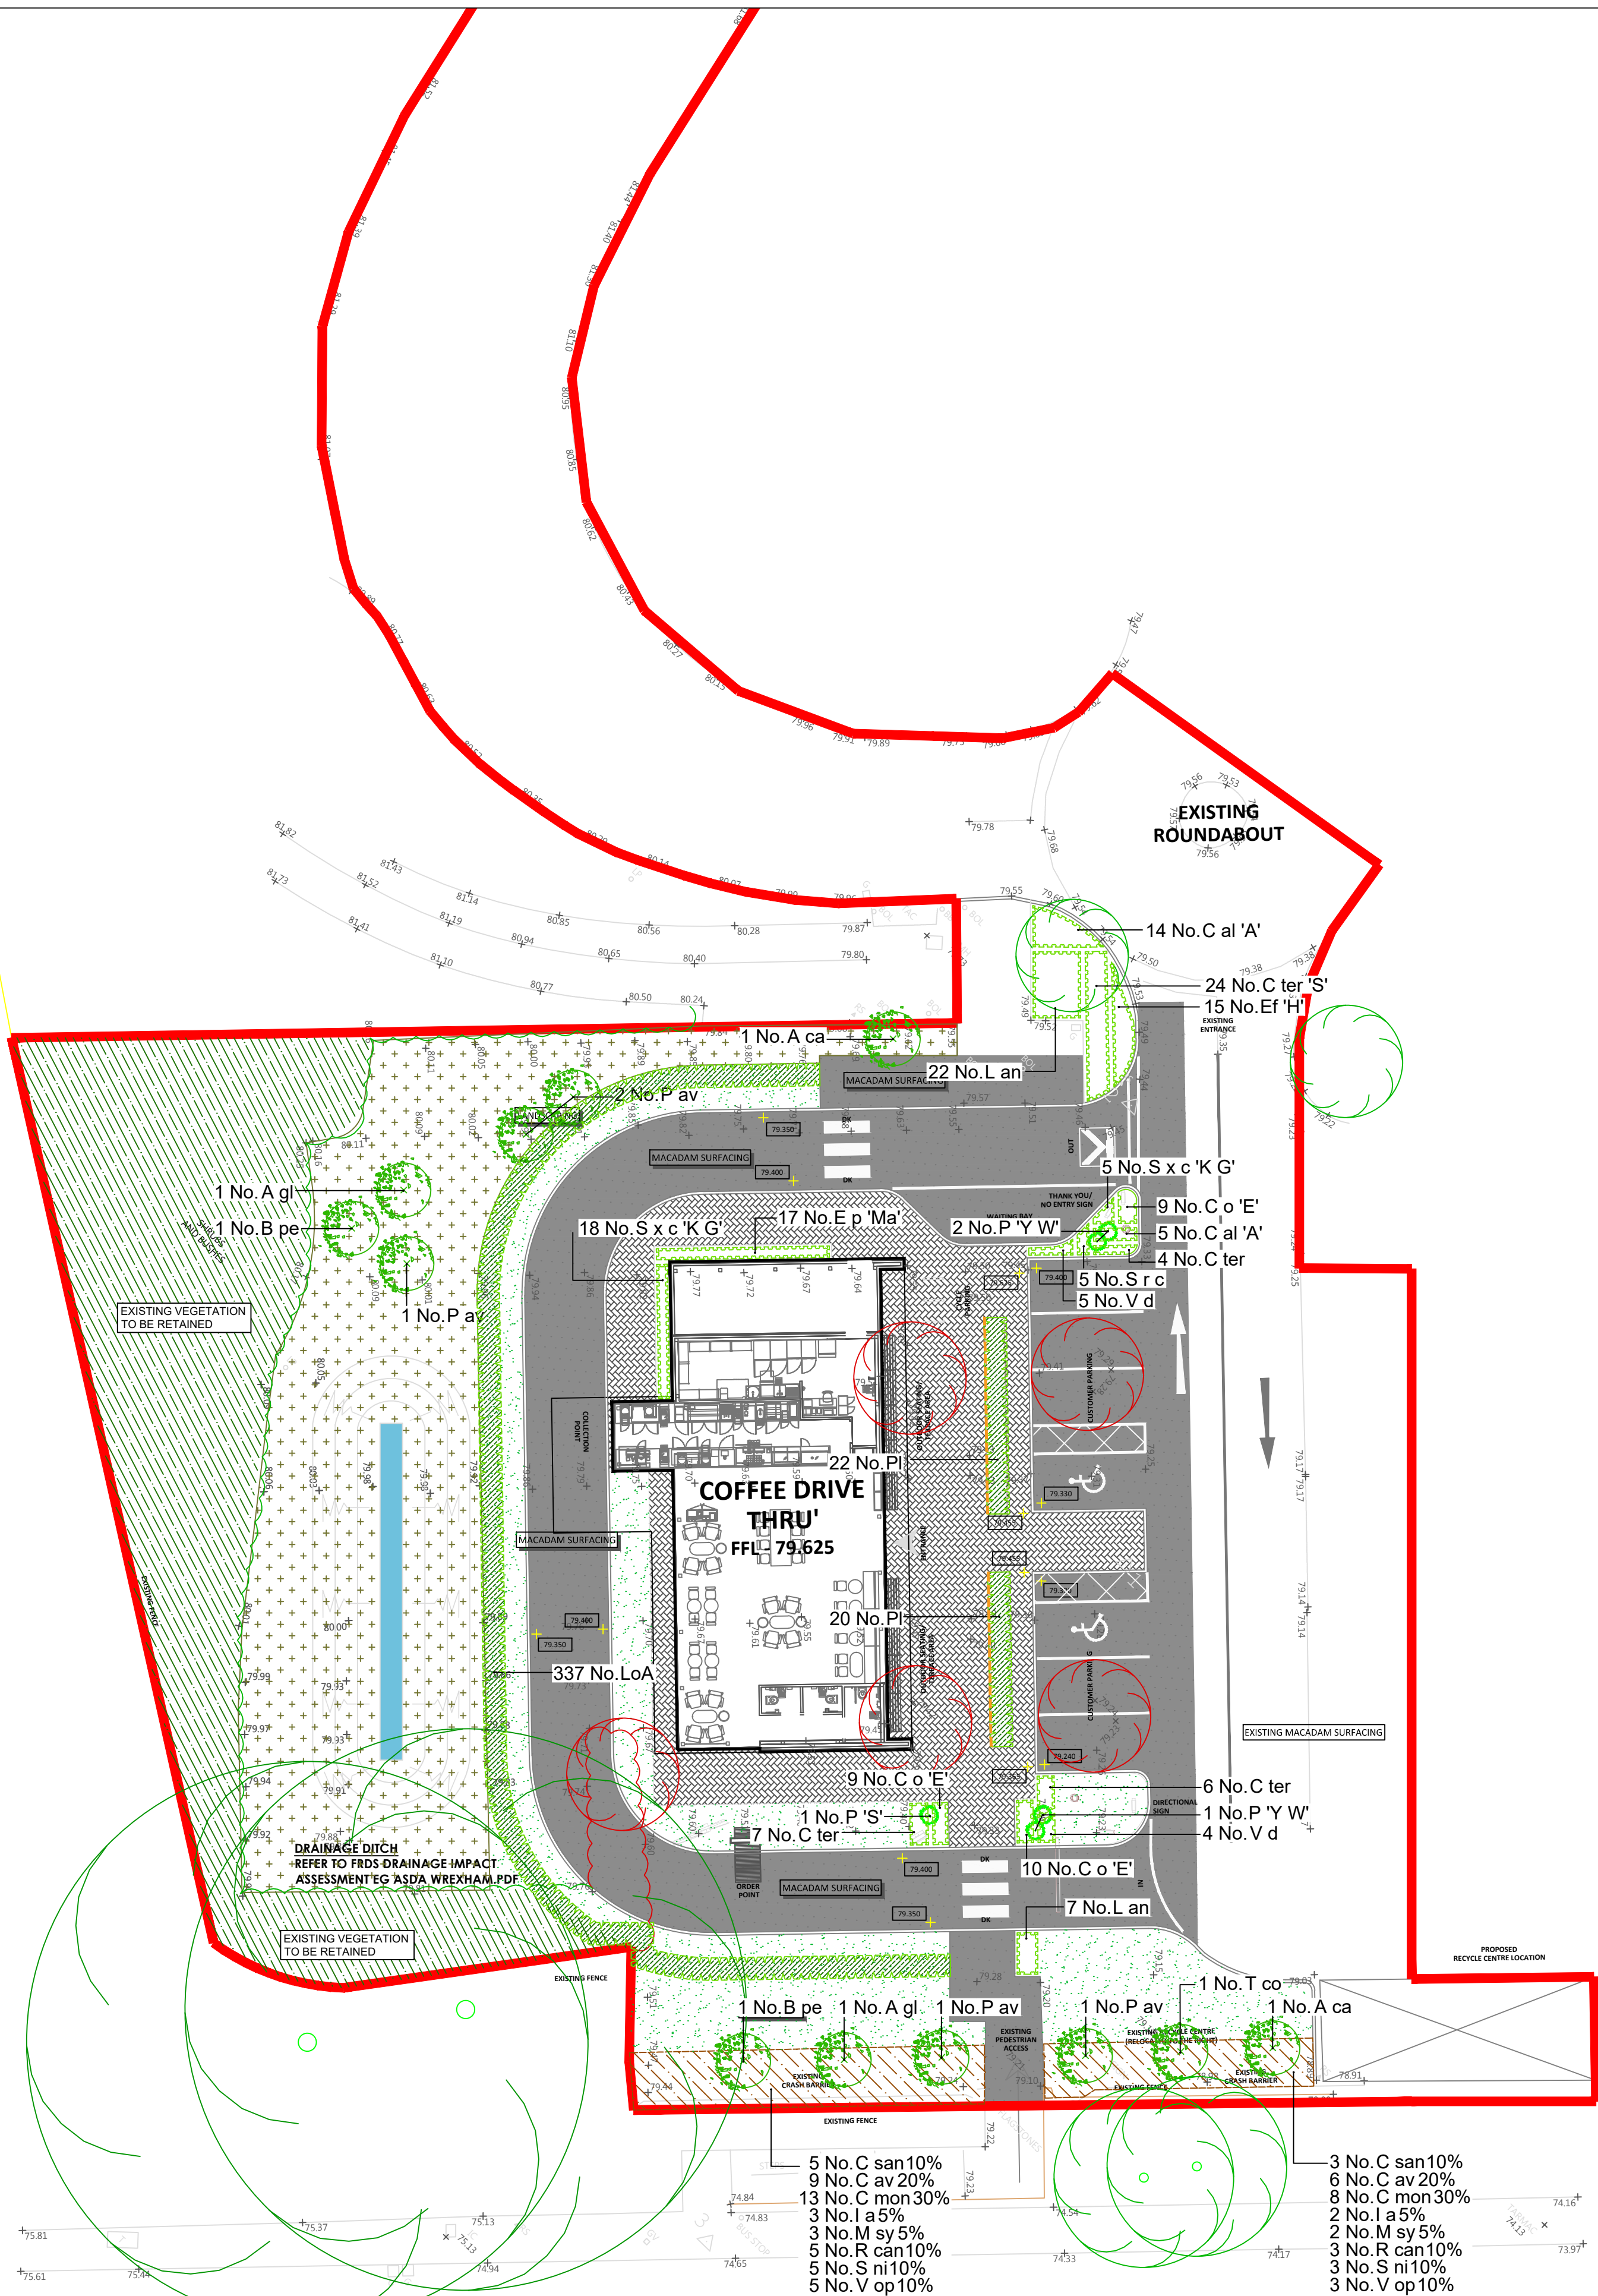

Plant Schedule						
Shrubs						
Abb	Species	Pot	Size	Density	Total	
C o 'E'	Carex oshimensis 'Evergold'	2L		5/m²	28 No.	
C ter	Choisya ternata	3L	30-40cm	3/m²	17 No.	
C ter 'S'	Choisya ternata 'Sundance'	3L	30-40cm	3/m²	24 No.	
C al 'A'	Cornus alba 'Aurea'	3L	40-60cm	3/m²	19 No.	
E p 'Ma'	Elaeagnus pungens 'Maculata'	3L	30-40cm	3/m²	17 No.	
EF 'H'	Euonymus fortunei 'Harlequin'	3L	20-30cm	3/m²	15 No.	
L an	Lavandula angustifolia	3L	20-30cm	3/m²	29 No.	
P 'Y W'	Phormium 'Yellow Wave'	10L	40-60cm	No.	1 No.	
S r c	Sarcococca ruscifolia chinensis	2L	20-30cm	4/m²	5 No.	
S x c 'K G'	Skimmia x confusa 'Kew Green'	3L	30-40cm	4/m²	23 No.	
V d	Viburnum davidii	3L	20-30cm	3/m²	9 No.	

Native Ornamental Hedgerow					
Abb	Species	Pot	Size	Density	Total
LoA	Ligustrum ovalifolium 'Aureum'	Bushy :7/10 brks :BR	125-150cm	5/m	337 No.
Pl	Prunus lusitanica	Bushy :6 brks :C	125-150cm	2.5/m	42 No.

Native Shrub Mix - Planted at 1m centres and to be protected with spiral-bound shrub guards					
Abb	Species	Pot	Size	Density	Total
C san	Cornus sanguinea	I+1: Transplant - seed raised: Branched: 3 brks: B	60-80cm	10%	8 No.
C av	Corylus avellana	I+2: Transplant - seed raised: Branched: 3 brks: B	60-80cm	20%	15 No.
C mon	Crataegus monogyna	I+1: Transplant - seed raised: B	60-80cm	30%	21 No.
I a	Ilex aquifolium	Leader with Laterals: C	30-40cm	5%	5 No.
M sy	Malus sylvestris	I+1: Transplant - seed raised: B	60-80cm	5%	5 No.
R can	Rosa canina	I+1: Transplant - seed raised: Branched: 3 brks: B	60-80cm	10%	8 No.
S ni	Sambucus nigra	I+1: Transplant - seed raised: Branched: 3 brks: B	60-80cm	10%	8 No.
V op	Viburnum opulus	I+2: Transplant - seed raised: Branched: 3 brks: B	60-80cm	10%	8 No.

Trees				
Abb	Species	Girth	Spec	Total
A ca	Acer campestre	12-14cm	Heavy Standard: 5 brks: 3x: RB: Clear Stem min. 200cm	2 No.
A gl	Alnus glutinosa	12-14cm	Heavy Standard: 5 brks: 3x: RB: Clear Stem min. 200cm	2 No.
B pe	Betula pendula	12-14cm	Heavy Standard: 5 brks: 3x: RB: Clear Stem 175-200cm	2 No.
P av	Prunus avium	12-14cm	Heavy Standard: 5 brks: 3x: RB: Clear Stem 175-200cm	5 No.
T co	Tilia cordata	12-14cm	Heavy Standard: 5 brks: 3x: RB: Clear Stem 175-200cm	1 No.


Planting Notes

- Tree procurement, planting and management shall be in accordance with BS 8545:2014 Trees: from Nursery to Independence in the landscape- Recommendations.
- All other plants shall be handled in accordance with 'Plant Handling', the booklet published by the Committee for Plant Supply and Establishment (CPSE). The contractor shall comply with clauses 3 & 4 of the above booklet (obtained from the Horticulture Trades Association, 19 High Street, Theale, Reading, Berks RG7 5H) which refers to the receipt, unloading and temporary storage of plants.
- Plants shall be first class examples of their species or variety, free from all pests and diseases, with good fibrous root systems and materially undamaged (refer to relevant sections of BS3936 Parts 1-4 'Specification of Nursery Stock').
- All planting is to be in general compliance with BS4428: 1989 'Code of Practice for general landscape operations (excluding hard surfaces)'.
- Shrub beds to have a min depth of 450mm good quality topsoil, beds should be cultivated prior to planting and be free from weeds or any stones/ rubble material greater than 50mm
- Wildflower meadow - Remove unwanted weeds and vegetation from area to be sown. Prepare ground and spray with a glyphosate based weed killer in line with manufacturers recommendations. Sow EM3 seed mix from Emorsgate at a rate of 4g per square metre.
- All BR whips and BR stock (proposed hedgerow) to be protected with a spiral bound tree-shrub guard and secured into place with a cane. Ensure that the areas around the base of the shrubs are maintained weed free during the establishment period using a glyphosate based herbicide. BR stock should be notch planted and heeled securely into position.
- Heavy standard and multi-stem trees are to be double-staked using short stakes (at 600mm above ground level) and secured with a cross bar and rubber webbing tie and spacer. Standards are to be single-staked and secured with a rubber webbing tie and spacer.
- For the ornamental trees; One number 80 litre bag of tree planting compost (non-peat based) is to be incorporated into tree pits. Compost must be mixed thoroughly with topsoil. Trees shall be planted in tree pits of the following minimum size (or large enough to comfortably accommodate the root ball, whichever is the largest):


Heavy standard 1000x1000x750mm deep
- The contractor must ascertain for himself/herself the exact location of underground services and maintenance points.
- All areas of ornamental planting are to be mulched to a depth of 50mm with medium grade tree bark.
- The grassed areas will be seeded with a low growing species rich grass mix (unless otherwise advised by the client).
- Water all plants and trees on the same day of planting and there after as necessary (min once a week in periods of drought) to ensure the establishment of the plants during the 12months defects period.

LEGEND

Soft Landscaping




Existing trees and vegetation to be retained and protected in line with BS5837:2012




Existing trees and vegetation to be removed




Proposed Trees planted as heavy standard 12-14cm girth




Proposed Native Shrub mix planted as BR at 1metre centres in single species groups of 3-5no.



Proposed Shrub beds planted 3-5L containers 3-4 per sq.m



Proposed Feature plants to be planted as 20L specimens




Proposed Wildflower Meadow Mix EM3 special general purpose meadow mixture supplied by Emorsgate. www.wildseed.co.uk



Proposed grass areas



Proposed Native Ornamental Hedgerow To be planted at 2.5 / 5 per m and maintained at 120-150cm high



Proposed Timber Post and Rail Fencing to rear of hedge

REV D Added hedge to grass verge AH 19/08/2020
REV C Added hedges to frontage AH 18/08/2020
REV B Updated in line with revised layout TC 25/03/2020
REV A Drainage ditch added EB 12/02/2020



DEP LANDSCAPE ARCHITECTURE LTD

2 COMMERCIAL STREET, MANCHESTER M15 4RQ

T: 0161 2419878
W: www.dep.co.uk

Client
Euro Garages Ltd.

Project
Holt Road, Wrexham

Description
Landscape Layout

Status
Planning

Scale
1:200@A1

Drawn
EB (TR)

Job number
4377

Drawing number
01

Date
Jan 20

Revision
D

Copyright DEP Landscape Architecture Ltd

All levels and dimensions to be checked on site by contractor prior to commencement; Any variations to be reported to the client. This drawing is to be read in conjunction with all others relating to the project and all information derived accordingly; any anomalies to be reported to the client. Do not scale from this drawing. Use figured dimensions only. Work shown on this drawings to be carried out in accordance with current British Standards and Codes of Practice.

© Copyright to DEP Landscape Architecture Limited. The information shown on this drawing shall not be reproduced or copied in any form without prior written consent from DEP Landscape Architecture Limited.