


ROOFLIGHTS

CONSERVATION ROOFLIGHTS TO BE SUPPLIED BY THE ROOFLIGHT COMPANY, PRODUCT I.D. CR-08, 415 X 675MM, AND TO BE INSTALLED BETWEEN THE RAFTERS FOR FLUSH FINISH ALONG ROOFLINE. SPECIFICATION DOCUMENTS INCLUDED IN DESIGN ACCESS STATEMENT, APPENDIX C.

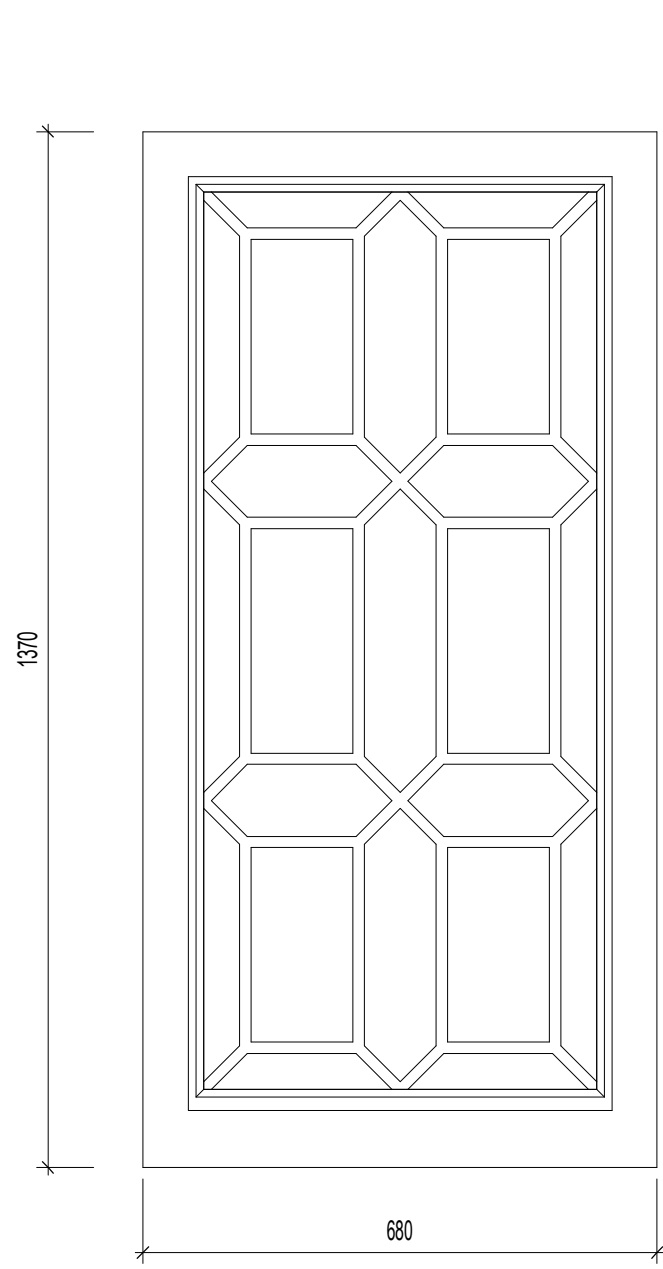


W01, W10, W11

ORIGINAL - TO BE RETAINED AND REPAIRED

TIMBER FRAME WITH CAST IRON GLAZING BARS IN LOZENGE PATTERN


REPLACEMENT GLASS PANES TO BE SLIMLINE DOUBLE GLAZING AND FITTED ACCORDING TO CONSERVATION REPAIR GUIDANCE IN DESIGN ACCESS STATEMENT. EXISTING GLASS RETAINED.

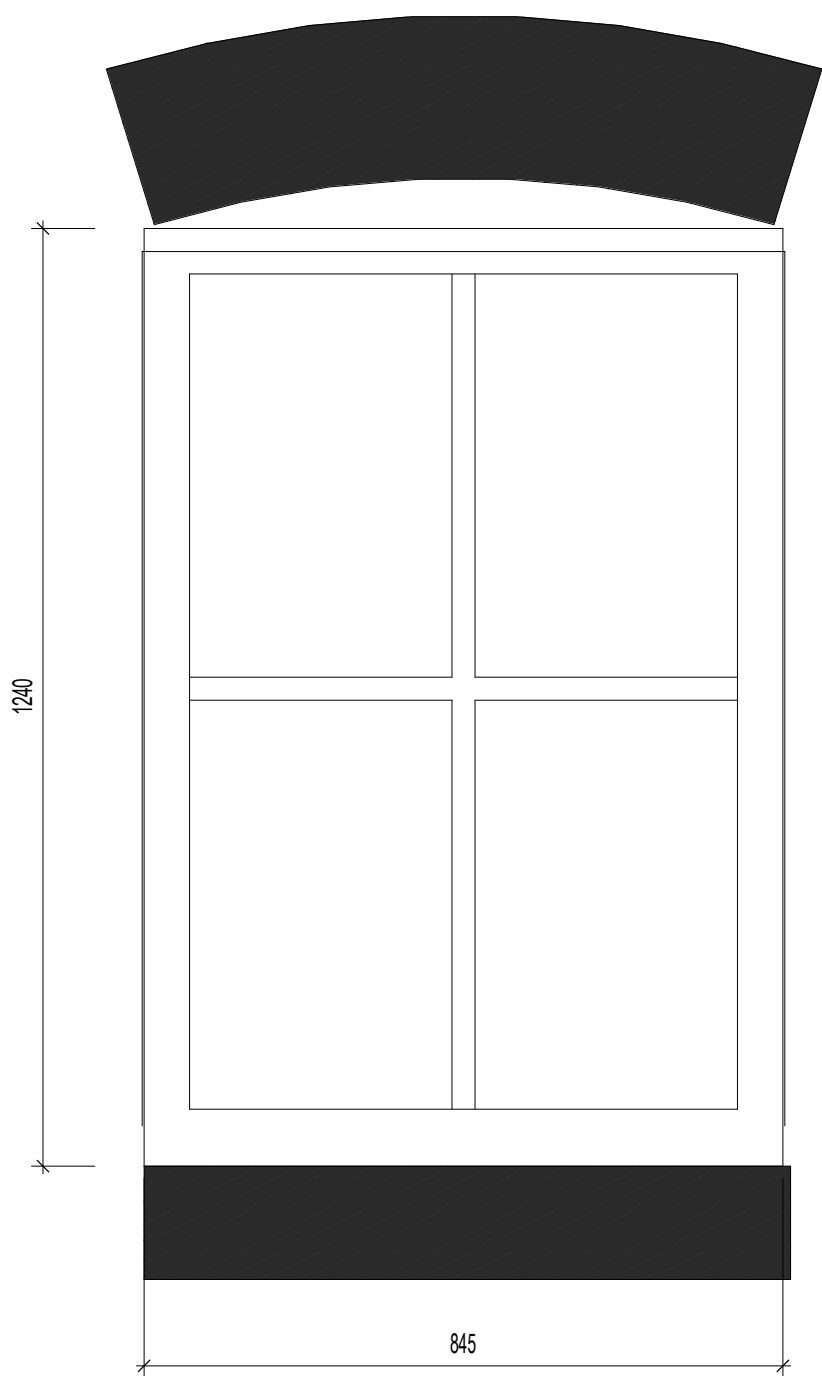

W02

ORIGINAL - TO BE RETAINED


TIMBER FRAME, SOLID TIMBER GLAZING BARS

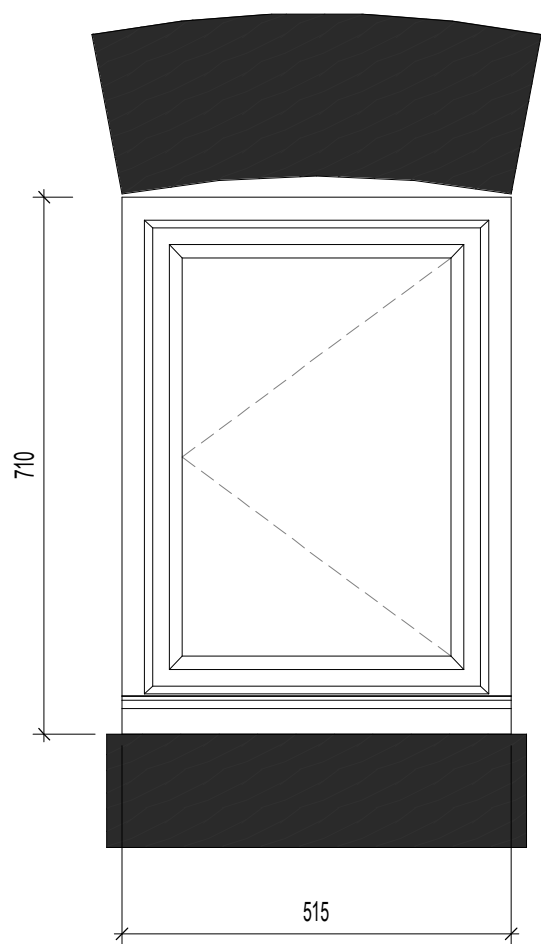

W03

ORIGINAL - TO BE RETAINED

TIMBER FRAME

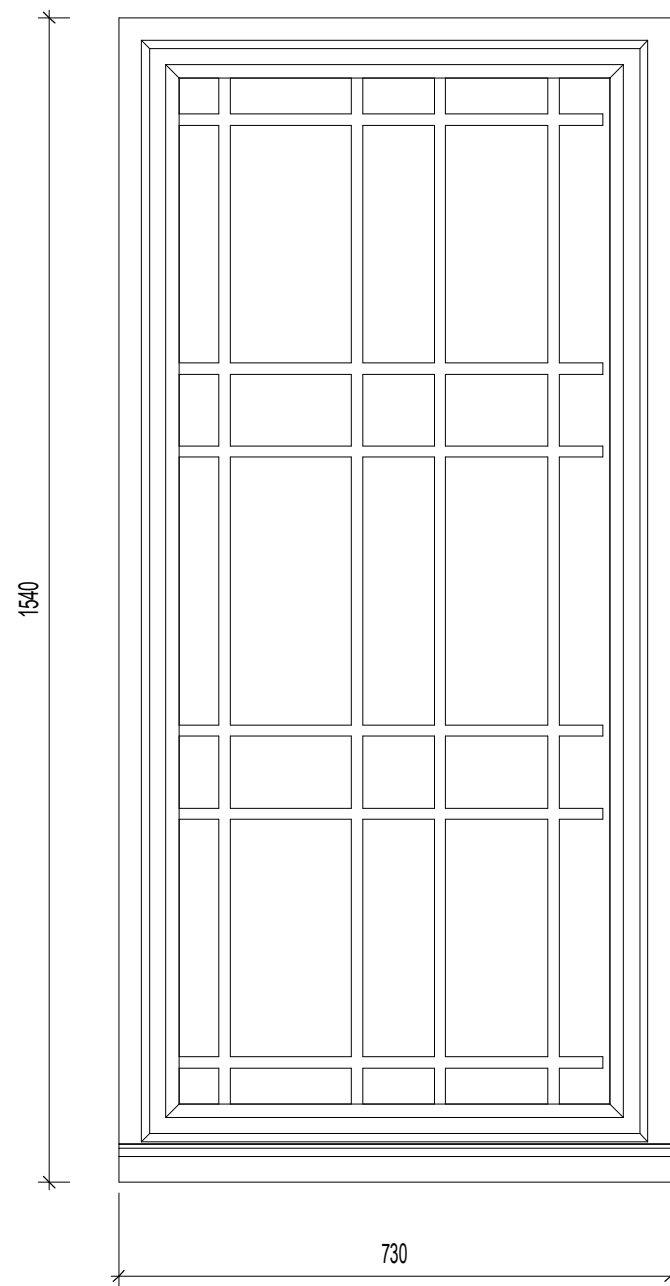


W04, W05, W06, W07

NEW - CUSTOM DESIGNED

TIMBER FRAME, SOLID TIMBER BARS IN CUSTOM PATTERN

DOUBLE GLAZED

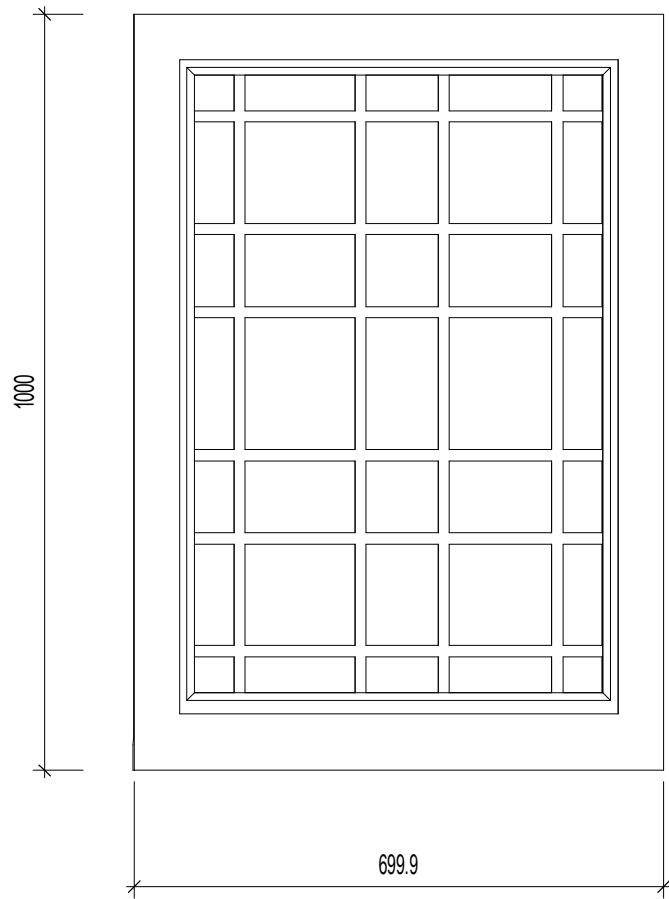


W08, W09

NEW - CUSTOM DESIGNED

TIMBER FRAME, SOLID TIMBER BARS IN CUSTOM PATTERN

DOUBLE GLAZED

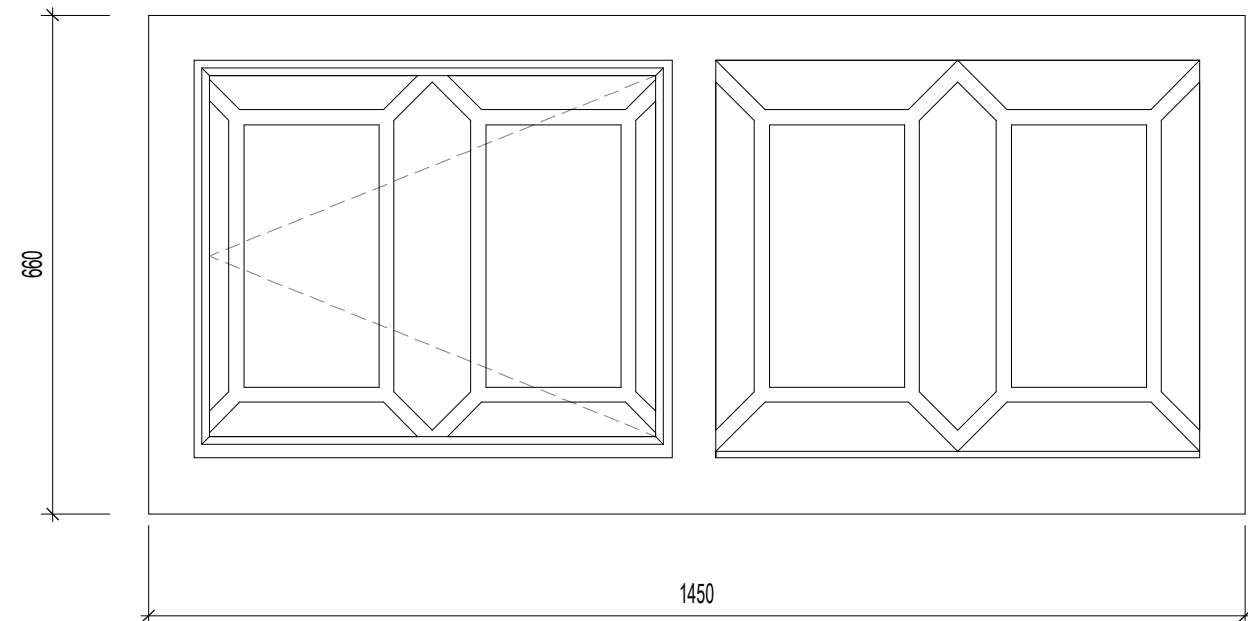


W101, W110

ORIGINAL - TO BE RETAINED AND REPAIRED

TIMBER FRAME WITH CAST IRON GLAZING BARS IN LOZENGE PATTERN, IN W08 BARS TO BE FABRICATED TO MATCH AND REINSTATE PATTERN.

REPLACEMENT GLASS PANES TO BE SLIMLINE DOUBLE GLAZING AND FITTED ACCORDING TO CONSERVATION REPAIR GUIDANCE IN DESIGN ACCESS STATEMENT. EXISTING GLASS RETAINED.

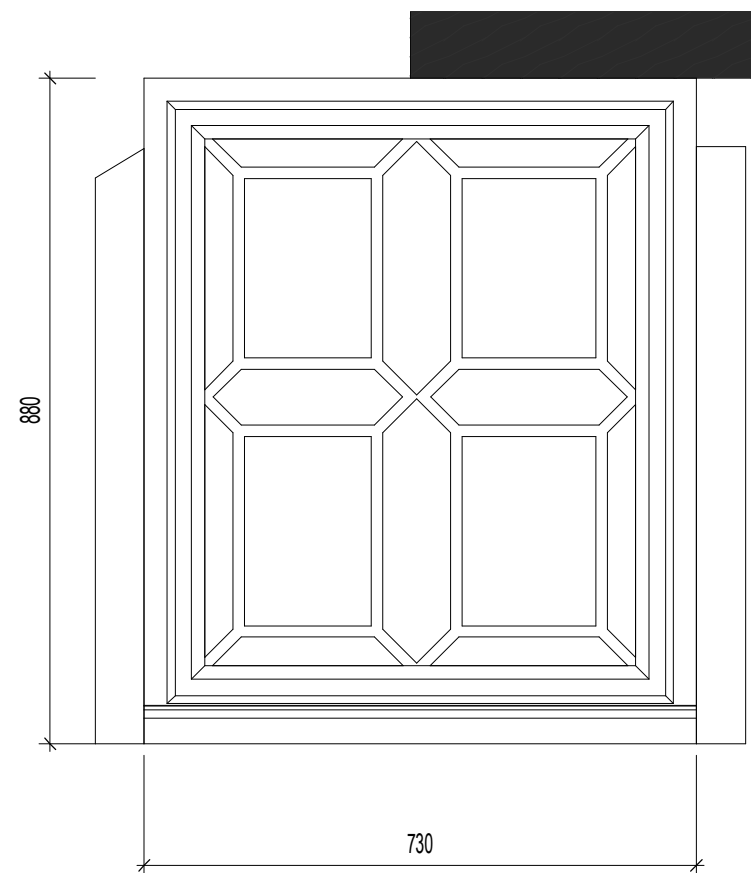


W102

NEW - CUSTOM DESIGNED

TIMBER FRAME, BARS TO BE FABRICATED TO MATCH AND REINSTATE PATTERN OF ORIGINAL.

REPLACEMENT GLASS PANES TO BE SLIMLINE DOUBLE GLAZING AND FITTED ACCORDING TO CONSERVATION REPAIR GUIDANCE IN DESIGN ACCESS STATEMENT.

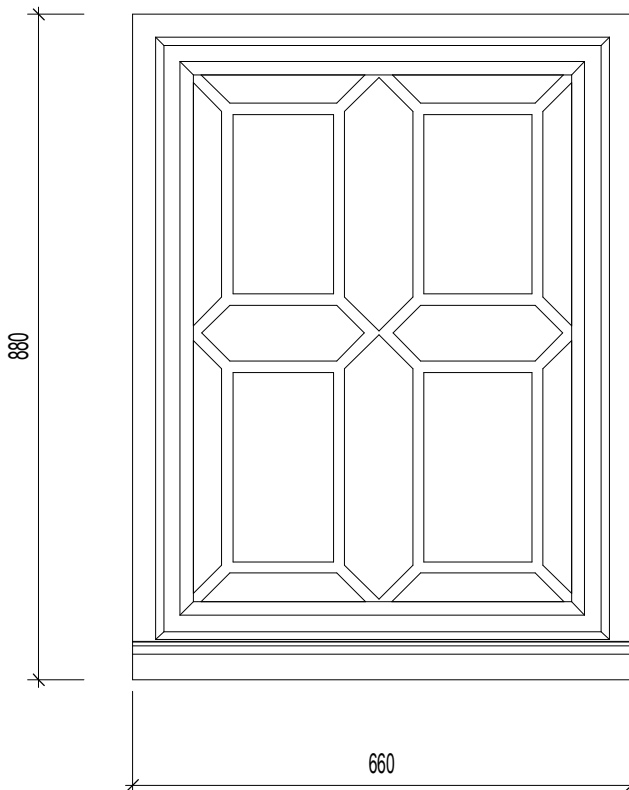


W103

NEW - CUSTOM DESIGNED

TIMBER FRAME, BARS TO BE FABRICATED TO MATCH AND REINSTATE PATTERN OF ORIGINAL.

REPLACEMENT GLASS PANES TO BE SLIMLINE DOUBLE GLAZING AND FITTED ACCORDING TO CONSERVATION REPAIR GUIDANCE IN DESIGN ACCESS STATEMENT.

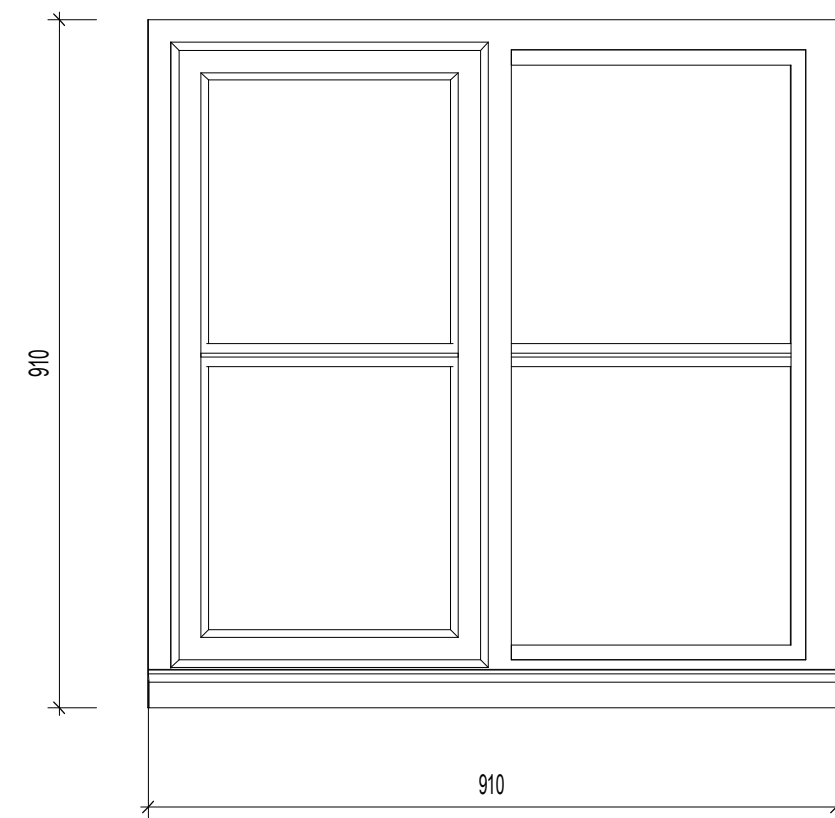


W104, W105, W106, W107

NEW - DESIGNED TO REPLACE EXISTING LIKE-FOR-LIKE

TIMBER FRAME CASEMENT WINDOW WITH SOLID TIMBER GLAZING BAR.


DOUBLE GLAZED

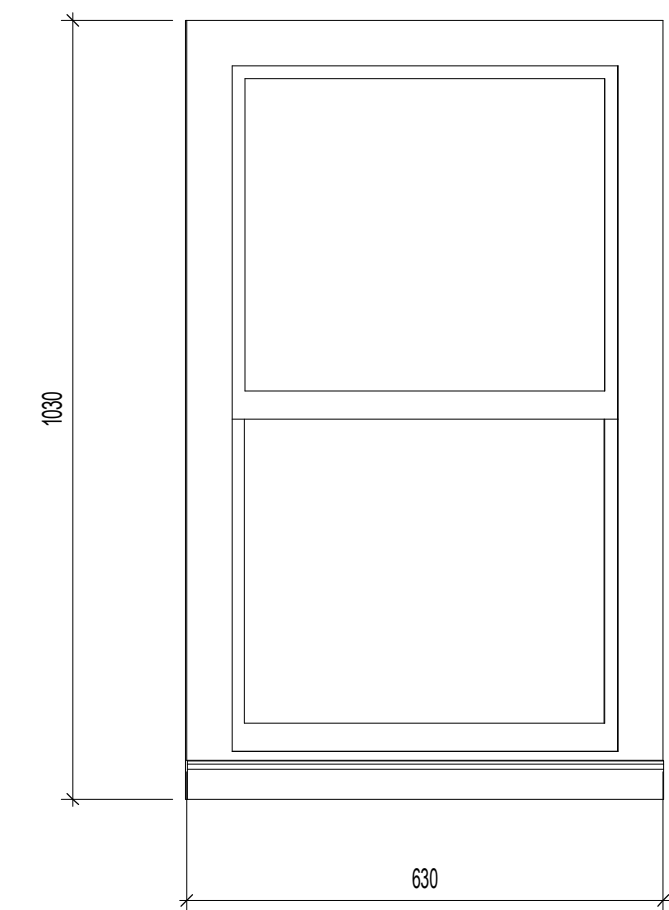

W109

ORIGINAL - TO BE RETAINED

TIMBER FRAME

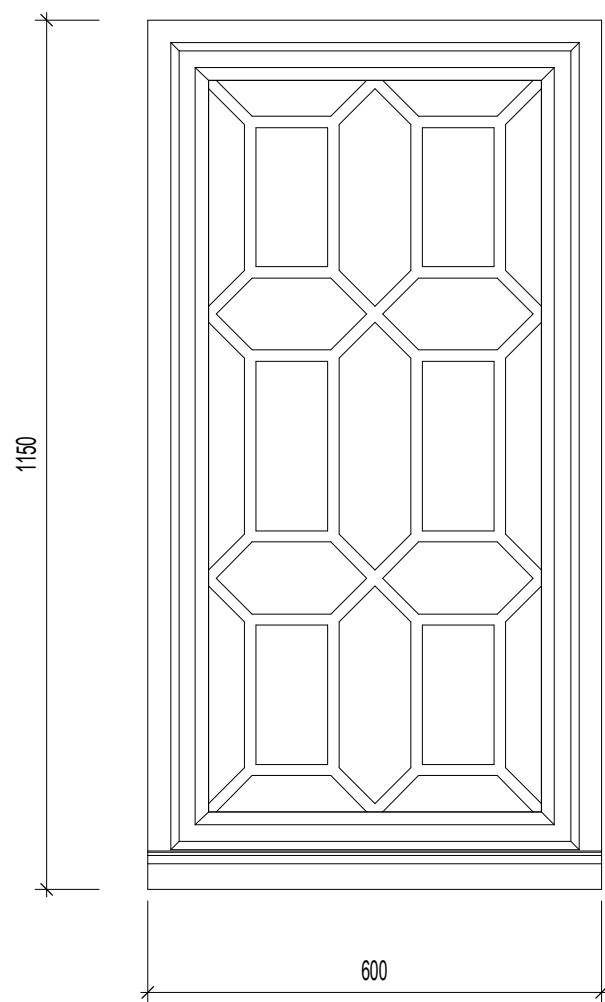

W108


ORIGINAL - TO BE REPAIRED IF POSSIBLE

CAST IRON GLAZING BARS IN LOZENGE PATTERN SET DIRECTLY IN BRICK WALL. GLAZING AND FRAME MISSING. SECONDARY GLAZING INSTALLED TO INTERIOR SIDE.

REPLACEMENT GLASS PANES TO BE SLIMLINE DOUBLE GLAZING AND FITTED ACCORDING TO CONSERVATION REPAIR GUIDANCE IN DESIGN ACCESS STATEMENT. EXISTING GLASS RETAINED.

IN THE CASE OF REPAIR NOT POSSIBLE, CAST IRON GLAZING BARS WILL BE RE-POSITIONED WITHIN NEW WALL WITH NEW TIMBER FRAMED PLAIN DOUBLE GLAZED WINDOW TO INTERIOR, AS EXISTING.

W001,
NEW - TO BE FABRICATED TO FIT ARCHED
OPENING.
TIMBER FRAMED AND DOUBLE GLAZED .

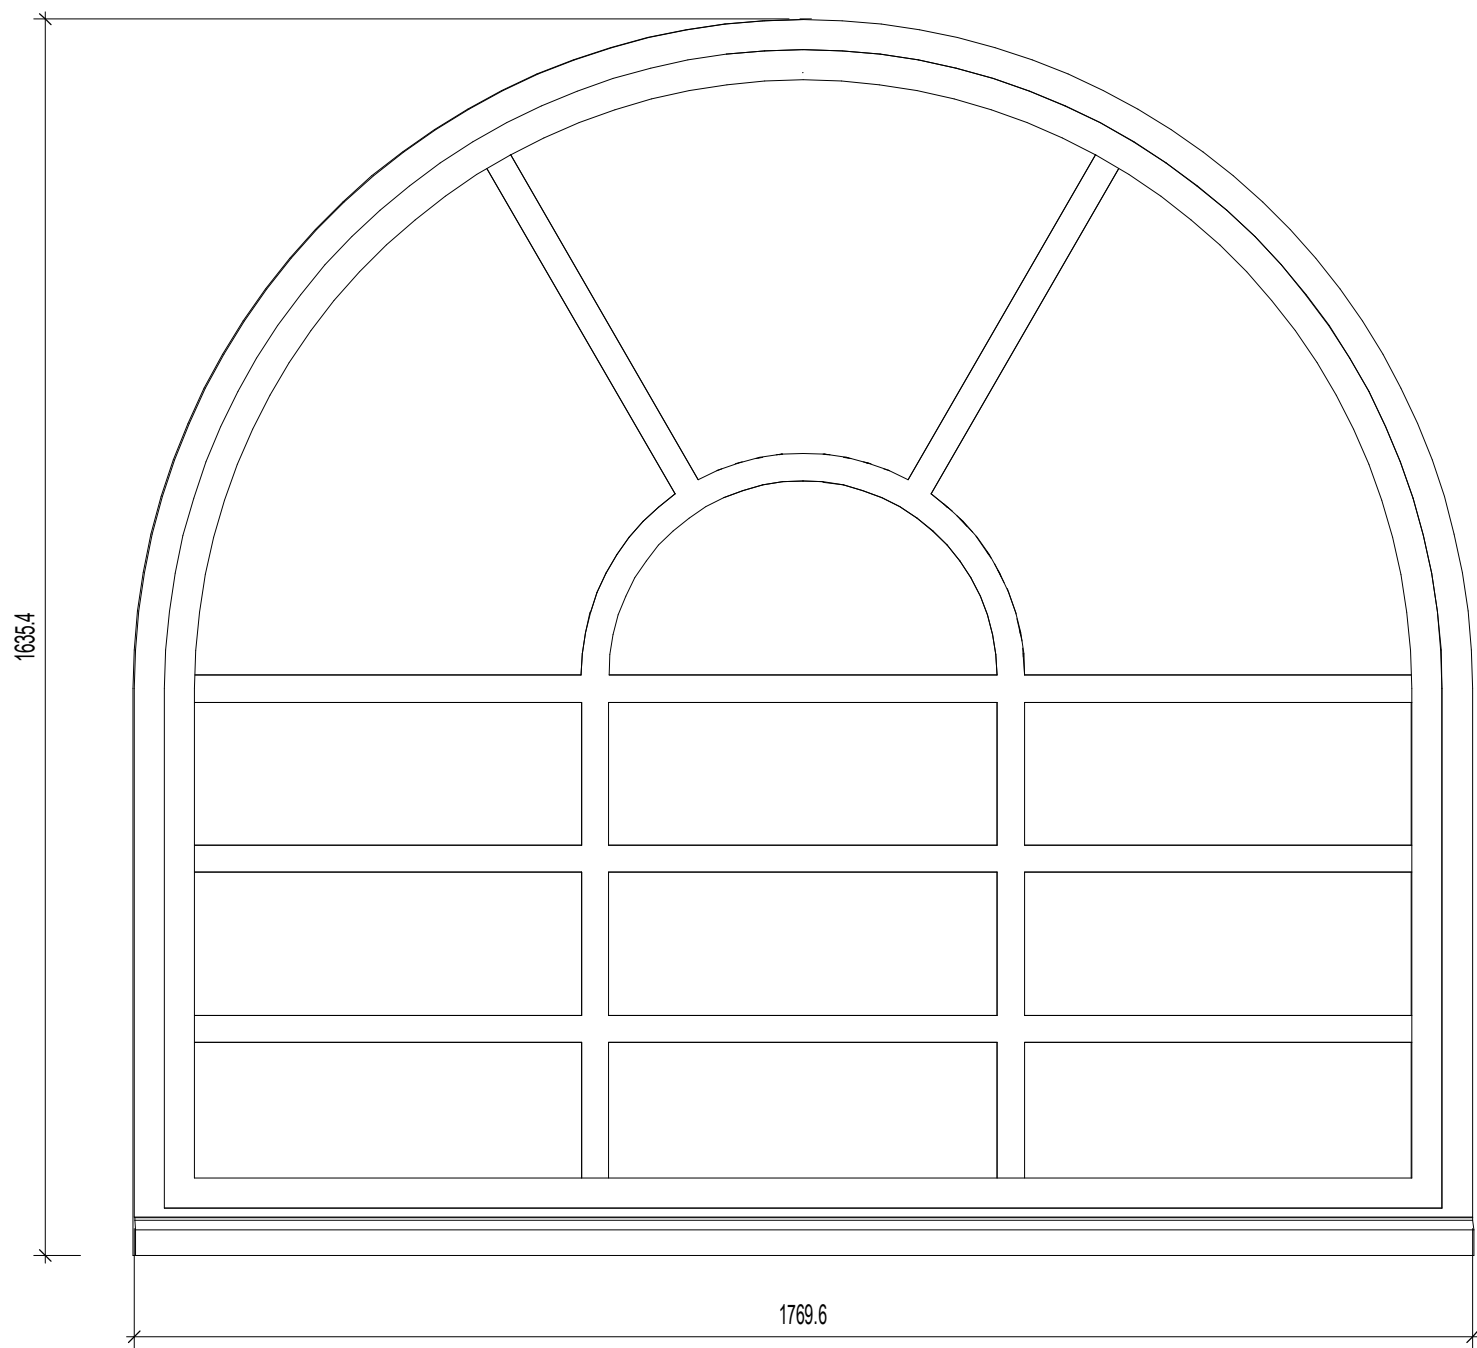

REV.	DESCRIPTION	[DRAWN BY]	[CHECKED BY]	[APPROVED BY]	DATE
RIBA PLAN OF WORK 2013 WORKSTAGE	LEVEL OF MODEL DEFINITION (LoD)				
Stage 3 - Developed Design	LoD 4 - Presee Model				
PURPOSE OF ISSUE - SUITABLE FOR ...	BS1192 STATUS				
Planning Submission	Status A - Approved				