


Object :
 Installation :
 Project number : 17-818
 Date : 20.11.2018

Exterior 1

Summary, Exterior 1

Result overview, Evaluation area 1

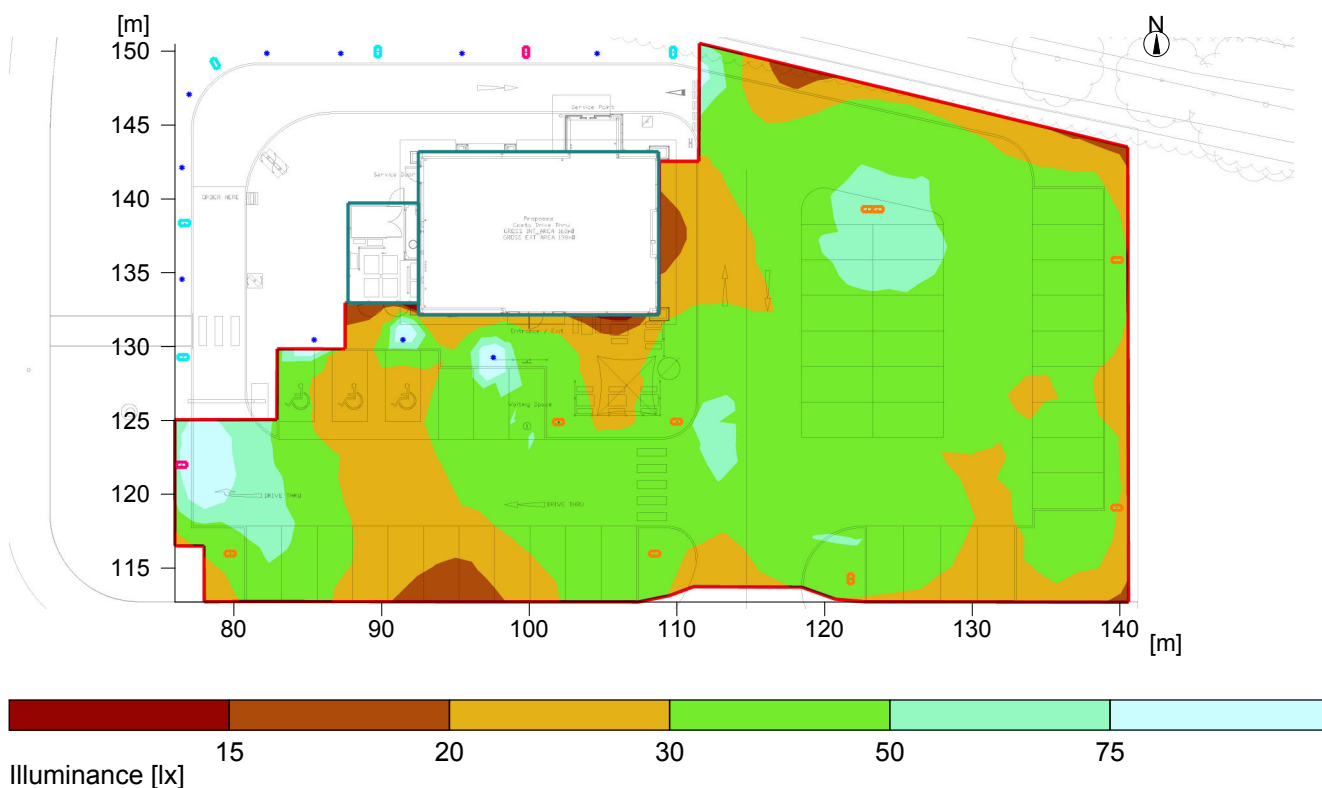

General

Calculation algorithm used
 Maintenance factor

Average indirect fraction
 0.80

Total luminous flux of all lamps
 Total power
 Total power per area (1637.24 m²)

116353 lm
 1073.4 W
 0.66 W/m² (1.76 W/m²/100lx)

Evaluation area 1

Reference plane 1.1

Horizontal
 Em 37.2 lx
 Emin 18 lx
 Emin/Eav (Uo) 0.48
 Emin/Emax (Ud) 0.18
 Position 0.00 m


Type No. \ Make

Whitecroft Lighting

1 2

 Order No. : BLF3614KG
 Luminaire name : Broadwalk L360
 Equipment : 1 x LED / 484 lm

Low Carbon Lighting

2 9

 Order No. : Quantum Pro XTE HE 110487640T4.Idt
 Luminaire name : Quantum Pro XTE HE 110487640T4
 Equipment : 1 x Quantum Pro XTE HE 110487640T4 / 11990 lm

Object :
Installation :
Project number : 17-818
Date : 20.11.2018



Exterior 1

Summary, Exterior 1

Result overview, Evaluation area 1

3	1	Order No.	: Quantum Pro XTE HE 65249040T4.Idt
		Luminaire name	: Quantum Pro XTE HE 65249040T4
		Equipment	: 1 x Quantum Pro XTE HE 65249040T4 / 7475 lm