

Planting Schedule					
Shrubs					
Abb	Species	Pot	Size	Density	Total
Av	Arundinaria variegata	5L	40-60cm	4/m ²	113 No.
CtS	Choisya ternata 'Sundance'	3L	30-40cm	3/m ²	67 No.
EpM	Elaeagnus pungens 'Maculata'	5-7.5L	30-40cm	4/m ²	121 No.
Hr	Hebe rakaiensis	5L	20-30cm	4/m ²	144 No.
LaV	Lavandula angustifolia 'Vera'	5L	20-30cm	4/m ²	91 No.
MsG	Miscanthus sinensis 'Gracillimus'	5-7.5L	20-30cm	4/m ²	100 No.
SKG	Skimmia confusa 'Kew Green'	3L	20-30cm	4/m ²	92 No.
Vd	Viburnum davidii	5-7.5L	20-30cm	4/m ²	147 No.

Ornamental Hedge Planting					
Abb	Species	Pot	Size	Density	Total
Cb	Carpinus betulus	BR	1.2-1.5 m	5/m	398 No.

Native Hedgerow Mix - Planted in a staggered row at 6 per lin.m and to be protected with spiral bound shrub guards

Abb	Species	Pot	Size	Density	Total
Cav	Corylus avellana	BR	6/m	6/m	211 No.
Cmo	Crataegus monogyna	BR	6/m	6/m	524 No.
la	Ilex aquifolium	2L	6/m	6/m	54 No.
PRUSP	Prunus spinosa	BR	6/m	6/m	106 No.
Rca	Rosa canina	BR	6/m	6/m	54 No.
VIBOP	Viburnum opulus	BR	6/m	6/m	106 No.

Native Shrub Mix - Planted at 1m centres and to be protected with spiral bound shrub guards

Abb	Species	Pot	Size	Density	Total
CORSA	Cornus sanguinea	BR	60-80cm	10%	71 No.
Cav	Corylus avellana	BR	60-80cm	20%	141 No.
Cmo	Crataegus monogyna	BR	60-80cm	30%	212 No.
la	Ilex aquifolium	2L	40-60cm	5%	36 No.
MALSY	Malus sylvestris	BR	60-80cm	5%	36 No.
Rca	Rosa canina	BR	60-80cm	10%	71 No.
SAMNI	Sambucus nigra	BR	60-80cm	10%	71 No.
VIBOP	Viburnum opulus	BR	60-80cm	10%	71 No.



Trees				
Abb	Species	Spec	Height	Total
Ac	Acer campestre	8-10cm	Standard	6 No.
AcE	Acer campestre 'Elsrijk'	12-14cm	Heavy Standard	6 No.
Ag	Alnus glutinosa	8-10cm	Standard	2 No.
Bp	Betula pendula	8-10cm	Standard	4 No.
Bp	Betula pendula	12-14cm	Heavy Standard	6 No.
Bj	Betula utilis jacquemontii	Multi-Stemmed	Multi-Stemmed	12 No.
CbFF	Carpinus betulus 'Frans Fontaine'	12-14cm	Heavy Standard	6 No.
Pa	Prunus avium	8-10cm	Standard	5 No.
Qr	Quercus robur	8-10cm	Standard	11 No.
Tc	Tilia cordata	8-10cm	Standard	8 No.
TcGS	Tilia cordata 'Green Spire'	12-14cm	Heavy Standard	9 No.

NOTE: All trees except multi-stem are to be supplied with min 2m clear stem.


PLANTING NOTES:

1. Tree procurement, planting and management shall be in accordance with BS 8545:2014 Trees: from Nursery to Independence in the landscape- Recommendations.
All other plants shall be handled in accordance with 'Plant Handling', the booklet published by the Committee for Plant Supply and Establishment (CPSE). The contractor shall comply with clauses 3 & 4 of the above booklet (obtained from the Horticulture Trades Association, 19 High Street, Theale, Reading, Berks RG7 5H) which refers to the receipt, unloading and temporary storage of plants.
2. Plants shall be first class examples of their species or variety, free from all pests and diseases, with good fibrous root systems and materially undamaged (refer to relevant sections of BS3936 Parts 1-4 'Specification of Nursery Stock').
3. All planting is to be in general compliance with BS4428: 1989 'Code of Practice for general landscape operations (excluding hard surfaces).'
4. Shrub beds to have a min depth of 450mm good quality topsoil, beds should be cultivated prior to planting and be free from weeds or any stones/ rubble material greater than 50mm.
5. Wildflower meadow - Remove unwanted weeds and vegetation from area to be sown. Prepare ground and spray with a glyphosate based weed killer inline with manufacturers recommendations. Sow EM3 seed mix from Emorsgate at a rate of 4g per square metre.
6. All BR Whips and BR stock (proposed native hedge & ornamental hedge) to be protected with a spiral bound tree-shrub guard and secured into place with a cane. Ensure that the areas around the base of the shrubs are maintained weed free during the establishment period using a glyphosate based herbicide. BR stock should be notch planted and healed securely to firm into position.
7. All trees are to be staked and secured as follows:
i) Heavy standard and standard trees are to be double staked using short stakes (at 600mm above ground level) and secured with a cross bar and rubber webbing tie and spacer.
ii) Multi-stemmed trees are to be secured with underground guy anchor secured into place with min 3no. stakes under the rootball.
8. For the ornamental trees ; One number 80 litre bag of tree planting compost (non-peat based) is to be incorporated into tree pits.
Compost must be mixed thoroughly with topsoil. Trees shall be planted in tree pits of the following minimum sizes (or large enough to comfortably accommodate the root ball, whichever is the largest):

Heavy standard and Multi-stemmed	1000x1000x750mm deep
Standard	800x800x650mm deep
9. The contractor must ascertain for himself/herself the exact location of underground services and maintenance points.
10. All areas of ornamental planting are to be mulched to a depth of 50mm with medium grade tree bark.
11. It is presumed that the grassed areas will be seeded with a general amenity grass mix (unless otherwise advised by the client).
12. Water all plants and trees on the same day of planting and there after as necessary (min once a week in periods of drought) to ensure the establishment of the plants during the 12months defects period.

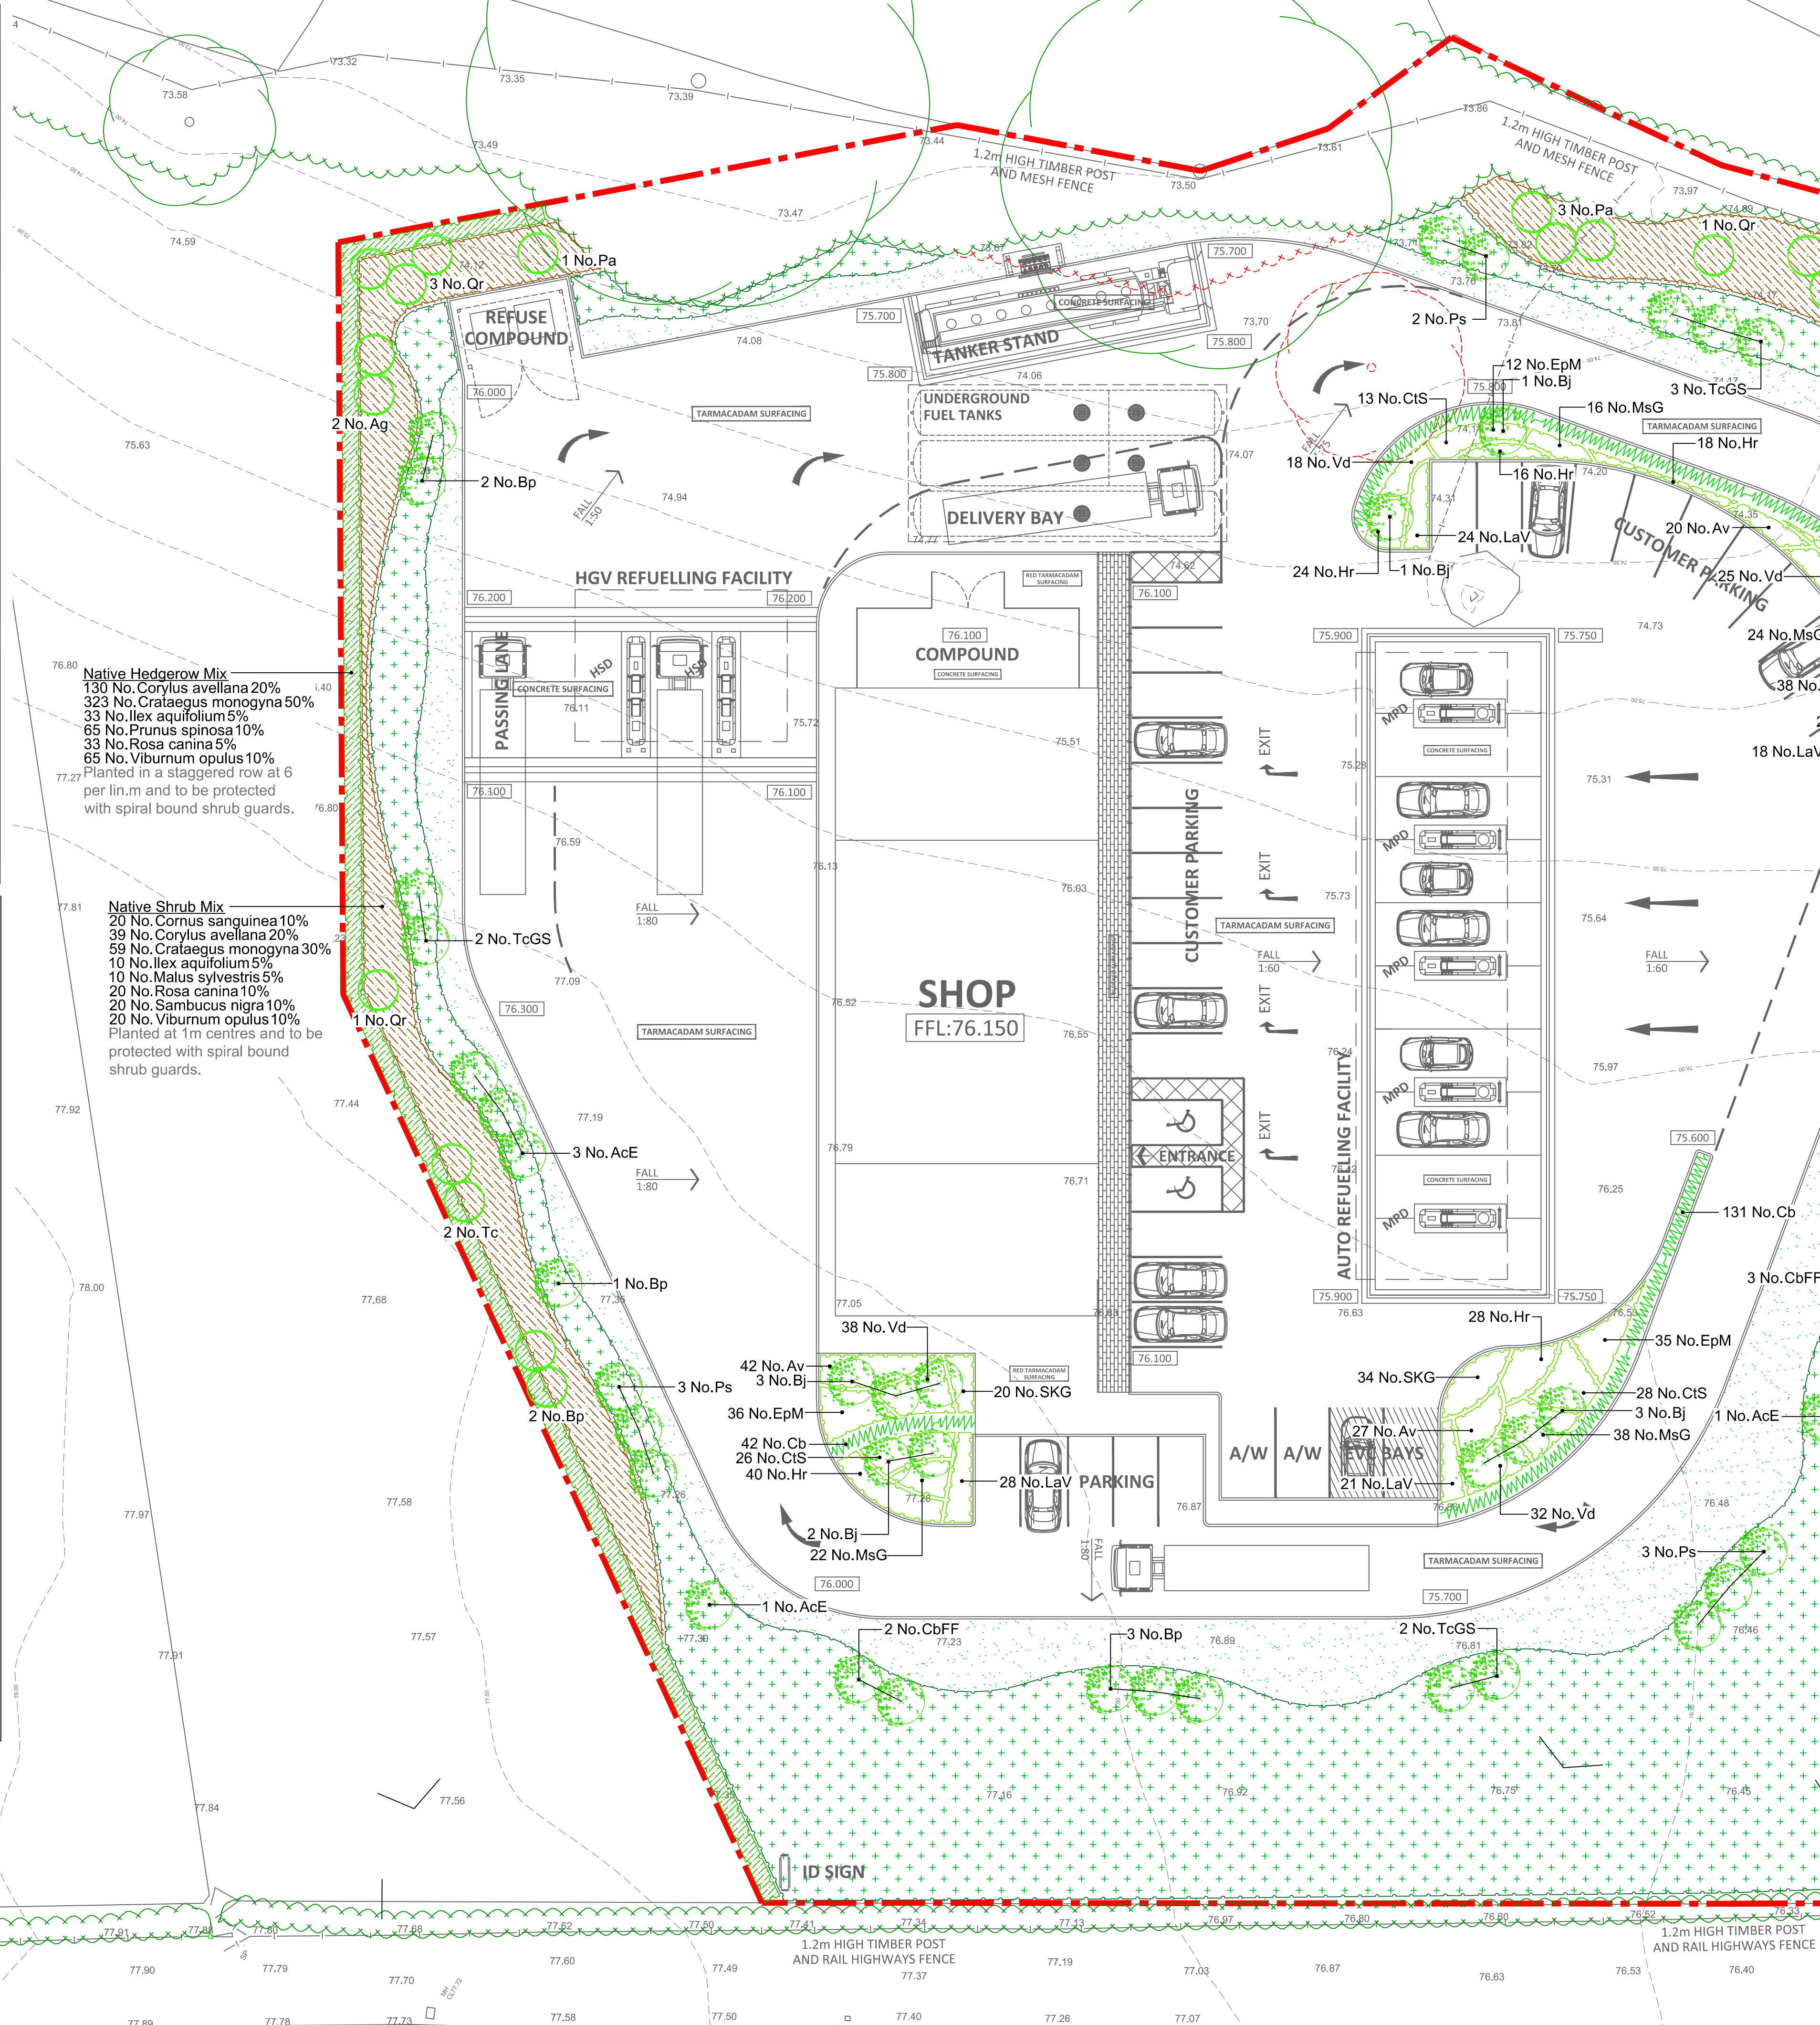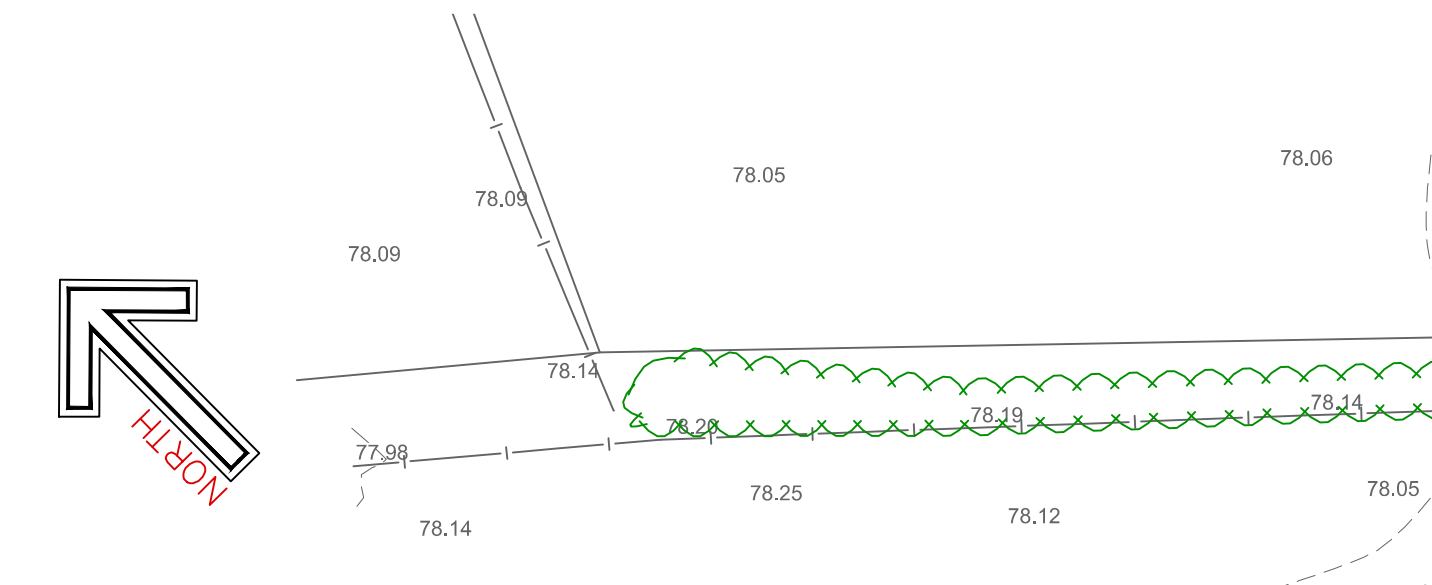

- KEY**
SOFT LANDSCAPING
- Existing Trees and Vegetation retained
 - Existing Trees and Vegetation removed
 - Proposed Trees planted as heavy standards at 12-14cm and multi-stem
 - Proposed Native Trees planted as standards at 8-10cm
 - Proposed Native Shrub Mix - Planted at 1m centres as 60-80mm BR whips.
 - Proposed Native Hedge planted BR at 6 per lin.m
 - Proposed Ornamental Hedge planted BR at 5 per lin.m
 - Proposed Shrub beds planted 3-7.5L containers 3-5 per sq.m
 - Proposed Wildflower Meadow Mix EM3 – special general purpose meadow mixture supplied by Emorsgate. www.wildseed.co.uk 01553 829028
 - Proposed grass areas seeded with a general amenity grass mix (unless otherwise advised by the client)

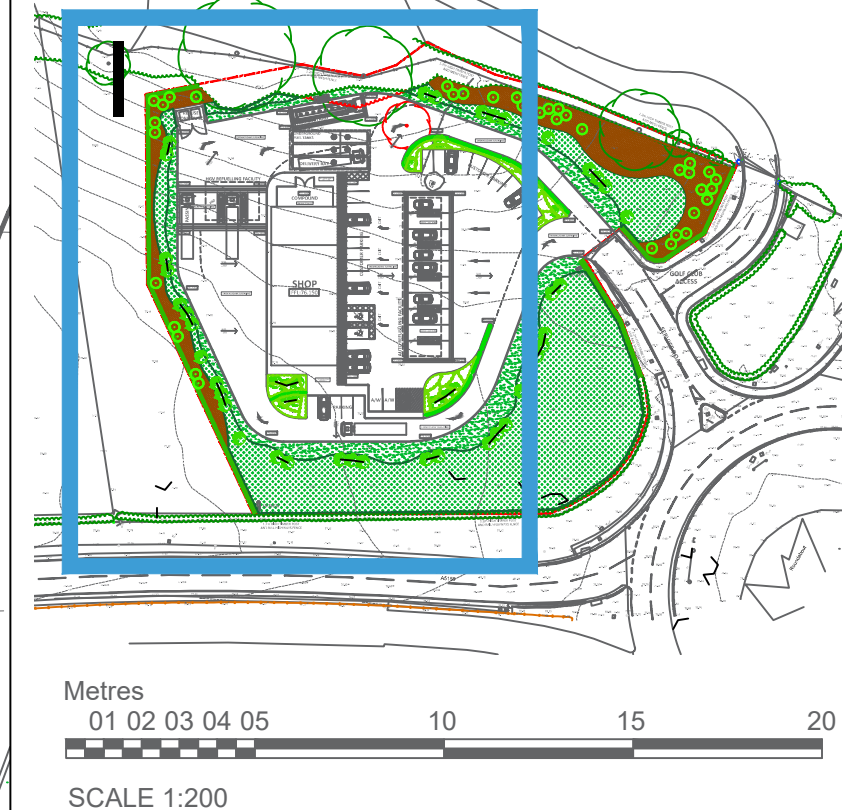

dep

DEP LANDSCAPE ARCHITECTURE LTD

BLACKFRIARS HOUSE, PARSONAGE
MANCHESTER, M3 2JA
T: 0161 2419878
E: info@dep.co.uk
W: www.dep.co.uk

Client
Euro Garages Ltd.

Project
Holt Road, Wrexham

Description
Landscape Layout (1 of 2)

Status
Planning

Scale
1:200@A1

Drawn
CL

Job number
4173

Drawing number
01

Date
19/12/18

Revision

Copyright DEP Landscape Architecture Ltd

All levels and dimensions to be checked on site by contractor prior to commencement; Any variations to be reported to the client. This drawing is to be read in conjunction with all others relating to the project and all information derived accordingly; any anomalies to be reported to the client. Use figured dimensions only. Work shown on this drawings to be carried out in accordance with current British Standards and Codes of Practice.

© Copyright to DEP Landscape Architecture Limited. The information shown on this drawing shall not be reproduced or copied in any form without prior written consent from DEP Landscape Architecture Limited.