

New boiler flue to terminate at head of extg chimney stack




Horizontal standing seam red zinc cladding

Powder coated aluminium curtain walling system

- Window cills lifted up due to proximity of carparking spaces

Horizontal standing seam red zinc cladding

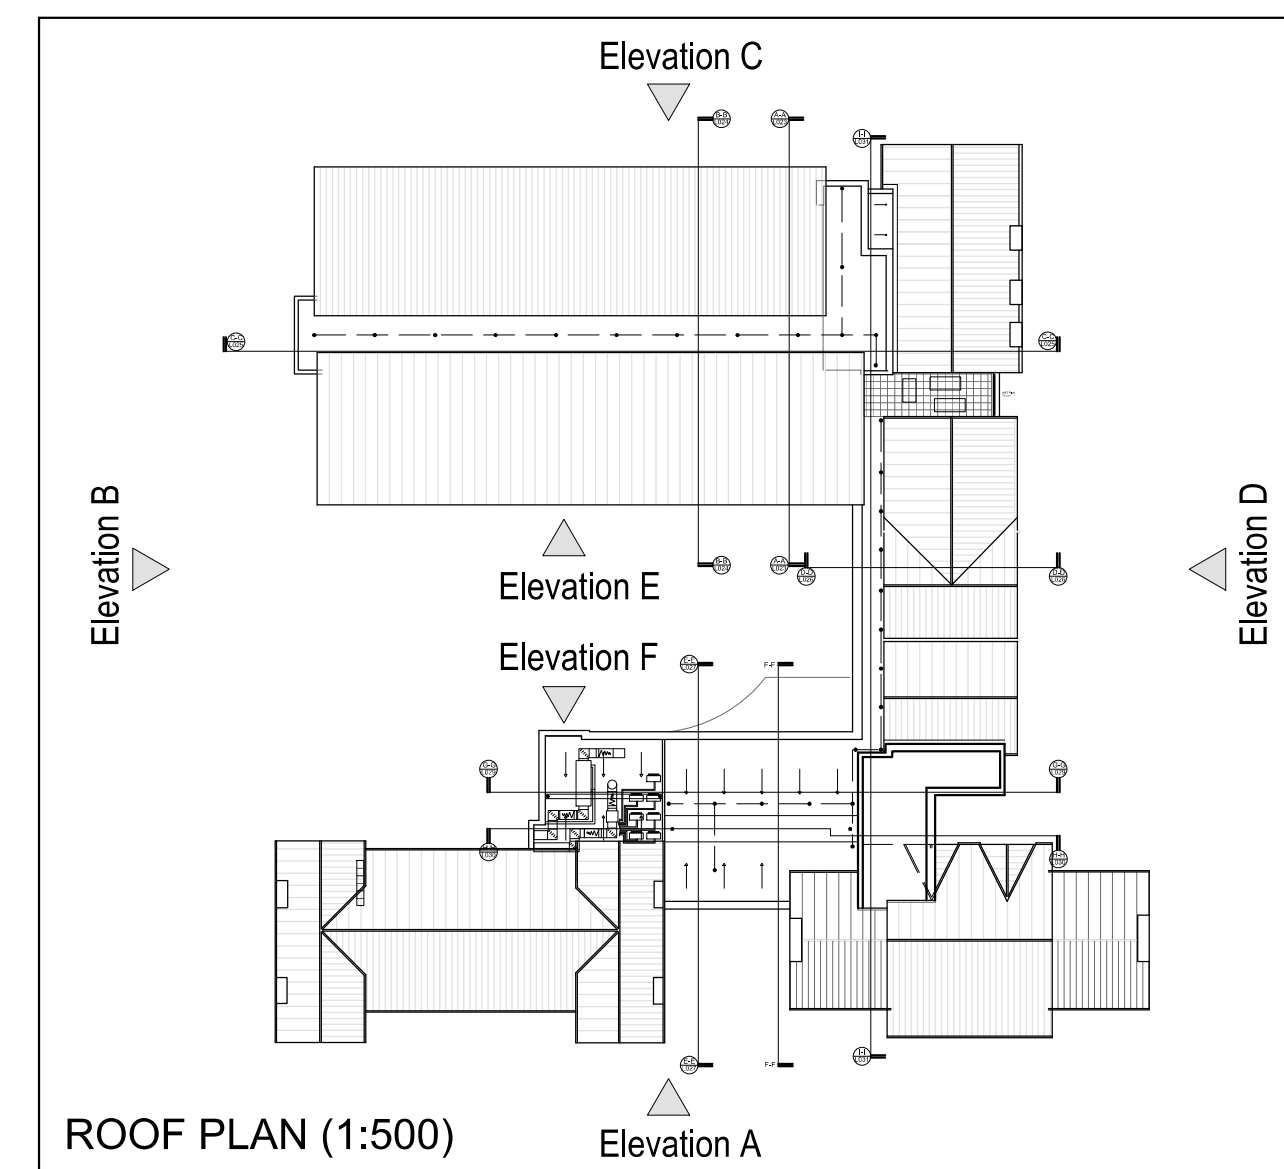

Rev K	Glazing bars to timber windows removed as per conservation officers approval	Jul 17	AJS
Rev J	WS.14 amended	Jun 17	JJ
Rev H	Cill heights increased to 825mm affl to Windows at 1st flr elevation D	Apr 17	AJS
Rev G	Window amended to suit manufacturers details, Feb 17	JJ	
	RWP locations identified on elevation D-D		

Rev F	Status amended, notes amended	Jan 17	JJ
Rev E	CWL.G.04 revised as per km request	Jan 17	JJ
Rev D	CWL.G.05 Added to elevations	Dec 16	
Rev C	AOV location identified	Jun 16	
Rev B	Zinc finish amended	Dec 15	
Rev A	Drawing amended as highlighted	Oct 15	

PROJECT		TITLE		SIZE		STATUS	
3-9 Grosvenor Road, Wrexham, LL11 1DB		Proposed Building Elevations Sheet 2		A1		CONSTRUCTION	
PROJECT NO. 1449				DRAWING NO. L021 K			
DRAWN BY AJS				CHECKED AJS			
DATE Jul 2015				SCALE (1:1)			