


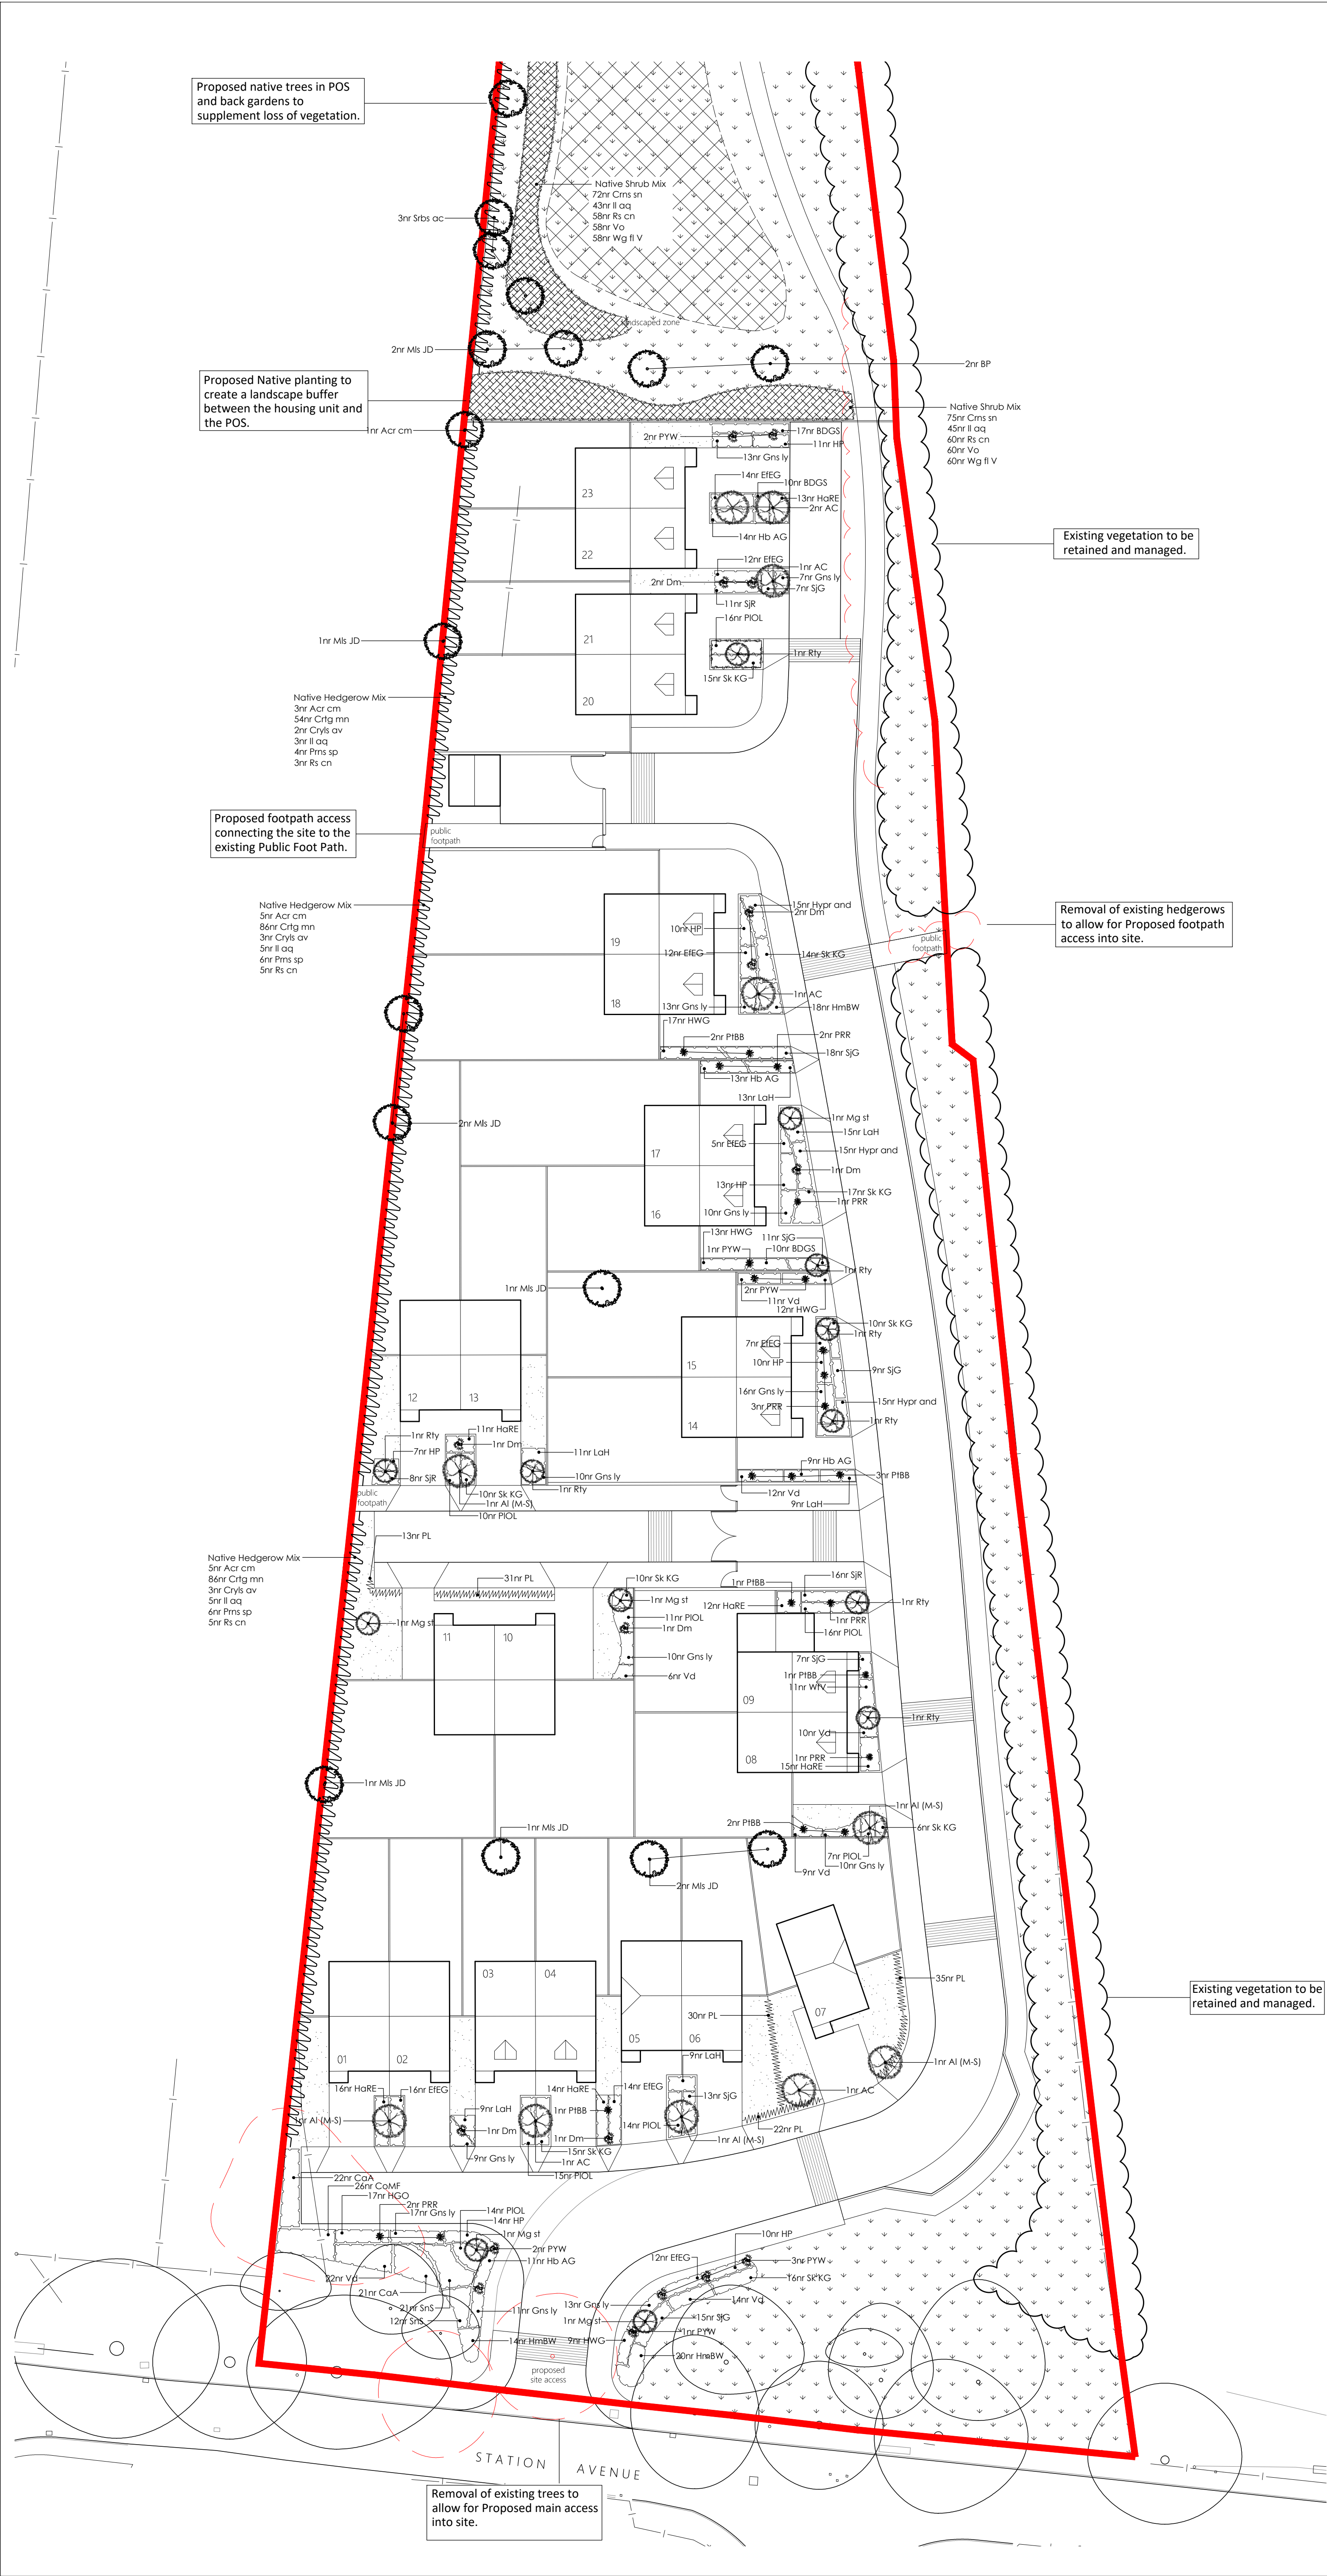

LEGEND

Existing Trees and Hedges to be Removed

Existing Trees and Hedges to be Retained

**Proposed Native Trees in POS**  
Advanced Nursery Stock, 16-18cm girth, 4.5-6.25m high to be planted with a double timber stake secured with a rubber tree tie. Species Include: Betula pendula, Quercus robur, Alnus glutinosa.

**Proposed Ornamental Trees in Front Gardens and Back Gardens**  
Heavy Standard, 12-14cm girth, 3.5- 4.25m high to be planted with a double timber stakes secured with a rubber tree tie. Species Include: Sorbus aria 'Magnifica', Acer campestre 'Elegans', Malus trilobata.

**Small Ornamental Tree/Large Shrub**  
Select Standard trees, 10-12cm girth, 3-3.5m high or large shrub 30-50L to be planted with a single timber stake secured with a rubber tree tie. Species Include: Amelanchier lamarckii, Pyrus salicifolia 'Pendula'.

**Ornamental Shrub Planting**  
Proposed shrubs and flowering herbaceous plants to be planted as 3-5L pots at 3-5 per sq.m. planted with feature specimen, 10-12L pots Species include: Hebe 'Red Edge', Choisya ternata, Potentilla fruticosa, Photinia x fraseri 'Red Robin'.

**Proposed Native Plant Mix**  
To be whip planting, 60-80cm height at 2 plants per sq.m. Species include: Viburnum opulus, Crataegus monogyna, Rosa canina, Cornus sanguinea.

**Proposed Ornamental Hedge to Gardens**  
Proposed ornamental hedge to be planted as 80-100cm height RB or 10L pots (depending on time of year planting) at 4 per lin.m to provide an instant impact. Species Include: Prunus lusitanica, Fagus sylvatica, Carpinus betulus.


**Proposed Native Hedgerow**  
Proposed native hedge to be 100-125cm height planted in a double row 300mm apart. Species include: Crataegus monogyna, Corylus avallana, Malus sylvestris, Sambucus nigra.

**Proposed Grass - Gardens**  
Front gardens to be turfed with a general amenity grass from a local supplier. Back gardens to be seeded.

**Grass - POS**  
Grass within POS to be seeded.

**Proposed Wildflower Meadow Mix**  
To be WF2 Flowering Meadow, supply by Germinal GB or similar approved. Including 80% of ornamental grasses and 20% of flowering perennials. Sowing rate 5/gm2.

Location Plan (NTS)

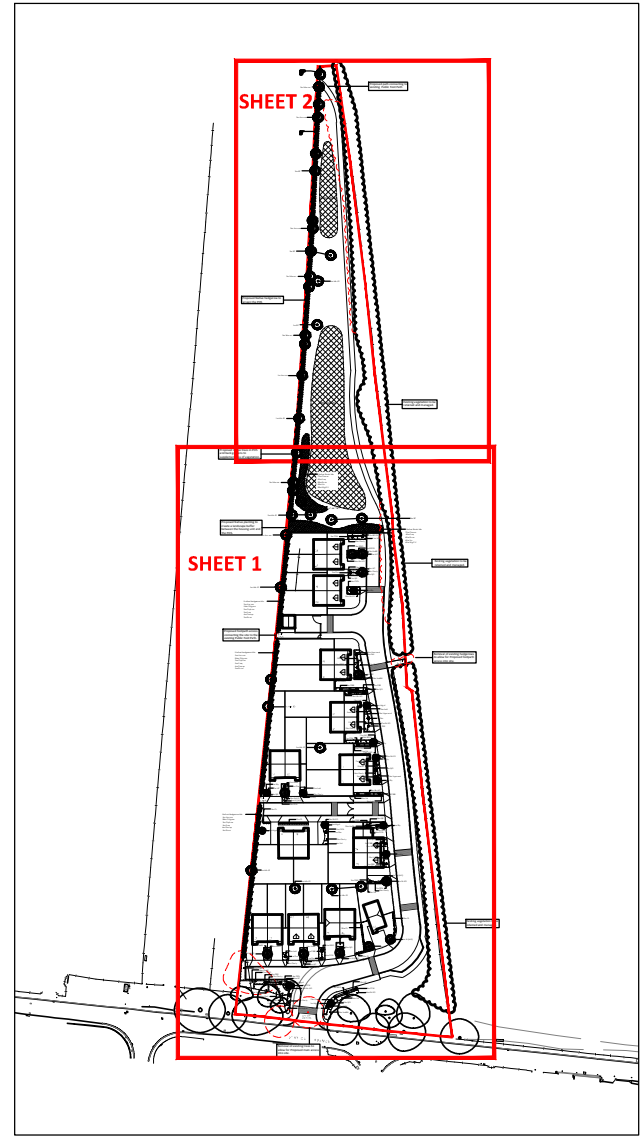

| REVISION NOTES |    |             |          |
|----------------|----|-------------|----------|
| Rev            | By | Description | Date     |
| -              | XX | -           | 00.00 15 |

Client

The Coop

Project

Chirk Avenue Station

Description

Planting Plan Sheet 1of 2

Status

For Approval

Scale @ A1

1:250

Drawn

AS

Checked

CT

Date

10.03.17

Job number

2745

Revision

201

Revision

-