Extract Plan 1:250



GENERAL NOTES

1. This drawing is the copyright of TPM Landscape Ltd and cannot be reproduced in any form without the consent of the company.
2. This drawing is to be read in conjunction with detail landscape drawings, details and specification.
3. This drawing is to be read in conjunction with all relevant Architects', Engineer's, Specialists, Bills of Quantities and Specifications.
4. The insertion of any firm or proprietary brand on this drawing is an indication of the class or quality required and does not exclude the use of alternative materials that are equal in performance, quality and appearance, provided that they have been approved in writing by the Landscape Architect.
5. The Contractor is responsible for accurately ascertaining the position of underground services and responding to all relevant service easement requirements.
6. All dimensions are in millimetres unless stated otherwise, for the purposes of construction this drawing must not be scaled and only written dimensions used. Written and scaled dimensions to be checked on site, any discrepancies reported prior to work commencing. IF IN DOUBT PLEASE ASK.
7. All work and materials are to be in accordance with the relevant British Standards and Code of Practice.
8. All Proprietary products are to be used strictly in accordance with the manufacturer's instructions and details.

Drainage Basin: Key Zones

- (A) Wet Base Zone
- (B) Lower damp margin zone
- (C) Marginal Zone
- (D) Upper Dry Bank Zone

Location Plan





(1) Precedent of Drainage Basin



(2) Marginal Planting Idea



(3) Wildflower EM8




(4) Wildflower N8




(5) Wildflower EM2



(6) Native Hedgerow Mix (infill existing hedgerows)

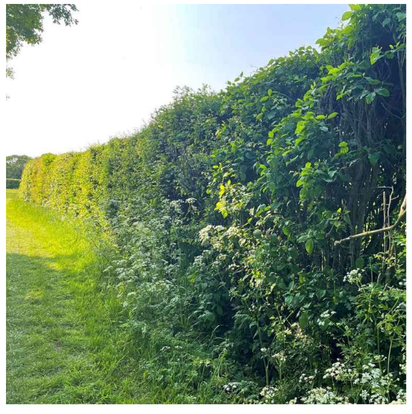

(7) Woodland Planting Mix

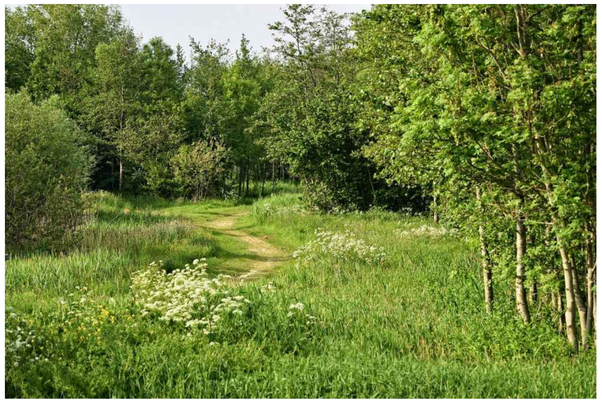

LEGEND

SOFT LANDSCAPE

Trees and Hedgerow to be Retained

Proposed Spine Road Trees
Trees to be planted as 20-25cm girth, Semi-mature, 4.5-5m high. Trees to be planted with a double timber stake secured with a rubber tree tie.

Proposed Native Trees
Trees to be planted as 14-16cm, Extra-heavy Standard, 3-4m high. Trees to be planted with a double timber stake secured with a rubber tree tie.

Proposed POS Grass
Species rich grassland in POS area to be seeded. Note: To be managed through regular grass cut

Proposed Wildflower Meadow
To be Emorsgate EM2 Standard General Purpose Meadow Mix, supplied by Emorsgate or similar approved. Including 80% grasses and 20% of wildflowers Sowing rate 4/gm2.

Proposed Wildflower for Marginal Areas
N8 Water's Edge Meadow Mixture for marginal areas. Supplied by Naturescape or similar approved. Sowing rate 5g/m2.

Proposed Marginal Plants
Mix of marginal plants to wetland area.

Proposed Wildflower Meadow for Wetlands
To be Emorsgate EM8 Meadow Mixture for Wetlands, supplied by Emorsgate or similar approved. Including 80% ornamental and fine-leaved natives grasses and 20% of wildflowers Sowing rate 4/gm2.

Proposed Native Hedge
100-120cm, BR stock, planted as a double staggered row at 300mm centres

Proposed Formal Hedge
Evergreen hedge to be planted at 100-120cm, 10L pots, at 5 per lin.m.

Proposed Woodland Planting Mix
Broadleaved woodland planting mix including Oak, Sycamore, Birch, Rowan and Hawthorn. Trees planted as 8-10cm girth, half standard. To be planted as whips with selected standards at 1p/m²

Proposed Ornamental Planting
Mixed shrub and herbaceous planting, 3-5L pots with 10-15L specimens. Planting beds to receive 75mm depth ornamental bark mulch.

Indicative Slopes
Maxinum gradiebt 1:3
To be confirmed by engineers

Protection Fence
Along Drainage Basin

REVISION NOTES

Rev	By	Description	Date
B	TS	Updated in line with Phasing Plan	25.07.25
A	TS	Updated in line with client comments	16.07.25

Client
Castle Green

Project
Stansty Road, Wrexham

Description
Drainage Basin in POS Area Details

Status
For Approval (5 of 5)

Scale @ A1	Drawn	Checked	Date
1:250	TS	CT	08.07.25
Job number	Drawing number		Revision
4852	112		B

N

tpm landscape
chartered landscape architects
address: 4th Floor Studio 10 Little Lever St Manchester M1 1HR
tel: 0161 235 0600 fax 0601 email info@tpmlandscape.co.uk