
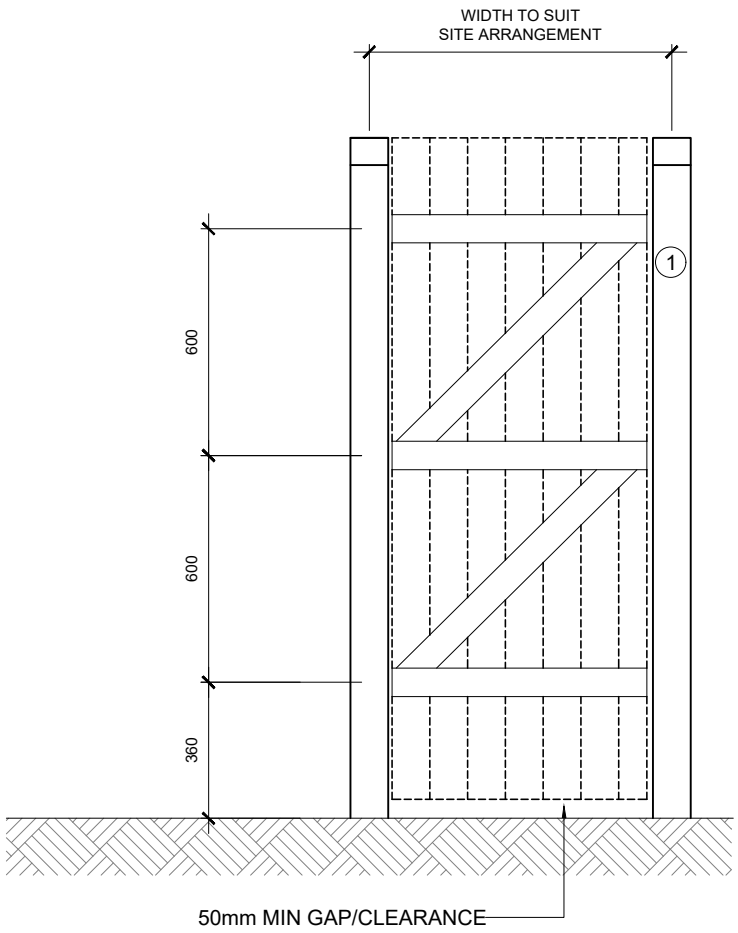


ELEVATION

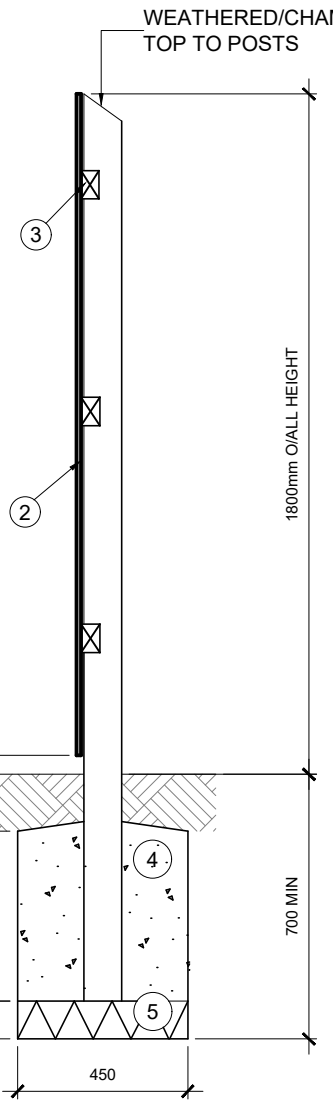

SECTION

1. 100x100mm S/W POSTS WITH WEATHERED TOPS.
2. 125x12mm TAPERED TO 6mm FEATHER EDGED BOARDING, 50mm GALVANISED RING SHANK NAIL FIXING.
3. 75x50mm RAILS AND CROSS BRACING FIXED TO POST WITH SUITABLE HINGES.
4. 450x450x450mm CONCRETE SURROUND TO POST. CONCRETE MIX C7.5
5. 100mm CONCRETE BED.

NOTE:-
ALL TIMBERS SHALL BE PRESSURE IMPREGNATED WITH PRESERVATIVE AS SPECIFIED. FINISH TO BE MID BROWN. ALL CUT ENDS TO BE PRESERVATIVE TREATED PRIOR TO FIXING.

TIMBER QUALITY SHALL BE AS NOTED IN BS 1722. PT 5 APPENDIX N.

0 1:20 1000mm

REV DATE DESCRIPTION

Castle Green

TIMBER FRAME STANDARD DETAILS

Title:
EXTERNAL DETAILS
GATE WITHIN FENCING

Scale (A3): 1:20
Ref: TF-04-117
Date: JULY 2024
Rev: -