



SECTION

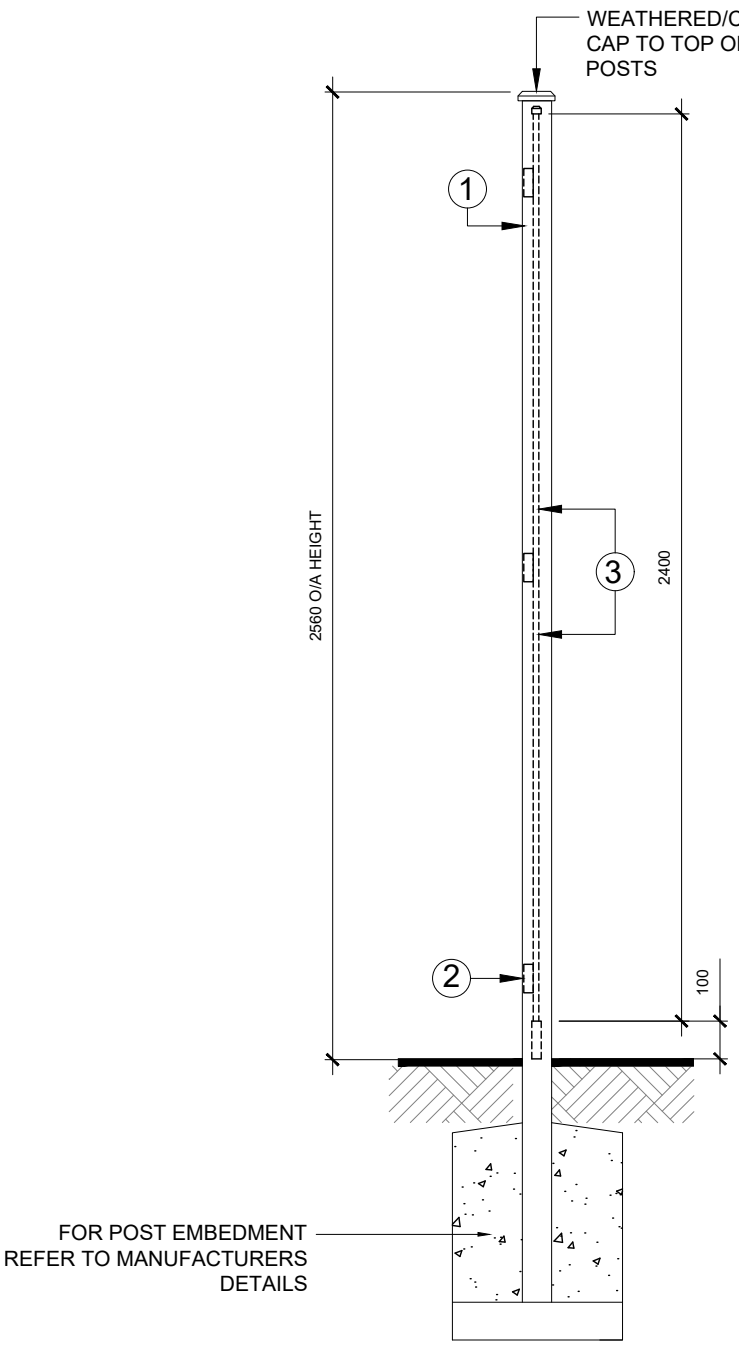

ELEVATION

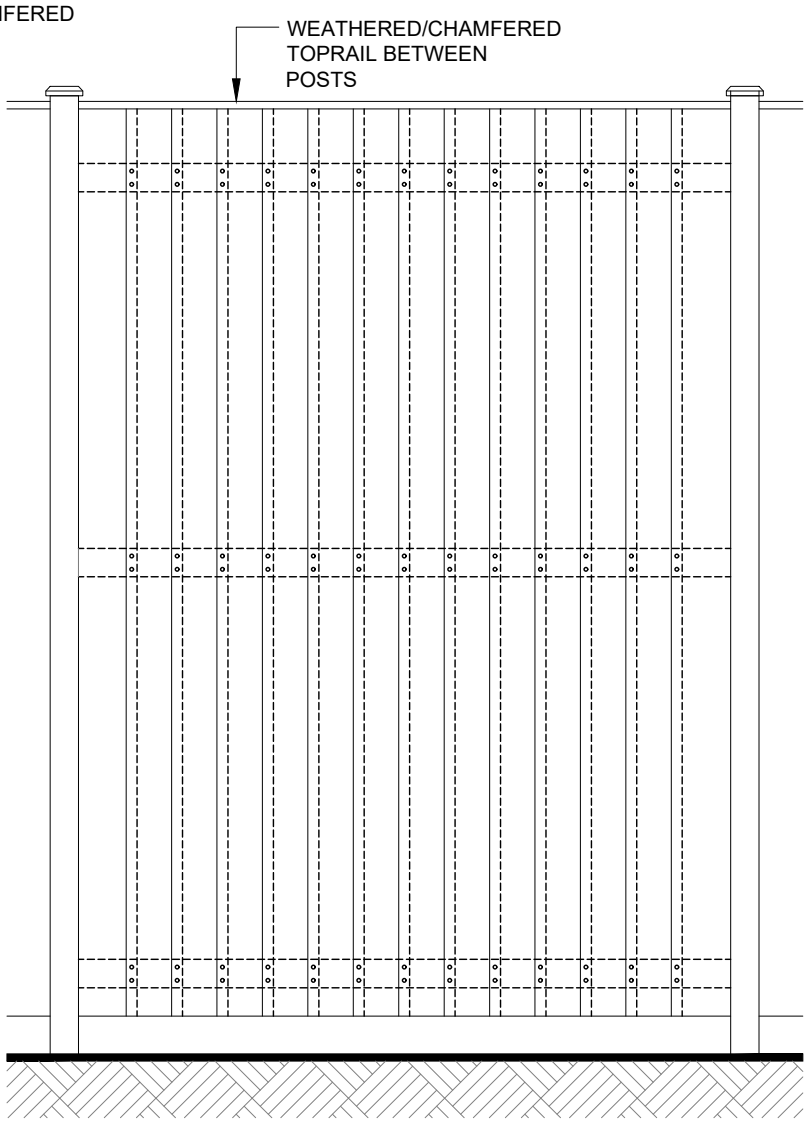

PLAN

NOTES:

ALL TIMBERS SHALL BE PRESSURE IMPREGNATED WITH PRESERVATIVE AS SPECIFIED. FINISH TO BE TWO COATS WOOD DYE AS SPECIFIED. ALL CUT ENDS TO BE PRESERVATIVE TREATED PRIOR TO FIXING.

1. 75x75mm S/W POST WITH WEATHERED CAP AT 1.8m CENTRES.
2. 75x25mm SAWN SOFTWOOD RAILS FIXED TO EACH POST WITH 2 No. 125mm GALVANISED NAILS.
3. 150x11mm SAWN SOFTWOOD FEATHER EDGE BOARDS FIXED WITH MINIMUM 25mm OVERLAP ON THREE TIMBER RAILS WITH 2 No. 65mm GALVANISED NAILS PER RAIL.

REV DATE DESCRIPTION

Castle Green

TIMBER FRAME STANDARD DETAILS

Title:
EXTERNAL DETAILS
FENCING
ENHANCED
2400mm HIGH

Scale (A3): 1:20

Ref: TF-04-114

Date: JAN 2024

Rev: -