Extract Plan 1:250



GENERAL NOTES

1. This drawing is the copyright of TPM Landscape Ltd and cannot be reproduced in any form without the consent of the company.
2. This drawing is to be read in conjunction with detail landscape drawings, details and specification.
3. This drawing is to be read in conjunction with all relevant Architects', Engineer's, Specialists, Bills of Quantities and Specifications.
4. The insertion of any firm or proprietary brand on this drawing is an indication of the class or quality required and does not exclude the use of alternative materials that are equal in performance, quality and appearance, provided that they have been approved in writing by the Landscape Architect.
5. The Contractor is responsible for accurately ascertaining the position of underground services and responding to all relevant service easement requirements.
6. All dimensions are in millimetres unless stated otherwise, for the purposes of construction this drawing must not be scaled and only written dimensions used. Written and scaled dimensions to be checked on site, any discrepancies reported prior to work commencing. IF IN DOUBT PLEASE ASK.
7. All work and materials are to be in accordance with the relevant British Standards and Code of Practice.
8. All Proprietary products are to be used strictly in accordance with the manufacturer's instructions and details.

Location Plan

LEGEND

SOFT LANDSCAPE

Trees and Hedgerow to be Retained

Proposed Native Trees
Trees to be planted as 14-16cm, Extra-heavy Standard, 3-4m high. Trees to be planted with a double timber stake secured with a rubber tree tie.

Proposed Medium Tree
Trees to be planted as 12-14cm girth, Heavy Standard, 3-4m high, to be staked and secured with suitable rubber ties.

Proposed Small Tree
Trees to be planted as 10-12cm girth or 50L pots, 2-3m high and secured with single stake and suitable rubber ties.

Proposed POS Grass
Species rich grassland in POS area to be seeded. Note: To be managed through regular grass cut

Proposed Native Bulb Planting

Proposed Wildflower Meadow
To be Emorsgate EM2 Standard General Purpose Meadow Mix, supplied by Emorsgate or similar approved. Including 80% grasses and 20% of wildflowers Sowing rate 4/gm2.

Proposed Native Buffer Planting
Native shrubs to be 60-90cm height in groups of 3 or 5 protected by tubex or spiral guard. Shrubs species should include a mix of native species which provide berries, fruits and flowers to attract a range of species such as bats, birds and invertebrates.

Proposed Ornamental Planting
Mixed shrub and herbaceous planting, 3-5L pots with 10-15L specimens. Planting beds to receive 75mm depth ornamental bark mulch.

HARD LANDSCAPE AND FEATURES

Proposed Main Footpath (2m wide)
To be surfaced with coloured tarmac.

Proposed Secondary Footpath (1.2m wide)
To be surfaced with self-binding gravel.


Proposed Feature Paving

Proposed 2 seat Benches and Litter Bin


1 Example of self binding gravel path with timber board edging




1 Self Binding Gravel Edge Path Section

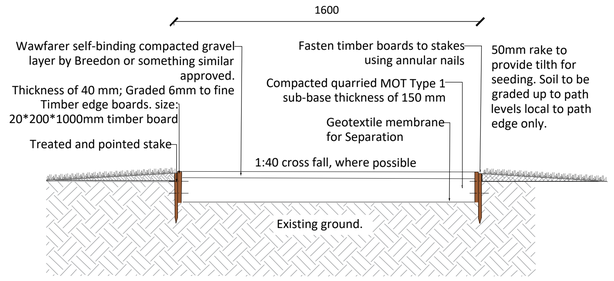

2 Laying Pattern of Half Circular Paving 1:50

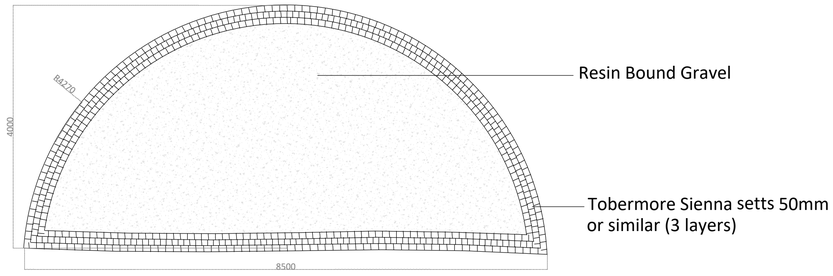

3 Junction Planting Beds Idea

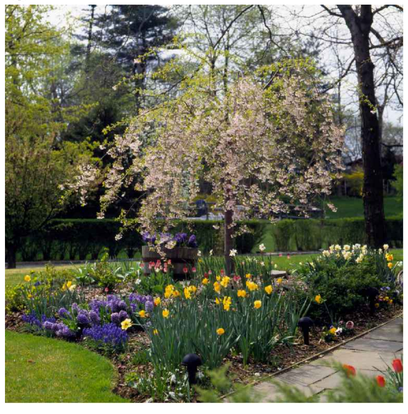

4 Feature areas Planting Beds Idea



5 Ecological Area- Group of Native Trees Planting



6 Ecological Area- Wildflower Meadow with Native and Existing Vegetation



REVISION NOTES

Rev	By	Description	Date
B	TS	Updated in line with client comments	29.07.25
A	TS	Updated in line with Phasing Plan	25.07.25

Client
Castle Green

Project
Stansty Road, Wrexham

Description
POS Areas in Phase 1 Details (4 of 5)

Status
For Approval

Scale @ A1	Drawn	Checked	Date
1:250	TS	CT	08.07.25
Job number	Drawing number		Revision
4852	111		B

N

tpm landscape
chartered landscape architects
address: 4th Floor Studio 10 Little Lever St Manchester M1 1HR
tel: 0161 235 0600 fax 0601 email info@tpmlandscape.co.uk