

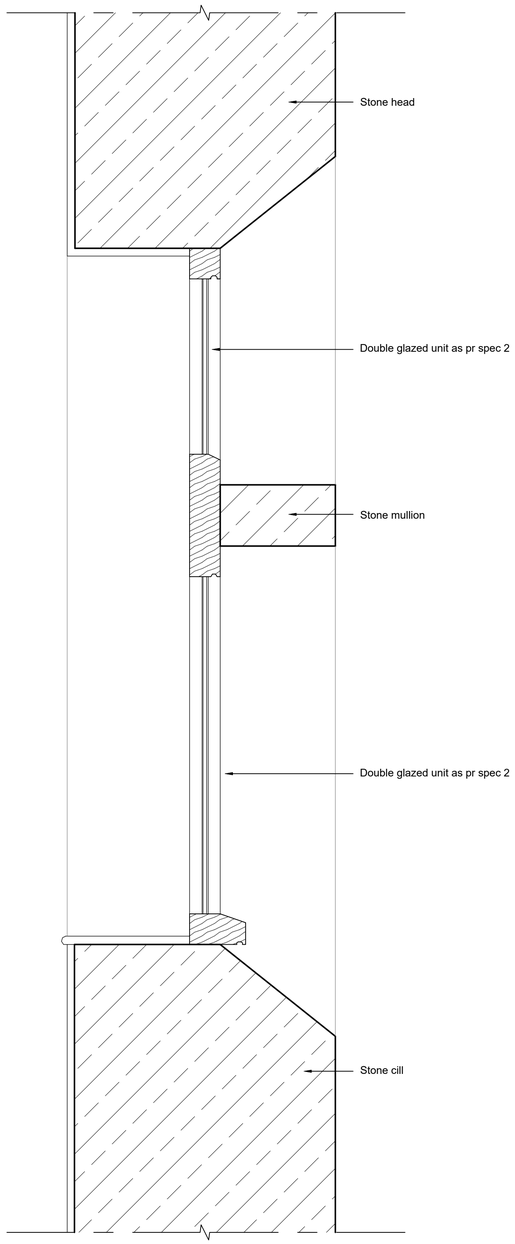



Street side window sections 1:5 fixed light

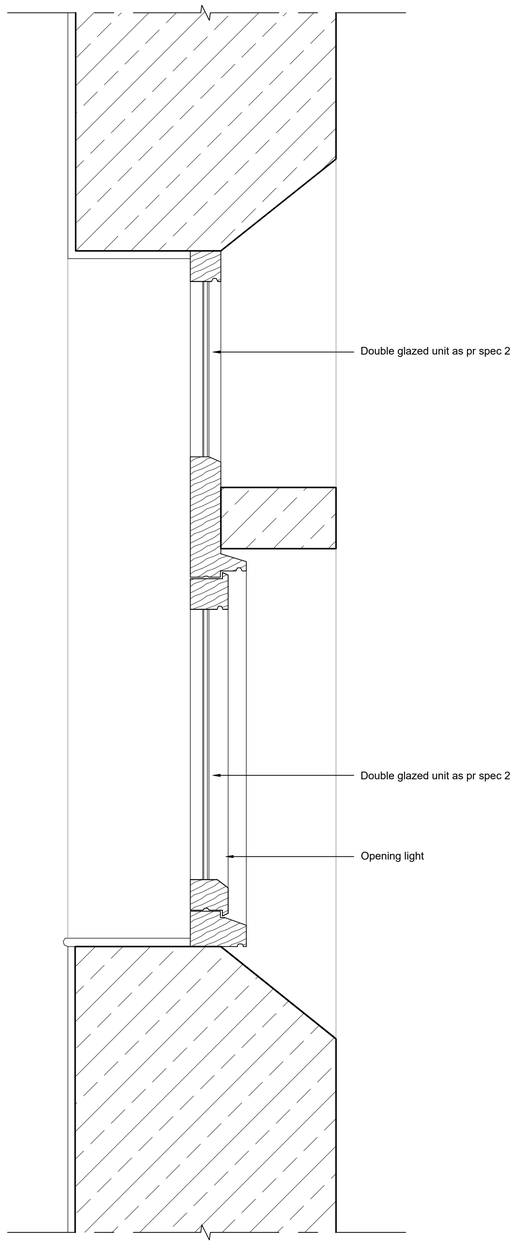

Street side window sections 1:5 Opening light

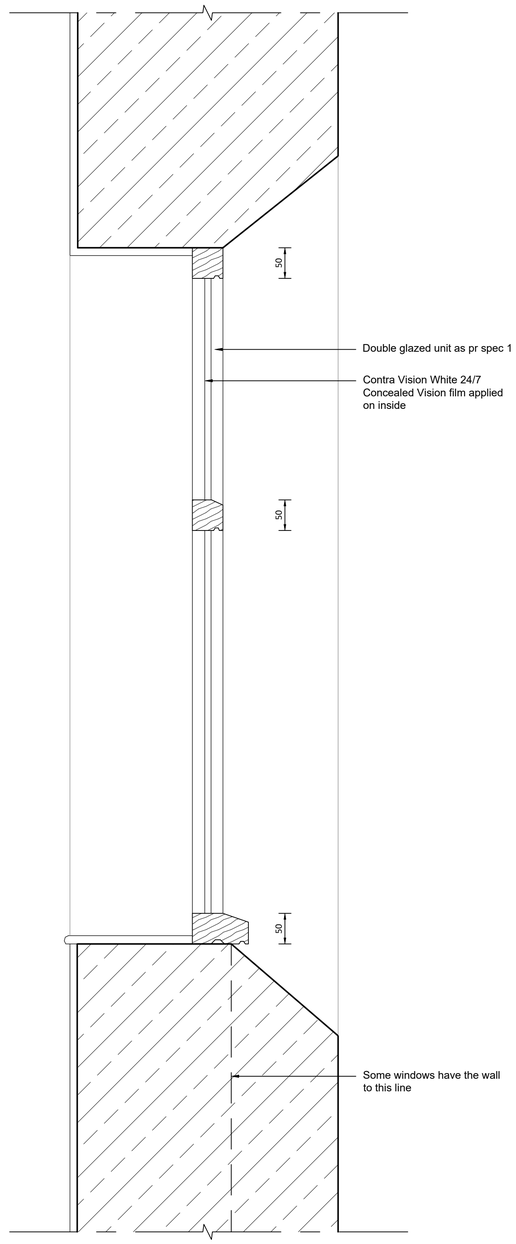

Platform side window sections 1:5 fixed light

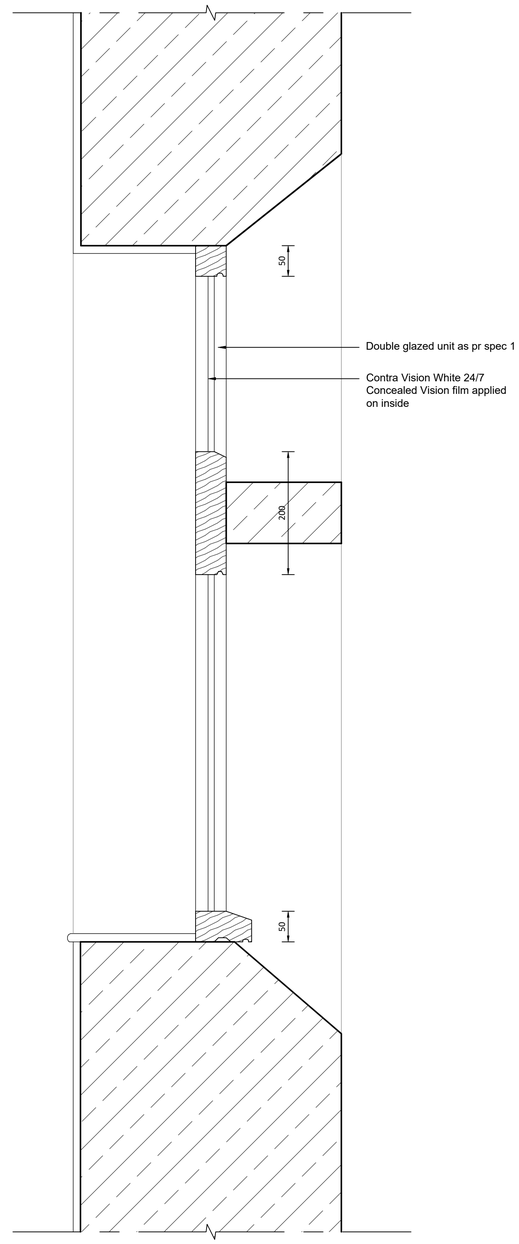

Platform side window sections 1:5 fixed light Stone mullion

Notes

Please see HDS drawing SR/PD/02 Proposed Elevations for details of window locations.

Materials
Windows to be hardwood timber construction

Finishes
Windows to be painted. RAL color to be confirmed by client and approved by the L.A.

Opening type
Windows to be traditional casement type with openable sashes as indicated on the elevation drawings

Structural openings
All openings are existing, size to be confirmed by supplier prior to manufacture

Hardware
Style of hardware to be confirmed by client

Safety glazing
Critical zones requiring toughened or laminated glazing are:
Within 1500 mm from finished floor level.
Side lights or glazing within 300 mm of either side of an external door.
Up to 800 mm from finished floor level in any full height window.
Up to 800 mm from finished floor level in any window with a cill height falling below that level. Safety glazing is to be provided to BS6206 as required by approved document N1.
All windows to be fitted to manufacturers instruction

New timber windows to follow sectional details of existing, apart from detail of opening light. Opening light has additional drip details for weather protection.

Glazing Specification

Specification 1-Facades overlooking rail line
Living rooms - Saint Gobain 4 (6) 10
Bedrooms - Saint Gobain 10 (12) 8.8A

Specification 2-Facades facing away from rail line
Living rooms - Saint Gobain 4 (12) 4
Bedrooms - Saint Gobain 10 (12) 8.8A

Schedule

Windows W-01 to W-09 to be Street side detail
Windows W-10 to W-20 to be Platform side detail

Ventilator Specification

Specification 1-Facades overlooking rail line
Living rooms - 1 x Greenwood Vent (5000EA) + 2 Acoustic Set
Bedrooms - 1 x Greenwood MA3051 (2500EA) Acoustic Wall Ventilator

Specification 2-Facades facing away from rail line
Living rooms - 1 x Greenwood Vent (5000EA)
Bedrooms - 1 x Greenwood MA3051 (2500EA) Acoustic Wall Ventilator

Proposed

HDS Architectural Services, The Foundry,
15 Yorke Street, Wrexham
LL13 8LW
Tel (01978) 345250
www.hdsarchitectural.co.uk

Project;	Dwg No;	Date;
Station House, Station Road, Ruabon, Wrexham, LL14 6DL	SH/PD/04	12.11.25

Title;	Scale (A1);	Revision;
06-Window detail drawing	1:5	