Arboricultural Impact Assessment

Proposed Development Works at Ardagh Metal Packaging Site, Wrexham

Client	Ardagh Metal Packaging
Agent	TACP Architects
Site Address	Bridge Rd, Wrexham LL13 9PS
Arboricultural Consultant	Mike Wood *Dip Arb. PTI, TechArbor A*
Local Authority	Wrexham County Borough Council (WCBC)
Proposal	Proposed development works, including new internal access road, buildings and landscaping
Survey Date	November 2025 and May 2026
Report Date	1st June 2026
Report Reference	260601-1.1-AIA-Ardagh Metals-T21-MW

Executive Summary 1
1.0 Qualifications and Experience 2
2.0 Introduction 2
3.0 Scope 2
3.1 Purpose of the Report 3
3.2 Documents Provided to Tree 21 Limited 3
3.3 Limitations 4
4.0 Site Visit and Tree Assessment Methodology 4
4.1 Data Collection 5
4.2 Presentation of the Data Collected 5
5.0 Site Description and Context 6
6.0 Summary of Tree Data 6
7.0 The Proposed Development 7
8.0 Arboricultural Constraints 7
9.0 Tree Removal and Pruning 8
10 Tree Protection 9
11.0 New Tree Panting and Final Soft Landscaping 9
12.0 Underground Service Installation and Substation Connection 9
13.0 Arboricultural Method Statement Heads of Terms 10

Appendices

- Appendix A: Tree Schedule
- Appendix B: Tree Constraints Plan
- Appendix C: Tree Protection Retention and Removal Plan
- Appendix D: The Proposed Development Layout
- Appendix E: Tree Protection Measures

Executive Summary

- This report provides an assessment upon the impact of trees and a proposal to construct a new internal access road, buildings and landscaping (the Proposed Development).

- A tree survey in accordance with BS5837:2012 was undertaken in November 2025 (north west and south east areas) and May (south west area) to inform this assessment. The survey recorded a total of 419 tree records overall, which are included in this assessment. The report was undertaken in accordance with BS5837:*2012 Trees in Relation to design, Demolition and Construction - Recommendations.*

- The tree records include; 416 trees, 2 tree groups and 1 woodland group. None of the trees have been recorded as category A, 18 tree records have been recorded as category B, 400 as category C and 1 as category U.

- To facilitate the project, 102 trees have been identified for removal. This includes 99 category C trees and 3 category B trees (T1318, T1319, T1400).

- Sixteen trees, comprising 7 category B, 8 category C and 1 category U have been felled to ground level between the survey in November 2025 and this assessment, for management reasons outside of this application.

- An extensive replanting programme will be developed as part of this Proposed Development to compensate for the trees which need to be removed, on a basis of at least a ratio of 1/1 with appropriate aftercare management.

- Tree protection measures have been set where considered appropriate to ensure the impact upon retained trees is as low as possible.

- An Arboricultural Method Statement has also been produced to ensure tree removal, retention, pruning, and protection are managed correctly throughout the project.

1.0 Qualifications and Experience

1.0.1 The survey and report have been prepared by Mike Wood *Dip Arb. TechArborA*, Principal Arboricultural Consultant of Tree 21 Limited. Mike Wood has 25 years' experience in arboriculture, with over 15 years' experience in providing BS5837 surveys and reports and is a certified LANTRA Professional Tree Inspector, a registered Quantified Tree Risk Assessment (QTRA) user and a member of the Arboricultural Association.

2.0 Introduction

2.0.1 This report and appendices have been produced to assess the impact upon trees and a proposal to construct a new internal access road, buildings and landscaping (the Proposed Development), as improvement works to the current Ardagh Metal Packaging facility in Wrexham.

2.0.2 The survey was undertaken in accordance with BS5837:2012 Recommendations. A topographical survey base plan was not available for trees to the north and south east. These trees were plotted on an OS basemap using an android tablet GPS as reference. The tree survey was recorded in a specialist tree survey programme on an android device.

2.0.3 The Tree Schedule at Appendix A provides all data and proposed action for each tree record. The Tree Constraints Plan (TCP) at Appendix B illustrates the trees in the current context. The Tree Protection, Retention and Removal Plan (TPRRP) at Appendix C illustrates the proposed context, with tree protection barriers where considered appropriate to protect retained trees. The TCP includes the position of the trees, crown spread in four cardinal directions, retention category and Root Protection Areas (RPA) in accordance with BS5837:2012.

3.0 Scope

3.0.1 A tree survey was undertaken in November 2025 and May 2026, further to instruction from TACP Architects on behalf of the client. The resulting survey data was then used to produce a Tree Schedule (Appendix A), Tree Constraints Plan (Appendix B) and Tree Protection Retention and Removal Plan (Appendix C) to inform this assessment.

3.1 Purpose of the Report

3.1.1 This assessment is intended to report on the impact upon surveyed trees, evaluating the impact of above ground parts (stem and branches), expressed as crown spread and below ground parts (roots), which is expressed as the Root Protection Area (RPA). The report also considers the wider impact on the landscape and post development/long-term sustainability between the proposal and the treescape.

3.1.2 The report, and the accompanying information, is supplied to assess the impact on trees from the Proposed Development, with the following areas as a framework:

- Trees to be removed to facilitate the proposal.
- Tree pruning work to facilitate the proposal.
- Identify suitable protection measures for retained trees throughout the construction of the proposal, including enabling works.
- Provide high level information on proposed compensation planting to contribute towards mitigation of the impact.
- Provide a "Heads of Terms" Arboricultural Method Statement to provide information on how trees will be managed through the process.

3.2 Documents Provided to Tree 21 Limited

- Location Plan
- Topographical Survey Plan (for the area to the south west)
- AWF-TACP-SE-XX-M2-A-7001-P01-Existing Site Plan Figure 4.2_revB Proposed Development - Proposed Landform
- AWF-TACP-SP-XX-M3-A-0001-Site Proposed.dwg

3.3 Limitations

3.3.1 This report is a preliminary assessment from ground level and observations have been made solely from visual inspection for the purposes of assessment in terms relevant to planning and development. Only hand tools have been used which may include binoculars, nylon mallet, laser measure, compass, height measuring device and fine manual metal probe to aid tree assessment where considered necessary during the survey. No detailed internal decay detection devices have been used in assessing trunk condition.

3.3.2 The conclusions relate to conditions found at the time of the survey. The recommendations contained within this report are valid for a period of one year only. Any significant alteration to the site that may affect the tree or have a bearing on the planning implications (including level changes, hydrological changes, extreme climatic events, or other site works) will necessitate a re-assessment of the trees and the site.

3.3.3 It should be noted that this survey is not a tree safety inspection. It is carried out to inform the planning process. Where clear and obvious hazards have been observed, these have been addressed in Appendix A - Tree Schedule). A full assessment of the levels of risk posed by trees would be informed by considering site use together with hazards present within the tree. Changes in site use are likely to occur during, and result from, the proposed development. In the light of these changes, regular tree risk assessments are advised.

3.3.4 Trees are living dynamic organisms, and their condition can change quickly, therefore this report is only valid for 12 months following the report date. A follow up tree survey should be undertaken beyond 12 months to re-assess the condition of the trees, which informs the retention categories in BS5837:2012, unless work has already progressed.

4.0 Site Visit and Tree Assessment Methodology

4.0.1 A site survey was undertaken in November 2025 of the trees in the north/north west and south east, with further survey work in May 2026 to assess the trees to the south west. March 2022. The survey took place from ground level aided by the Visual Tree

Assessment method (Mattheck and Breloer, 1994), in accordance with BS5837:2012 guidelines. The data was recorded in specialist tree data capture software.

4.0.2 Weather conditions were dry with adequate light and visibility to observe the trees and surrounding environs.

4.0.3 While this appraisal is not a tree risk assessment it nonetheless considers observed structural defects of the inspected tree, where applicable, to inform conclusions with regard to long term management.

4.0.4 Recommendations have been made, where considered appropriate to address immediate tree hazards/or to manage the trees within the context of the site becoming a work area and a Proposed Development site with consideration to long term retention.

4.1 Data Collection

4.1.1 Data collected includes a designated tree (T) or group (G), tree species, height, number of stems, diameter at 1.5m above ground level, crown clearance (height of periphery of crown spread above ground level), branch spread (to N, S, E and W), age class, physiological condition, useful life expectancy tree condition, site notes (where this has a bearing on the present or future health or structural condition of the tree), preliminary management recommendations, and tree retention category in accordance with BS5837:2012.

4.2 Presentation of the Data Collected

4.2.1 Data collected during the Tree Survey is presented in the Tree Schedule table in Appendix A in accordance with BS5837:2012 *Trees in Relation to Design, Demolition and Construction – Recommendations*.

4.2.2 The tree survey data is provided in the Tree Schedule (Appendix A) and illustrated on the Tree Constraints Plan (Appendix B). The Tree Protection, Retention and Removal Plan (Appendix C) provides the proposals, as a layer over the TCP and provides illustrative information on tree removal, tree retention and any recommended tree protection. All other relevant data are presented within the main body of this assessment.

5.0 Site Description and Context

5.0.1 The site area comprises industrial buildings, internal infrastructure, including an internal road which follows the perimeter of the buildings, car parking and landscaped area. The area of trees to the north/north west which have been surveyed, are those which have been planted upon a soil bund, which is likely to have arose from the initial construction and remaining earthworks of the industrial unit. These trees are mostly semi mature, with occasional early mature specimens.

5.0.2 Other areas of the survey include amenity trees, planted to improve the landscape within the site. None of the trees are particularly visible from outside the site, with the exception of those around the periphery.

5.0.3 Species across the site are generally broadleaved native species, with occasional evergreen conifers. Most trees are early mature of semi-mature.

6.0 Summary of Tree Data

6.0.1 The pie charts and bar chart below summarise the retention categories and the age range of surveyed trees across the site.

Chart 1: Provides information on the tree retention categories across the site in accordance with BS5837:2012.


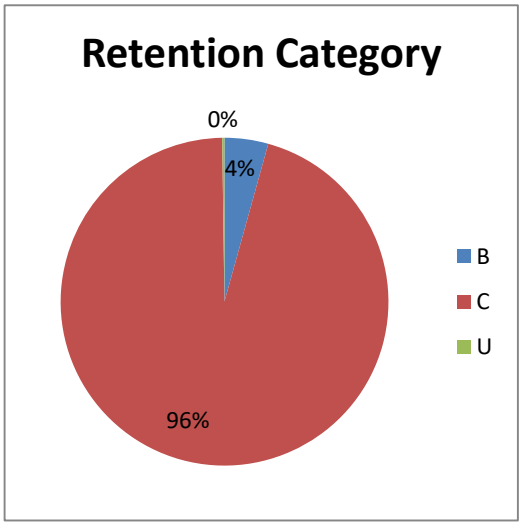


Chart 2: Provides information on the life stages of trees across the site.

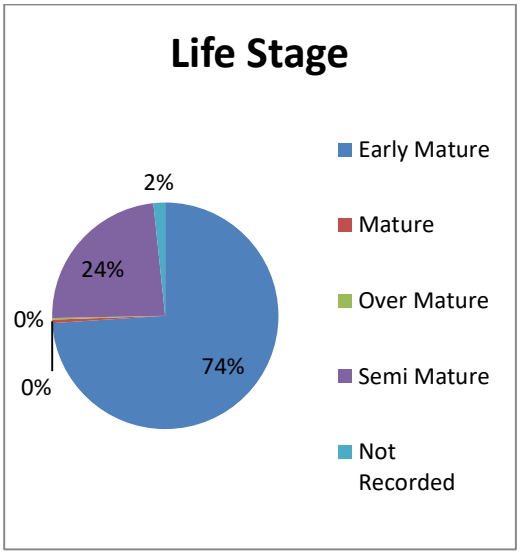

7.0 The Proposed Development

7.0.1 The proposal includes new staff welfare areas, infrastructure and expansion of the current industrial space. This results in the requirement to establish a new access road within part of the trees, previously planted on the bund to the north/north west. The proposals have been overlaid and are illustrated on the Tree Protection, Retention and Removal Plan (TPRRP) at Appendix C and are presented separately at Appendix D.

8.0 Arboricultural Constraints

8.0.1 Tree constraints are presented in the Tree Schedule in Appendix A and the Tree Constraints Plan in Appendix B. These constraints are also considered further below.

8.0.2 The TCP, (Appendix B) illustrates the Root Protection Area (RPA) for the trees identified in the Tree Data Schedule (Appendix A). This represents the minimum area in m^2 which should ideally be left undisturbed around retained trees. The TCP also shows a representation of the crown spread of each tree measured in four cardinal directions. The RPA has been calculated in accordance with BS5837:2012 Trees in Relation to Design, Demolition & Construction – Recommendations.

9.0 Tree Removal and Pruning

9.0.1 Trees proposed for removal are listed in the Tree Schedule at Appendix A and illustrated on the TPRRP at Appendix C. The table below, summarises the number of trees (T), groups (G) and hedges (H) to be removed in accordance with their BS5837:2012 retention categories.

Table 1: Tree Removal & Pruning

Category A	Category B	Category C	Category U
None	T1318, T1319, T1400	T1026, T3914, T0297, T0188, T0304, T1982, T1252, T1222, T1106, T1165, T1055, T1208, T1224, T1251, T1195, T1168, T1166, T1122, T1168, T1166, T1122, T1118, T1098, T1077, T1029, T1028, T0181, T0300, T0305, T0307, T1030, T1053, T1054, T1103, T1104, T1105, T1119, T1120, T1121, T1163, T1164, T1185, T1186, T1187, T1188, T1189, T1190, T1191, T1192, T1193, T1194, T1197, T1198, T1199, T1200, T1201, T1202, T1203, T1204, T1205, T1206, T1223, T1226, T1228, T1229, T1230, T1231, T1232, T1233, T1234, T1235, T1236, T1237, T1238, T1239, T1240, T1241, T1242, T1243, T1244, T1245, T1253, T1254, T1256, T1257, T1258, T1259, T1260, T1261, T1262, T1263, T1264, T1265, T1266, T1267, T1268, T1273, T1274, T1275, T1276, T1277, T1999	None
Total: 0	**Total: 3 trees**	**Total: 99 trees**	**Total: 0**

9.0.2 There are no planned pruning works to retained trees.

10 Tree Protection

10.0.1 The Tree Protection, Retention and Removal Plan (Appendix C), illustrates the proposed alignment of protective measures for retained trees. The protective barriers are intended to be installed before any works begin, including enabling works, with the exception of tree felling work, which will need to be undertaken before the installation of the protective barriers, due to practicalities.

10.0.2 The barriers will minimise damage within the Root Protection Areas (RPA) of retained tree, groups, and hedges. They will prevent potential damage such as soil compaction or contamination, or physical damage to above ground tree parts from machinery activity. The areas within the protected areas will be a Construction Exclusion Zone (CEZ). No activity at all, including the storage of materials or equipment will be undertaken within the CEZ.

10.0.4 The protective barriers will be maintained in good condition throughout the construction works and only removed on completion, to enable final soft landscaping. Any works required within the CEZ or any other areas where Root Protection Areas cannot be fully protected, should only be undertaken following the Arboricultural Method Statement, which will be approved to Wrexham County Borough Council (WCBC) before implementing the methods within the document.

11.0 New Tree Panting and Final Soft Landscaping

11.0.1 As part of the proposal, new tree planting will be provided at a ratio of at least 1/1 and include aftercare management. Any tree that dies within a 5-year period will be replaced in the following planting season (November-March).

12.0 Underground Service Installation and Substation Connection

12.0.1 No underground service plans have been provided. All proposed underground services should be planned outside of the RPA of retained trees.

12.0.2 Any subsequent alterations or plans to install underground services within RPAs of retained trees should be discussed with the Arboricultural Consultant and suitable methodology, to be agreed with the WCBC Tree Officer and approved in writing before being implemented.

13.0 Arboricultural Method Statement Heads of Terms

In order to ensure any potential damage to retained trees is minimised, the following points will be followed and further details provided in a specific Arboricultural method Statement.

a. Tree removal and pruning works will be undertaken by competent and qualified arborists, working to best practice BS3998:2010. Trees will be removed, and the site cleared of all arisings unless identified for re-use on site before the tree protection barrier is installed.

b. Tree Protection, as set out in the Tree Protection Plan at Appendix C, will be installed before any other works associated, including other enabling works and earthworks and before any plant equipment, welfare, storage or compounds are set up on site. The tree protection will be checked monthly by an Arboricultural Consultant to ensure it is maintained in good order throughout the project duration.

c. Machinery, storage of materials, welfare areas or any other storage or activity including access and egress haul routes to remove or deliver material will not occur within the CEZ.

d. Any damage arising to any retained tree will initiate an inspection by an Arboricultural Consultant, who will provide appropriate management specifications, to be agreed with the WCBC Tree Officer before implementation.

Legislation and Guidance

Town & Country Planning Act 1990

Town & Country Planning (Trees) Regulations 1999

Forestry Act 1967

Health & Safety at Work Act 1974

Construction (Design & Management) Regulations 1994

BS 5837:2012 Trees in Relation to Design, Demolition & Construction - Recommendations

BS 3998:2010 Tree Work Recommendations

National Joint Utilities Group Publication No.4

REFERENCES

Mattheck, C. and Breloer, H. (1995). The Body Language of Trees: A handbook for failure analysis. Research for Amenity Trees **4**. HMSO, London, 240pp.

Matheny, N and Clark, J (1997) Trees and Development: A Technical Guide to Preservation of Trees During Land Development. ISBN 1-881956-20-2

STANDARDS PUBLICATIONS

Trees in Relation Design, Demolition & Construction – Recommendations. (BS5837), British Standards Institution, London (2012).

Tree Work - Recommendations. (BS3998), British Standards Institution, London (2010).

Appendix A

Tree Schedule

Tree Categories

Tree Data

Table 1 Cascade Chart taken from BS5837:2012 Trees in Relation to Design, Demolition & Construction – Recommendations.

BS5837:2012 data tables with recommendations

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
G002	Mixed species *(Mixed species)*	Protect trees with protective barriers - as shown on plans.	Group	1	Height (m): 9 Stem Diam(mm): 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years	This group is a continuation of the trees recorded as individuals in the survey area. Species and age range are similar to those surveyed individually.	C2	1.5	0.0	319.00	Area: 319 sq m.
G003	Mixed species *(Mixed species)*	Protect trees with protective barriers - as shown on plans.	Group	1	Height (m): 12 Stem Diam(mm): 100 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years	This group is a is located to the west of the existing hard standing storage area. Species and age range are similar to those surveyed individually, with Prunus Avium as the prominant species. Access to the area was not possible at the time of the survey, due to dense bramble and other vegetation. The trees do not extend into the existing storage area. The group has been plotted for context only.	C2	1.5	0.0	917.00	Area: 917 sq m.
T0034	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 150 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T0181	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	5	Height (m): 8 5 stems (mm): 120, 110, 150, 110, 90 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	3.2	32.00	Radius: 3.2m. Area: 32 sq m.
T0183	Common hawthorn *(Crataegus monogyna)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 8 2 stems (mm): 100, 160 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.3	17.00	Radius: 2.3m. Area: 17 sq m.
T0188	Field maple *(Acer campestre)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	2	Height (m): 10 2 stems (mm): 150, 140 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.5	20.00	Radius: 2.5m. Area: 20 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T0257	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 120, 70 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T0272	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 110 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.3	5.00	Radius: 1.3m. Area: 5 sq m.
T0296	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 10 3 stems, avg.(mm): 120 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.5	20.00	Radius: 2.5m. Area: 20 sq m.
T0297	Field maple *(Acer campestre)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	2	Height (m): 8 2 stems (mm): 90, 90 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.5	7.00	Radius: 1.5m. Area: 7 sq m.
T0300	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 7 2 stems (mm): 80, 90 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T0301	Common hawthorn *(Crataegus monogyna)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 100, 100 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T0302	Common hawthorn *(Crataegus monogyna)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 100, 150 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T0303	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 10 3 stems (mm): 100, 130, 140 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.6	21.00	Radius: 2.6m. Area: 21 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T0304	Pedunculate oak *(Quercus robur)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	1	Height (m): 8 Stem Diam(mm): 130 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T0304	Pedunculate oak *(Quercus robur)*	No action required.	Tree	1	Height (m): 8 Stem Diam(mm): 130 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T0305	Pedunculate oak *(Quercus robur)*	Remove tree to facilitate construction.	Tree	2	Height (m): 10 2 stems (mm): 140, 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.4	18.00	Radius: 2.4m. Area: 18 sq m.
T0307	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 9 2 stems (mm): 190, 150 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.9	26.00	Radius: 2.9m. Area: 26 sq m.
T0308	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 120 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T0309	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 100, 130 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T0310	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 90 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.1	4.00	Radius: 1.1m. Area: 4 sq m.
T0311	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 110, 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T0312	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems, avg.(mm): 160 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.7	23.00	Radius: 2.7m. Area: 23 sq m.
T0313	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 110, 90 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T0314	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 120 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T0315	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T0316	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 200 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.4	18.00	Radius: 2.4m. Area: 18 sq m.
T0317	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 130 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T0318	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 170, 170 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.9	26.00	Radius: 2.9m. Area: 26 sq m.
T0319	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 11 Stem Diam(mm): 240 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.9	26.00	Radius: 2.9m. Area: 26 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T0320	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 110, 100 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T0321	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 200 Spread (m): 3N, 3E, 3S, 3W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.4	18.00	Radius: 2.4m. Area: 18 sq m.
T0322	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 130 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	5.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T0323	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 130 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 3 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	3.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T0324	Pedunculate oak *(Quercus robur)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 140 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T0325	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 170 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T0326	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 130, 50 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T0327	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 90, 110 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T0328	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 170 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T0487	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 180 Spread (m): 1N, 2E, 2S, 2W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T0490	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 130, 50 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T0494	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 100, 110 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T0498	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems, avg.(mm): 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.4	18.00	Radius: 2.4m. Area: 18 sq m.
T1001	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 11 Stem Diam(mm): 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T1002	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 11 Stem Diam(mm): 220 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.6	21.00	Radius: 2.6m. Area: 21 sq m.
T1003	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 12 2 stems (mm): 160, 150 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.6	21.00	Radius: 2.6m. Area: 21 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1004	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 90, 90 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.5	7.00	Radius: 1.5m. Area: 7 sq m.
T1005	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 130, 70 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T1006	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 110, 60 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.5	7.00	Radius: 1.5m. Area: 7 sq m.
T1007	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1008	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 6 2 stems (mm): 80, 60 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1009	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 170 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1010	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 180 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1011	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 100, 80 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.5	7.00	Radius: 1.5m. Area: 7 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1012	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 8 2 stems (mm): 160, 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.6	21.00	Radius: 2.6m. Area: 21 sq m.
T1013	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 9 3 stems (mm): 100, 100, 110 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.1	14.00	Radius: 2.1m. Area: 14 sq m.
T1014	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 8 Stem Diam(mm): 90 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.1	4.00	Radius: 1.1m. Area: 4 sq m.
T1015	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 110, 70 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1016	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 130, 130 Spread (m): 2.5N, 2.5E, 2.5S, 2.5W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1017	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 12 Stem Diam(mm): 180 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1018	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 12 Stem Diam(mm): 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 4 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	4.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T1019	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 12 3 stems (mm): 110, 80, 60 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 4 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	4.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1020	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 12 2 stems (mm): 100, 200 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 4 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	4.0	2.7	23.00	Radius: 2.7m. Area: 23 sq m.
T1021	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 12 Stem Diam(mm): 120 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1022	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 12 2 stems (mm): 190, 110 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.6	21.00	Radius: 2.6m. Area: 21 sq m.
T1023	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 150 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T1024	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 120 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 4 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	4.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1025	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 130, 80 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 4 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	4.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T1026	Wild cherry *(Prunus avium)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	1	Height (m): 8 Stem Diam(mm): 160 Spread (m): 1N, 1.5E, 3S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1027	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 12 Stem Diam(mm): 150 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1028	Field maple *(Acer campestre)*	No action required.	Tree	2	Height (m): 9 2 stems (mm): 150, 140 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	2.5	20.00	Radius: 2.5m. Area: 20 sq m.
T1028	Field maple *(Acer campestre)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	2	Height (m): 9 2 stems (mm): 150, 140 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	2.5	20.00	Radius: 2.5m. Area: 20 sq m.
T1028	Field maple *(Acer campestre)*	No action required.	Tree	2	Height (m): 9 2 stems (mm): 150, 140 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	2.5	20.00	Radius: 2.5m. Area: 20 sq m.
T1029	Field maple *(Acer campestre)*	No action required.	Tree	2	Height (m): 8 2 stems (mm): 110, 120 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1029	Field maple *(Acer campestre)*	No action required.	Tree	2	Height (m): 8 2 stems (mm): 110, 120 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1029	Field maple *(Acer campestre)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	2	Height (m): 8 2 stems (mm): 110, 120 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1030	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 10 2 stems (mm): 170, 180 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	3.0	28.00	Radius: 3.0m. Area: 28 sq m.
T1031	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 8 Stem Diam(mm): 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1032	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 8 Stem Diam(mm): 160 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1033	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 110, 50 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.5	7.00	Radius: 1.5m. Area: 7 sq m.
T1034	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 6 Stem Diam(mm): 90 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.1	4.00	Radius: 1.1m. Area: 4 sq m.
T1035	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 9 3 stems (mm): 90, 80, 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1036	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 9 3 stems, avg.(mm): 120 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.5	20.00	Radius: 2.5m. Area: 20 sq m.
T1037	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 130, 110 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1038	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 12 3 stems, avg.(mm): 130 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.7	23.00	Radius: 2.7m. Area: 23 sq m.
T1039	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 11 Stem Diam(mm): 150 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 4 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	4.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1040	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 11 2 stems (mm): 120, 190 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.7	23.00	Radius: 2.7m. Area: 23 sq m.
T1041	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 11 Stem Diam(mm): 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T1042	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 11 Stem Diam(mm): 120 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 6 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	6.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1043	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 100 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1044	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 90, 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1045	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 7 Stem Diam(mm): 130 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1046	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 170, 120 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.5	20.00	Radius: 2.5m. Area: 20 sq m.
T1047	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 12 Stem Diam(mm): 200 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 4 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	4.0	2.4	18.00	Radius: 2.4m. Area: 18 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1048	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 11 2 stems (mm): 150, 130 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.4	18.00	Radius: 2.4m. Area: 18 sq m.
T1049	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 120 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1050	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 110, 110 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1051	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 8 Stem Diam(mm): 120 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1052	Pedunculate oak *(Quercus robur)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 130 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1053	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	6	Height (m): 9 6 stems, avg.(mm): 100 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Multi stem.	C1	1.5	2.9	26.00	Radius: 2.9m. Area: 26 sq m.
T1054	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	1	Height (m): 9 Stem Diam(mm): 170 Spread (m): 2N, 2E, 3S, 2W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1055	Wild cherry *(Prunus avium)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	2	Height (m): 9 2 stems (mm): 150, 90 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.1	14.00	Radius: 2.1m. Area: 14 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1056	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 6 Stem Diam(mm): 90 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.1	4.00	Radius: 1.1m. Area: 4 sq m.
T1057	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 7 Stem Diam(mm): 90 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.1	4.00	Radius: 1.1m. Area: 4 sq m.
T1058	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 130, 80 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T1059	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 8 2 stems (mm): 110, 70 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1060	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 100 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 3 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	3.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1061	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 12 2 stems (mm): 200, 170 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	3.1	30.00	Radius: 3.1m. Area: 30 sq m.
T1062	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 110 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	5.0	1.3	5.00	Radius: 1.3m. Area: 5 sq m.
T1063	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 120, 50 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.6	8.00	Radius: 1.6m. Area: 8 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1064	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 90, 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1065	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 8 Stem Diam(mm): 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1066	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 10 3 stems (mm): 70, 120, 150 Spread (m): 1N, 2E, 2S, 2W Crown Clearance (m): 4 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	4.0	2.4	18.00	Radius: 2.4m. Area: 18 sq m.
T1067	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 10 3 stems (mm): 100, 130, 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.3	17.00	Radius: 2.3m. Area: 17 sq m.
T1068	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 12 Stem Diam(mm): 120 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	5.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1069	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 12 Stem Diam(mm): 130 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1070	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 12 Stem Diam(mm): 120 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	5.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1071	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 12 Stem Diam(mm): 150 Spread (m): 1N, 2E, 1S, 1W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1072	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 11 Stem Diam(mm): 120 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1073	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 90, 80 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1074	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 100, 80 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.5	7.00	Radius: 1.5m. Area: 7 sq m.
T1075	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 8 2 stems (mm): 110, 140 Spread (m): 1N, 1E, 2S, 1W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	2.1	14.00	Radius: 2.1m. Area: 14 sq m.
T1076	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 140, 150 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	2.5	20.00	Radius: 2.5m. Area: 20 sq m.
T1077	Field maple *(Acer campestre)*	No action required.	Tree	3	Height (m): 9 3 stems (mm): 140, 160, 130 Spread (m): 2N, 2E, 4S, 2W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	3.0	28.00	Radius: 3.0m. Area: 28 sq m.
T1077	Field maple *(Acer campestre)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	3	Height (m): 9 3 stems (mm): 140, 160, 130 Spread (m): 2N, 2E, 4S, 2W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	3.0	28.00	Radius: 3.0m. Area: 28 sq m.
T1077	Field maple *(Acer campestre)*	No action required.	Tree	3	Height (m): 9 3 stems (mm): 140, 160, 130 Spread (m): 2N, 2E, 4S, 2W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	3.0	28.00	Radius: 3.0m. Area: 28 sq m.
T1078	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 8 Stem Diam(mm): 100 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1079	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 8 Stem Diam(mm): 130 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1080	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 8 2 stems (mm): 110, 110 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1081	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 160, 170 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.8	25.00	Radius: 2.8m. Area: 25 sq m.
T1082	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 100, 70 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.5	7.00	Radius: 1.5m. Area: 7 sq m.
T1083	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 13 Stem Diam(mm): 160 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	5.0	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1084	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 13 Stem Diam(mm): 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 4 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	4.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T1085	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 11 Stem Diam(mm): 200 Spread (m): 1.5N, 1.5E, 2.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.4	18.00	Radius: 2.4m. Area: 18 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1086	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 100 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 4 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	4.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1087	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 90, 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1088	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 11 Stem Diam(mm): 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1089	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 13 2 stems (mm): 80, 130 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T1090	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 11 2 stems (mm): 120, 130 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.1	14.00	Radius: 2.1m. Area: 14 sq m.
T1091	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 13 2 stems (mm): 90, 50 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1092	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 110 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.3	5.00	Radius: 1.3m. Area: 5 sq m.
T1093	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 100 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1094	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 200 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	2.4	18.00	Radius: 2.4m. Area: 18 sq m.
T1095	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 7 Stem Diam(mm): 110 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	1.3	5.00	Radius: 1.3m. Area: 5 sq m.
T1096	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 5 Stem Diam(mm): 130 Spread (m): 1N, 2E, 2S, 2W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1097	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 8 Stem Diam(mm): 100 Spread (m): 1N, 1E, 1.5S, 1W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1098	Field maple *(Acer campestre)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	3	Height (m): 9 3 stems (mm): 200, 140, 140 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	3.4	36.00	Radius: 3.4m. Area: 36 sq m.
T1099	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 130, 130 Spread (m): 1N, 2E, 2S, 2W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1100	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 9 3 stems (mm): 100, 130, 100 Spread (m): 1.5N, 2E, 2S, 2W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	2.3	17.00	Radius: 2.3m. Area: 17 sq m.
T1101	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 150 Spread (m): 1N, 1E, 1S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1102	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 170, 70 Spread (m): 1.5N, 2E, 2S, 2W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1103	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 9 2 stems (mm): 140, 140 Spread (m): 1.5N, 2E, 2S, 2W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	2.4	18.00	Radius: 2.4m. Area: 18 sq m.
T1104	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	1	Height (m): 5 Stem Diam(mm): 110 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.3	5.00	Radius: 1.3m. Area: 5 sq m.
T1105	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	3	Height (m): 7 3 stems (mm): 90, 100, 120 Spread (m): 1.5N, 2E, 2S, 2W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1106	Field maple *(Acer campestre)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	1	Height (m): 7 Stem Diam(mm): 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1106	Field maple *(Acer campestre)*	No action required.	Tree	1	Height (m): 7 Stem Diam(mm): 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1106	Field maple *(Acer campestre)*	No action required.	Tree	1	Height (m): 7 Stem Diam(mm): 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1107	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 6 2 stems (mm): 100, 80 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	1.5	7.00	Radius: 1.5m. Area: 7 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1108	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 8 2 stems (mm): 100, 110 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T1109	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9.5 Stem Diam(mm): 150 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T1110	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 8 Stem Diam(mm): 120 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1111	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 9 3 stems (mm): 120, 140, 80 Spread (m): 1.5N, 1.5E, 1.5S, 2W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	2.4	18.00	Radius: 2.4m. Area: 18 sq m.
T1112	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 90, 170 Spread (m): 1.5N, 1.5E, 1.5S, 2W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	2.3	17.00	Radius: 2.3m. Area: 17 sq m.
T1113	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 120, 120 Spread (m): 1.5N, 1.5E, 1.5S, 2W Crown Clearance (m): 3 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	3.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1114	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 13 2 stems (mm): 200, 190 Spread (m): 1.5N, 1.5E, 1.5S, 2W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	3.3	34.00	Radius: 3.3m. Area: 34 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1115	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 160, 80 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.1	14.00	Radius: 2.1m. Area: 14 sq m.
T1116	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 150 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T1117	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 120 Spread (m): 1.5N, 1.5E, 1.5S, 2W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1118	Field maple *(Acer campestre)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	2	Height (m): 9 2 stems (mm): 150, 180 Spread (m): 1.5N, 1.5E, 2S, 2W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	2.8	25.00	Radius: 2.8m. Area: 25 sq m.
T1118	Field maple *(Acer campestre)*	No action required.	Tree	2	Height (m): 9 2 stems (mm): 150, 180 Spread (m): 1.5N, 1.5E, 2S, 2W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	2.8	25.00	Radius: 2.8m. Area: 25 sq m.
T1118	Field maple *(Acer campestre)*	No action required.	Tree	2	Height (m): 9 2 stems (mm): 150, 180 Spread (m): 1.5N, 1.5E, 2S, 2W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	2.8	25.00	Radius: 2.8m. Area: 25 sq m.
T1119	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	1	Height (m): 9 Stem Diam(mm): 220 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	2.6	21.00	Radius: 2.6m. Area: 21 sq m.
T1120	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 10 2 stems (mm): 190, 150 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.9	26.00	Radius: 2.9m. Area: 26 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1121	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 8 2 stems (mm): 140, 80 Spread (m): 1.5N, 1.5E, 1.5S, 2W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1122	Field maple *(Acer campestre)*	No action required.	Tree	3	Height (m): 8 3 stems (mm): 120, 130, 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	2.7	23.00	Radius: 2.7m. Area: 23 sq m.
T1122	Field maple *(Acer campestre)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	3	Height (m): 8 3 stems (mm): 120, 130, 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	2.7	23.00	Radius: 2.7m. Area: 23 sq m.
T1122	Field maple *(Acer campestre)*	No action required.	Tree	3	Height (m): 8 3 stems (mm): 120, 130, 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	2.7	23.00	Radius: 2.7m. Area: 23 sq m.
T1123	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 7 Stem Diam(mm): 90 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.1	4.00	Radius: 1.1m. Area: 4 sq m.
T1124	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 9 3 stems (mm): 110, 60, 90 Spread (m): 2N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T1125	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 7 3 stems (mm): 100, 90, 70 Spread (m): 1N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1126	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 8 2 stems (mm): 130, 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1127	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 9 3 stems (mm): 140, 130, 140 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	2.8	25.00	Radius: 2.8m. Area: 25 sq m.
T1128	Pedunculate oak *(Quercus robur)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 8 Stem Diam(mm): 100 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1129	Pedunculate oak *(Quercus robur)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 8 3 stems (mm): 60, 80, 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T1130	Common hawthorn *(Crataegus monogyna)*	Protect trees with protective barriers - as shown on plans.	Tree	4	Height (m): 6 4 stems (mm): 70, 80, 80, 80 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1131	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 7 2 stems (mm): 100, 70 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.5	7.00	Radius: 1.5m. Area: 7 sq m.
T1132	Crack willow *(Salix fragilis)*	Protect trees with protective barriers - as shown on plans.	Tree	4	Height (m): 9 4 stems (mm): 300, 160, 140, 260 Spread (m): 3N, 3E, 3S, 3W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		B1	1.0	5.4	92.00	Radius: 5.4m. Area: 92 sq m.
T1133	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 6 Stem Diam(mm): 140 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1134	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 13 2 stems (mm): 170, 130 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	2.6	21.00	Radius: 2.6m. Area: 21 sq m.
T1135	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 5 Stem Diam(mm): 90 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.1	4.00	Radius: 1.1m. Area: 4 sq m.
T1136	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 8 Stem Diam(mm): 90 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.1	4.00	Radius: 1.1m. Area: 4 sq m.
T1137	Pedunculate oak *(Quercus robur)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 11 Stem Diam(mm): 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 4 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	4.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T1138	Common hawthorn *(Crataegus monogyna)*	Protect trees with protective barriers - as shown on plans.	Tree	8	Height (m): 6 8 stems, avg.(mm): 80 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Multi stem adjacent the boundary fence,	C1	1.5	2.7	23.00	Radius: 2.7m. Area: 23 sq m.
T1139	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	3.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T1140	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 8 3 stems (mm): 130, 110, 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	2.4	18.00	Radius: 2.4m. Area: 18 sq m.
T1141	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 11 Stem Diam(mm): 130 Spread (m): 1.5N, 1.5E, 1.5S, 2W Crown Clearance (m): 4 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	4.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1142	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 8 2 stems (mm): 120, 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1143	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 150, 90 Spread (m): 1.5N, 1.5E, 1.5S, 2W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.1	14.00	Radius: 2.1m. Area: 14 sq m.
T1144	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 11 Stem Diam(mm): 110 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.3	5.00	Radius: 1.3m. Area: 5 sq m.
T1145	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 11 Stem Diam(mm): 120 Spread (m): 1.5N, 1.5E, 1.5S, 2W Crown Clearance (m): 4 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	4.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1146	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 100, 150 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1147	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 110 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.3	5.00	Radius: 1.3m. Area: 5 sq m.
T1148	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 8 2 stems (mm): 110, 150 Spread (m): 1.5N, 1.5E, 1.5S, 2W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1149	Pedunculate oak *(Quercus robur)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 150 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 4.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	4.5	1.8	10.00	Radius: 1.8m. Area: 10 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1150	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 11 Stem Diam(mm): 270 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	3.2	32.00	Radius: 3.2m. Area: 32 sq m.
T1151	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 8 3 stems (mm): 120, 140, 160 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.9	26.00	Radius: 2.9m. Area: 26 sq m.
T1152	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	4	Height (m): 7 4 stems (mm): 60, 70, 90, 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	3.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1153	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 7 Stem Diam(mm): 120 Spread (m): 1.5N, 1.5E, 2S, 1.5W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1154	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 90 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 3 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	3.0	1.1	4.00	Radius: 1.1m. Area: 4 sq m.
T1155	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 10 3 stems (mm): 100, 60, 70 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1156	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 8 Stem Diam(mm): 110 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.3	5.00	Radius: 1.3m. Area: 5 sq m.
T1157	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 8 3 stems (mm): 70, 80, 100 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1158	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 8 Stem Diam(mm): 150 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T1159	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 140 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T1160	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 8 Stem Diam(mm): 170 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1161	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 150 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T1162	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 8 2 stems (mm): 100, 90 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1163	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 10 2 stems (mm): 200, 120 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.8	25.00	Radius: 2.8m. Area: 25 sq m.
T1164	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 9 2 stems (mm): 170, 130 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	2.6	21.00	Radius: 2.6m. Area: 21 sq m.
T1165	Field maple *(Acer campestre)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	6	Height (m): 9 6 stems, avg.(mm): 80 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.4	18.00	Radius: 2.4m. Area: 18 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1166	Field maple *(Acer campestre)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	3	Height (m): 9 3 stems (mm): 150, 80, 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.4	18.00	Radius: 2.4m. Area: 18 sq m.
T1167	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 9 3 stems (mm): 90, 120, 120 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.3	17.00	Radius: 2.3m. Area: 17 sq m.
T1168	Field maple *(Acer campestre)*	No action required.	Tree	2	Height (m): 10 2 stems (mm): 110, 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.1	14.00	Radius: 2.1m. Area: 14 sq m.
T1168	Field maple *(Acer campestre)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	2	Height (m): 10 2 stems (mm): 110, 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.1	14.00	Radius: 2.1m. Area: 14 sq m.
T1169	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 10 3 stems, avg.(mm): 110 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 3 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	3.0	2.3	17.00	Radius: 2.3m. Area: 17 sq m.
T1170	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 130 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1171	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 160 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1172	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 120 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1173	Common ash *(Fraxinus excelsior)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 13 2 stems (mm): 130, 290 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	3.8	45.00	Radius: 3.8m. Area: 45 sq m.
T1174	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 120, 70 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 4 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	4.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T1175	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 12 2 stems (mm): 160, 140 Spread (m): 2N, 1.5E, 2S, 2W Crown Clearance (m): 4 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	4.0	2.6	21.00	Radius: 2.6m. Area: 21 sq m.
T1176	Pedunculate oak *(Quercus robur)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 12 Stem Diam(mm): 170 Spread (m): 2N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 4 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	4.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1177	Pedunculate oak *(Quercus robur)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 11 Stem Diam(mm): 150 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T1178	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 160 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1179	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T1180	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 12 2 stems (mm): 150, 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.5	20.00	Radius: 2.5m. Area: 20 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1181	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 11 2 stems (mm): 160, 170 Spread (m): 2N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.8	25.00	Radius: 2.8m. Area: 25 sq m.
T1182	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 9 3 stems (mm): 70, 100, 80 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T1183	Pedunculate oak *(Quercus robur)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 110 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	1.3	5.00	Radius: 1.3m. Area: 5 sq m.
T1184	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 160, 90 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1185	Wild cherry *(Prunus avium)*	Remove tree to facilitate construction.	Tree	2	Height (m): 11 2 stems (mm): 150, 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.5	20.00	Radius: 2.5m. Area: 20 sq m.
T1186	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	3	Height (m): 10 3 stems (mm): 100, 100, 160 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.6	21.00	Radius: 2.6m. Area: 21 sq m.
T1187	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	1	Height (m): 10 Stem Diam(mm): 220 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.6	21.00	Radius: 2.6m. Area: 21 sq m.
T1188	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	1	Height (m): 10 Stem Diam(mm): 170 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1189	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 10 2 stems (mm): 180, 140 Spread (m): 1N, 1E, 1.5S, 1W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.7	23.00	Radius: 2.7m. Area: 23 sq m.
T1190	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 9.5 2 stems, avg.(mm): 170 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.9	26.00	Radius: 2.9m. Area: 26 sq m.
T1191	Pedunculate oak *(Quercus robur)*	Remove tree to facilitate construction.	Tree	1	Height (m): 10 Stem Diam(mm): 120 Spread (m): 1.5N, 1.5E, 1S, 1.5W Crown Clearance (m): 4 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	4.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1192	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 10 2 stems (mm): 140, 150 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.5	20.00	Radius: 2.5m. Area: 20 sq m.
T1193	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 10 2 stems (mm): 90, 130 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1194	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	3	Height (m): 8 3 stems (mm): 70, 130, 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.1	14.00	Radius: 2.1m. Area: 14 sq m.
T1195	Field maple *(Acer campestre)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	3	Height (m): 9 3 stems (mm): 100, 50, 80 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1196	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 7 2 stems (mm): 100, 60 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1197	Wild cherry *(Prunus avium)*	Remove tree to facilitate construction.	Tree	2	Height (m): 9 2 stems (mm): 150, 90 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	2.1	14.00	Radius: 2.1m. Area: 14 sq m.
T1197	Wild cherry *(Prunus avium)*	.	Tree	2	Height (m): 9 2 stems (mm): 150, 90 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	2.1	14.00	Radius: 2.1m. Area: 14 sq m.
T1198	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 9 2 stems (mm): 130, 80 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T1199	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	1	Height (m): 9 Stem Diam(mm): 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T1200	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 9.5 2 stems (mm): 130, 130 Spread (m): 1N, 2E, 1S, 1W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1201	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	4	Height (m): 9 4 stems (mm): 120, 100, 180, 110 Spread (m): 3N, 1E, 4S, 3W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Edge of woodland.	C1	1.0	3.1	30.00	Radius: 3.1m. Area: 30 sq m.
T1202	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	1	Height (m): 10 Stem Diam(mm): 240 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.9	26.00	Radius: 2.9m. Area: 26 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1203	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	4	Height (m): 10 4 stems (mm): 140, 170, 170, 140 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	3.7	43.00	Radius: 3.7m. Area: 43 sq m.
T1204	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	1	Height (m): 10 Stem Diam(mm): 140 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T1205	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 10 2 stems (mm): 150, 100 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.5	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1206	Wild cherry *(Prunus avium)*	Remove tree to facilitate construction.	Tree	4	Height (m): 7 4 stems (mm): 140, 170, 170, 140 Spread (m): 2N, 1E, 1S, 1W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	3.7	43.00	Radius: 3.7m. Area: 43 sq m.
T1207	Pedunculate oak *(Quercus robur)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1208	Field maple *(Acer campestre)*	No action required.	Tree	3	Height (m): 9 3 stems (mm): 90, 120, 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.5	20.00	Radius: 2.5m. Area: 20 sq m.
T1208	Field maple *(Acer campestre)*	No action required.	Tree	3	Height (m): 9 3 stems (mm): 90, 120, 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.5	20.00	Radius: 2.5m. Area: 20 sq m.
T1208	Field maple *(Acer campestre)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	3	Height (m): 9 3 stems (mm): 90, 120, 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.5	20.00	Radius: 2.5m. Area: 20 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1209	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 7 Stem Diam(mm): 90 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 4 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	4.0	1.1	4.00	Radius: 1.1m. Area: 4 sq m.
T1210	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 9 3 stems (mm): 70, 90, 120 Spread (m): 0.5N, 0.5E, 0.5S, 0.5W Crown Clearance (m): 4 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	4.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1211	Common hawthorn *(Crataegus monogyna)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 8 Stem Diam(mm): 90 Spread (m): 0.5N, 0.5E, 0.5S, 0.5W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	1.1	4.00	Radius: 1.1m. Area: 4 sq m.
T1212	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 100 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 3 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	3.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1213	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 11 2 stems (mm): 90, 40 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1214	Pedunculate oak *(Quercus robur)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 130 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	5.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1215	Common hawthorn *(Crataegus monogyna)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 160, 160 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Ivy clad.	C1	2.0	2.7	23.00	Radius: 2.7m. Area: 23 sq m.
T1216	Common hawthorn *(Crataegus monogyna)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 110, 140 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Ivy clad.	C1	1.5	2.1	14.00	Radius: 2.1m. Area: 14 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1217	Common hawthorn *(Crataegus monogyna)*	Protect trees with protective barriers - as shown on plans.	Tree	8	Height (m): 9 8 stems, avg.(mm): 80 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Multi stem.	C1	2.0	2.7	23.00	Radius: 2.7m. Area: 23 sq m.
T1218	Common hawthorn *(Crataegus monogyna)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 7 2 stems (mm): 150, 130 Spread (m): 1N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Ivy clad.	C1	2.0	2.4	18.00	Radius: 2.4m. Area: 18 sq m.
T1219	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 9 3 stems (mm): 120, 70, 90 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Ivy clad.	C1	1.5	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1220	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 10 3 stems (mm): 80, 100, 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1221	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 100, 100 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years	Ivy clad.	C1	2.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T1222	Wild cherry *(Prunus avium)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	3	Height (m): 7 3 stems (mm): 140, 150, 100 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.7	23.00	Radius: 2.7m. Area: 23 sq m.
T1222	Wild cherry *(Prunus avium)*	No action required.	Tree	3	Height (m): 7 3 stems (mm): 140, 150, 100 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.7	23.00	Radius: 2.7m. Area: 23 sq m.
T1222	Wild cherry *(Prunus avium)*	No action required.	Tree	3	Height (m): 7 3 stems (mm): 140, 150, 100 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.7	23.00	Radius: 2.7m. Area: 23 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1223	Crack willow *(Salix fragilis)*	Remove tree to facilitate construction.	Tree	3	Height (m): 10 3 stems (mm): 210, 190, 140 Spread (m): 3.5N, 3.5E, 3.5S, 3.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	3.8	45.00	Radius: 3.8m. Area: 45 sq m.
T1224	Field maple *(Acer campestre)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	3	Height (m): 9 3 stems (mm): 140, 70, 80 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.1	14.00	Radius: 2.1m. Area: 14 sq m.
T1224	Field maple *(Acer campestre)*	No action required.	Tree	3	Height (m): 9 3 stems (mm): 140, 70, 80 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.1	14.00	Radius: 2.1m. Area: 14 sq m.
T1224	Field maple *(Acer campestre)*	No action required.	Tree	3	Height (m): 9 3 stems (mm): 140, 70, 80 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.1	14.00	Radius: 2.1m. Area: 14 sq m.
T1225	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 11 2 stems (mm): 170, 140 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.6	21.00	Radius: 2.6m. Area: 21 sq m.
T1226	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 10 2 stems (mm): 130, 150 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.4	18.00	Radius: 2.4m. Area: 18 sq m.
T1227	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 10 3 stems (mm): 90, 140, 180 Spread (m): 2.5N, 2.5E, 2.5S, 2.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.9	26.00	Radius: 2.9m. Area: 26 sq m.
T1228	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	3	Height (m): 10 3 stems (mm): 140, 130, 150 Spread (m): 1N, 2E, 2S, 1W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.9	26.00	Radius: 2.9m. Area: 26 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1229	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	3	Height (m): 10 3 stems (mm): 100, 70, 110 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1230	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	1	Height (m): 9 Stem Diam(mm): 130 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1231	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 8 2 stems (mm): 110, 70 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	3.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1232	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	1	Height (m): 9 Stem Diam(mm): 170 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1233	Wild cherry *(Prunus avium)*	Remove tree to facilitate construction.	Tree	1	Height (m): 11 Stem Diam(mm): 140 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T1234	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	4	Height (m): 10 4 stems (mm): 150, 130, 110, 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	3.0	28.00	Radius: 3.0m. Area: 28 sq m.
T1235	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	1	Height (m): 10 Stem Diam(mm): 120 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1236	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	1	Height (m): 10 Stem Diam(mm): 160 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.9	11.00	Radius: 1.9m. Area: 11 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1237	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 9 2 stems (mm): 80, 110 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1238	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 10 2 stems (mm): 150, 170 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.7	23.00	Radius: 2.7m. Area: 23 sq m.
T1239	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 10 2 stems (mm): 170, 140 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.6	21.00	Radius: 2.6m. Area: 21 sq m.
T1240	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 10 2 stems (mm): 120, 140 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1241	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	3	Height (m): 9 3 stems (mm): 90, 70, 110 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1242	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 11 2 stems (mm): 120, 170 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Partly collapsed from storm damage,	C1	1.5	2.5	20.00	Radius: 2.5m. Area: 20 sq m.
T1243	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 9 2 stems (mm): 110, 80 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1244	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	1	Height (m): 10 Stem Diam(mm): 140 Spread (m): 1.5N, 1.5E, 1.5S, 2W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.7	9.00	Radius: 1.7m. Area: 9 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1245	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 10 2 stems (mm): 130, 90 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1246	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 13 Stem Diam(mm): 180 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1247	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 6 Stem Diam(mm): 120 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Ivy clad.	C1	1.5	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1248	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 160, 170 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Ivy clad.	C1	2.0	2.8	25.00	Radius: 2.8m. Area: 25 sq m.
T1249	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 8 2 stems (mm): 80, 140 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 3 Life Stage: Semi Mature Rem. Contrib.: 20+ Years	Ivy clad.	C1	3.0	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1250	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 180, 110 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Ivy clad.	C1	2.0	2.5	20.00	Radius: 2.5m. Area: 20 sq m.
T1251	Field maple *(Acer campestre)*	No action required.	Tree	2	Height (m): 7 2 stems (mm): 70, 70 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Ivy clad.	C1	2.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1251	Field maple *(Acer campestre)*	No action required.	Tree	2	Height (m): 7 2 stems (mm): 70, 70 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Ivy clad.	C1	2.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1251	Field maple *(Acer campestre)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	2	Height (m): 7 2 stems (mm): 70, 70 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Ivy clad.	C1	2.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1252	Field maple *(Acer campestre)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	1	Height (m): 8 Stem Diam(mm): 130 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1252	Field maple *(Acer campestre)*	No action required.	Tree	1	Height (m): 8 Stem Diam(mm): 130 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1252	Field maple *(Acer campestre)*	No action required.	Tree	1	Height (m): 8 Stem Diam(mm): 130 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1253	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 11 2 stems (mm): 120, 180 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	2.6	21.00	Radius: 2.6m. Area: 21 sq m.
T1254	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 8 2 stems (mm): 90, 70 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.5	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1255	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 8 2 stems (mm): 60, 80 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 3 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	3.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1256	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 10 2 stems (mm): 110, 150 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	3.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1257	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	1	Height (m): 7 Stem Diam(mm): 110 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.3	5.00	Radius: 1.3m. Area: 5 sq m.
T1258	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	3	Height (m): 8 3 stems (mm): 90, 60, 50 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1259	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 9 2 stems (mm): 230, 110 Spread (m): 2.5N, 2.5E, 2.5S, 2.5W Crown Clearance (m): 1.5 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	1.5	3.1	30.00	Radius: 3.1m. Area: 30 sq m.
T1260	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	6	Height (m): 7.5 6 stems, avg.(mm): 100 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	1.0	2.9	26.00	Radius: 2.9m. Area: 26 sq m.
T1261	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 8.5 2 stems (mm): 180, 130 Spread (m): 1N, 1.5E, 1S, 1W Crown Clearance (m): 1 Life Stage: Semi Mature Rem. Contrib.: 20+ Years	Edge of woodland.	C1	1.0	2.7	23.00	Radius: 2.7m. Area: 23 sq m.
T1262	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 7 2 stems (mm): 120, 100 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Edge of woodland.	C1	3.0	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1263	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 10 2 stems (mm): 150, 110 Spread (m): 3N, 1E, 4S, 3W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Edge of woodland.	C1	1.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1264	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	3	Height (m): 9 3 stems (mm): 70, 70, 110 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years	Edge of woodland.	C1	2.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1265	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 10 2 stems (mm): 110, 110 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Edge of woodland.	C1	2.0	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1266	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 7 2 stems (mm): 110, 110 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Edge of woodland.	C1	2.0	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1267	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 9 2 stems (mm): 120, 170 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Edge of woodland.	C1	1.0	2.5	20.00	Radius: 2.5m. Area: 20 sq m.
T1268	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	3	Height (m): 8 3 stems (mm): 140, 150, 110 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Edge of woodland.	C1	1.0	2.8	25.00	Radius: 2.8m. Area: 25 sq m.
T1269	Pedunculate oak *(Quercus robur)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9.5 Stem Diam(mm): 350 Spread (m): 5N, 6.5E, 4S, 1.5W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years	One of 4, possibly sharing the same root system.	B1	1.0	4.2	55.00	Radius: 4.2m. Area: 55 sq m.
T1270	Pedunculate oak *(Quercus robur)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9.5 Stem Diam(mm): 420 Spread (m): 7N, 5E, 1S, 4W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years	One of 4, possibly sharing the same root system.	B1	1.0	5.0	79.00	Radius: 5.0m. Area: 79 sq m.
T1271	Pedunculate oak *(Quercus robur)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9.5 Stem Diam(mm): 320 Spread (m): 5N, 2E, 2S, 5W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years	One of 4, possibly sharing the same root system.	B1	1.0	3.8	45.00	Radius: 3.8m. Area: 45 sq m.
T1272	Pedunculate oak *(Quercus robur)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9.5 Stem Diam(mm): 340 Spread (m): 3N, 3E, 6S, 5W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years	One of 4, possibly sharing the same root system.	B1	1.0	4.1	53.00	Radius: 4.1m. Area: 53 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1273	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 8 2 stems (mm): 100, 160 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Edge of woodland.	C1	2.0	2.3	17.00	Radius: 2.3m. Area: 17 sq m.
T1274	Pedunculate oak *(Quercus robur)*	Remove tree to facilitate construction.	Tree	1	Height (m): 11 Stem Diam(mm): 180 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Edge of woodland.	C1	2.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1275	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	1	Height (m): 9 Stem Diam(mm): 190 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Edge of woodland.	C1	2.0	2.3	17.00	Radius: 2.3m. Area: 17 sq m.
T1276	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	3	Height (m): 9 3 stems (mm): 130, 100, 90 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1277	Pedunculate oak *(Quercus robur)*	Remove tree to facilitate construction.	Tree	1	Height (m): 9 Stem Diam(mm): 270 Spread (m): 2N, 3E, 3S, 3W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Edge of woodland.	C1	1.0	3.2	32.00	Radius: 3.2m. Area: 32 sq m.
T1278	Turkey oak *(Quercus cerris)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 200 Spread (m): 3N, 1E, 2S, 5W Crown Clearance (m): 4.5 Lowest Branch (m): 4.5(W) Rem. Contrib.: 10+ Years	T2m from curb. Too close to adjacent Cherry to warrant a higher retention category. Poof form.	C1	4.5	2.4	18.00	Radius: 2.4m. Area: 18 sq m.
T1278	Turkey oak *(Quercus cerris)*	No action required.	Tree	1	Height (m): 10 Stem Diam(mm): 200 Spread (m): 3N, 1E, 2S, 5W Crown Clearance (m): 4.5 Lowest Branch (m): 4.5(W) Rem. Contrib.: 10+ Years	T2m from curb. Too close to adjacent Cherry to warrant a higher retention category. Poof form.	C1	4.5	2.4	18.00	Radius: 2.4m. Area: 18 sq m.
T1278	Turkey oak *(Quercus cerris)*	No action required.	Tree	1	Height (m): 10 Stem Diam(mm): 200 Spread (m): 3N, 1E, 2S, 5W Crown Clearance (m): 4.5 Lowest Branch (m): 4.5(W) Rem. Contrib.: 10+ Years	T2m from curb. Too close to adjacent Cherry to warrant a higher retention category. Poof form.	C1	4.5	2.4	18.00	Radius: 2.4m. Area: 18 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1278	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 300 Spread (m): 4.5N, 4.5E, 4.5S, 4.5W Crown Clearance (m): 1 Life Stage: Early Mature Rem. Contrib.: 20+ Years	In beey dense bramble. Access to tag or assess base not possible.	C1	1.0	3.6	41.00	Radius: 3.6m. Area: 41 sq m.
T1279	Wild cherry *(Prunus avium)*	Recently felled to ground level.	Tree	1	Height (m): 12 Stem Diam(mm): 630 Spread (m): 8N, 2E, 5S, 6W Crown Clearance (m): 2.5 Lowest Branch (m): 3(SW) Life Stage: Over Mature Rem. Contrib.: 20+ Years	3m from curb.	B1	2.5	7.6	181.00	Radius: 7.6m. Area: 181 sq m.
T1280	Wild cherry *(Prunus avium)*	Recently felled to ground level.	Tree	1	Height (m): 10 Stem Diam(mm): 360 Spread (m): 4N, 4E, 5S, 4W Crown Clearance (m): 2.5 Lowest Branch (m): 3(S) Life Stage: Mature Rem. Contrib.: <10 years	3.5m from curb. Damage to stem.	C1	2.5	4.3	58.00	Radius: 4.3m. Area: 58 sq m.
T1281	Wild cherry *(Prunus avium)*	Recently felled to ground level.	Tree	1	Height (m): 6 Stem Diam(mm): 220 Spread (m): 4N, 4E, 4S, 1W Crown Clearance (m): 2.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years	2,5m from curb. Competition with adjacent tree.	C1	2.5	2.6	21.00	Radius: 2.6m. Area: 21 sq m.
T1282	Wild cherry *(Prunus avium)*	Recently felled to ground level.	Tree	1	Height (m): 5 Stem Diam(mm): 190 Spread (m): 1N, 2.5E, 1.5S, 1W Crown Clearance (m): 2 Lowest Branch (m): 3 Life Stage: Early Mature Rem. Contrib.: <10 years	1.75m from curb. Damage and decay to stem. Leaning toward pedestrian.	U	2.0	2.3	17.00	Radius: 2.3m. Area: 17 sq m.
T1283	Wild cherry *(Prunus avium)*	Recently felled to ground level.	Tree	1	Height (m): 7 Stem Diam(mm): 180 Spread (m): 2N, 2E, 2S, 2.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 10+ Years	4.5m away from curb. Die back in mid and lower crown.	C1	3.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1284	Wild cherry *(Prunus avium)*	Recently felled to ground level.	Tree	2	Height (m): 6 2 stems (mm): 170, 150 Spread (m): 1N, 3E, 3S, 2W Crown Clearance (m): 2.5 Life Stage: Early Mature Rem. Contrib.: 10+ Years	3m from curb. Die back in mid and lower crown.	C1	2.5	2.7	23.00	Radius: 2.7m. Area: 23 sq m.
T1285	Wild cherry *(Prunus avium)*	Recently felled to ground level.	Tree	1	Height (m): 5 Stem Diam(mm): 150 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: <10 years	Damage to stem.	C1	3.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1286	Wild cherry *(Prunus avium)*	Recently felled to ground level.	Tree	2	Height (m): 8 2 stems (mm): 320, 200 Spread (m): 5N, 4.5E, 4.5S, 4W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Crown lifted. Decay in pruning wounds. Conflictwith lamp post.	B1	2.0	4.5	64.00	Radius: 4.5m. Area: 64 sq m.
T1287	Turkey oak *(Quercus cerris)*	Recently felled to ground level.	Tree	1	Height (m): 10 Stem Diam(mm): 250 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 3 Lowest Branch (m): 3(NE) Life Stage: Early Mature Rem. Contrib.: 20+ Years	Stem has irregular form, having grown away from adjacent tree.	B1	3.0	3.0	28.00	Radius: 3.0m. Area: 28 sq m.
T1288	Wild cherry *(Prunus avium)*	Recently felled to ground level.	Tree	1	Height (m): 6 Stem Diam(mm): 250 Spread (m): 1N, 2.5E, 3.5S, 4W Crown Clearance (m): 2 Lowest Branch (m): 2.5(SE) Life Stage: Early Mature Rem. Contrib.: 20+ Years	Dieback in mid and lower crown.	C1	2.0	3.0	28.00	Radius: 3.0m. Area: 28 sq m.
T1289	Turkey oak *(Quercus cerris)*	Recently felled to ground level.	Tree	2	Height (m): 9 2 stems (mm): 250, 340 Spread (m): 5N, 5E, 5S, 5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 40+ Years	Girdling rooy, otherwise good overall form and condition.	B1	2.0	5.1	82.00	Radius: 5.1m. Area: 82 sq m.
T1290	Wild cherry *(Prunus avium)*	Recently felled to ground level.	Tree	1	Height (m): 8 Stem Diam(mm): 410 Spread (m): 5N, 5E, 4S, 5W Crown Clearance (m): 1.5 Lowest Branch (m): 3(E) Life Stage: Mature Rem. Contrib.: 20+ Years	Girdling root. Lower pruning wounds.	B1	1.5	4.9	75.00	Radius: 4.9m. Area: 75 sq m.
T1291	Wild cherry *(Prunus avium)*	Recently felled to ground level.	Tree	1	Height (m): 8 Stem Diam(mm): 320 Spread (m): 4N, 4E, 4S, 4W Crown Clearance (m): 2 Rem. Contrib.: 20+ Years	Lower crown pru ingredients wounds, most have fully occluded. Some minor deadwood, typical of species.	B1	2.0	3.8	45.00	Radius: 3.8m. Area: 45 sq m.
T1292	Scots pine *(Pinus sylvestris)*	Recently felled to ground level.	Tree	1	Height (m): 10 Stem Diam(mm): 240 Spread (m): 4N, 2E, 2.5S, 3.5W Crown Clearance (m): 2 Rem. Contrib.: 40+ Years		B1	2.0	2.9	26.00	Radius: 2.9m. Area: 26 sq m.
T1293	Whitebeam *(Aria edulis)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 4 Stem Diam(mm): 80 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 10+ Years	Retained	C1	1.5	1.0	3.00	Radius: 1.0m. Area: 3 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1294	Whitebeam *(Aria edulis)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 3.5 Stem Diam(mm): 130 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 10+ Years	Retained	C1	1.5	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T1295	Whitebeam *(Aria edulis)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 2.5 Stem Diam(mm): 140 Spread (m): 1N, 1E, 2.5S, 1.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 10+ Years	Retained.	C1	1.5	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T1318	Sycamore *(Acer pseudoplatanus)*	No action required.	Tree	2	Height (m): 13 2 stems (mm): 270, 250 Spread (m): 5N, 5E, 5S, 5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Topped at 3.5m and regrown. Bifurcates at 1.2m. 7m from T1400 and 9m from porch. 0.5m from pavement. 5m from curb.	B1	2.0	4.4	61.00	Radius: 4.4m. Area: 61 sq m.
T1318	Sycamore *(Acer pseudoplatanus)*	Remove tree to facilitate the locker room/extension 5 development.	Tree	2	Height (m): 13 2 stems (mm): 270, 250 Spread (m): 5N, 5E, 5S, 5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Topped at 3.5m and regrown. Bifurcates at 1.2m. 7m from T1400 and 9m from porch. 0.5m from pavement. 5m from curb.	B1	2.0	4.4	61.00	Radius: 4.4m. Area: 61 sq m.
T1319	Norway maple *(Acer platanoides)*	Remove tree as retention will not be sustainable due to the proposed position of extension 5, locker room.	Tree	1	Height (m): 10 Stem Diam(mm): 290 Spread (m): 3N, 3E, 3S, 3W Crown Clearance (m): 2 Rem. Contrib.: 20+ Years	Previously topped at 4m and regrown. 11m from T1400 and 6m from T1320. 2m from curb.	B1	2.0	3.5	38.00	Radius: 3.5m. Area: 38 sq m.
T1320	Common whitebeam *(Sorbus aria)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 12 Stem Diam(mm): 370 Spread (m): 5N, 5E, 5S, 5W Crown Clearance (m): 2 Rem. Contrib.: 20+ Years	2m from curb, 45m from T1319. Previously crown lifted and lifted over a cess road. 12m from corner of building.	B1	2.0	4.4	61.00	Radius: 4.4m. Area: 61 sq m.
T1321	Norway maple *(Acer platanoides)*	No action required.	Tree	1	Height (m): 15 Stem Diam(mm): 480 Spread (m): 6N, 6E, 6S, 6W Crown Clearance (m): 2 Rem. Contrib.: 20+ Years	On bank. Levels around base have been increased since the tree was planted. Clearance over access is 6m. 18m from T 1320, 23m from corner of building. 2m from curb. Previously crown lifted.	B1	2.0	5.8	106.00	Radius: 5.8m. Area: 106 sq m.
T1322	Turkey oak *(Quercus cerris)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 12 Stem Diam(mm): 430 Spread (m): 4N, 4E, 4S, 4W Crown Clearance (m): 2 Lowest Branch (m): 2(S) Life Stage: Early Mature	Pavement heave to south and north. Restricted rooting environment. This is displayed in crown with 10-15% dieback. Previously crown lifted and epicormic shoots have regrown. 2m from curb. 7m from corner of single story brick structure.	B1	2.0	5.2	85.00	Radius: 5.2m. Area: 85 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1400	Silver birch *(Betula pendula)*	No action required.	Tree	1	Height (m): 8 Stem Diam(mm): 220 Spread (m): 3.5N, 3.5E, 3.5S, 3.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Topped and regrown with 4m new shoots. Active birds nest at 3m (pigeon). 2m from curb.	B1	1.5	2.6	21.00	Radius: 2.6m. Area: 21 sq m.
T1400	Silver birch *(Betula pendula)*	No action required.	Tree	1	Height (m): 8 Stem Diam(mm): 220 Spread (m): 3.5N, 3.5E, 3.5S, 3.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Topped and regrown with 4m new shoots. Active birds nest at 3m (pigeon). 2m from curb.	B1	1.5	2.6	21.00	Radius: 2.6m. Area: 21 sq m.
T1400	Silver birch *(Betula pendula)*	Remove tree as retention will not be sustainable due to the proposed position of extension 5, locker room.	Tree	1	Height (m): 8 Stem Diam(mm): 220 Spread (m): 3.5N, 3.5E, 3.5S, 3.5W Crown Clearance (m): 1.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Topped and regrown with 4m new shoots. Active birds nest at 3m (pigeon). 2m from curb.	B1	1.5	2.6	21.00	Radius: 2.6m. Area: 21 sq m.
T1882	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 8 Stem Diam(mm): 120 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1972	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 9 3 stems (mm): 100, 110, 80 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1974	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 180 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T1975	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 220 Spread (m): 3N, 3E, 3S, 3W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.6	21.00	Radius: 2.6m. Area: 21 sq m.
T1976	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 140 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1977	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 170 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1978	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 9 3 stems (mm): 180, 60, 60 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.4	18.00	Radius: 2.4m. Area: 18 sq m.
T1979	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 130, 110 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1980	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 160 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1981	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 10 3 stems (mm): 90, 110, 80 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1982	Wild cherry *(Prunus avium)*	No action required.	Tree	3	Height (m): 9 3 stems (mm): 140, 90, 120 Spread (m): 1N, 2E, 3S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.5	20.00	Radius: 2.5m. Area: 20 sq m.
T1982	Wild cherry *(Prunus avium)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	3	Height (m): 9 3 stems (mm): 140, 90, 120 Spread (m): 1N, 2E, 3S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.5	20.00	Radius: 2.5m. Area: 20 sq m.
T1982	Wild cherry *(Prunus avium)*	No action required.	Tree	3	Height (m): 9 3 stems (mm): 140, 90, 120 Spread (m): 1N, 2E, 3S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.5	20.00	Radius: 2.5m. Area: 20 sq m.
T1983	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 150 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1984	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 140 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T1985	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 110 Spread (m): 2.5N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.3	5.00	Radius: 1.3m. Area: 5 sq m.
T1986	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 11 2 stems (mm): 110, 130 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1987	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 11 3 stems (mm): 180, 180, 190 Spread (m): 4N, 4E, 4S, 4W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	3.8	45.00	Radius: 3.8m. Area: 45 sq m.
T1988	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 11 Stem Diam(mm): 150 Spread (m): 2.5N, 2.5E, 2.5S, 2.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T1989	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 80, 90 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T1990	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 100 Spread (m): 2.5N, 2.5E, 2.5S, 2.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.2	5.00	Radius: 1.2m. Area: 5 sq m.
T1991	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 150, 190 Spread (m): 2.5N, 2.5E, 2.5S, 2.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.9	26.00	Radius: 2.9m. Area: 26 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T1992	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 11 2 stems (mm): 120, 120 Spread (m): 2.5N, 2.5E, 2.5S, 2.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1993	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 160 Spread (m): 2.5N, 2.5E, 2.5S, 2.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1994	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 110, 130 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T1995	Silver birch '90.90' *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 90, 90 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 3 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	3.0	1.5	7.00	Radius: 1.5m. Area: 7 sq m.
T1996	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 11 2 stems (mm): 190, 160 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	3.0	28.00	Radius: 3.0m. Area: 28 sq m.
T1997	Pedunculate oak *(Quercus robur)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 150 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T1998	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 8 2 stems (mm): 140, 80 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T1999	Field maple *(Acer campestre)*	Remove tree to facilitate construction.	Tree	2	Height (m): 10 2 stems (mm): 140, 150 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.5	20.00	Radius: 2.5m. Area: 20 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T2000	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 140, 80 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T3901	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 11 2 stems (mm): 140, 100 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.1	14.00	Radius: 2.1m. Area: 14 sq m.
T3902	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 11 2 stems (mm): 190, 220 Spread (m): 2.5N, 2.5E, 2.5S, 2.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	3.5	38.00	Radius: 3.5m. Area: 38 sq m.
T3903	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 10 3 stems (mm): 100, 110, 70 Spread (m): 2.5N, 2.5E, 2.5S, 2.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T3904	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	4	Height (m): 10 4 stems (mm): 120, 60, 60, 60 Spread (m): 2.5N, 2.5E, 2.5S, 2.5W Crown Clearance (m): 3 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	3.0	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T3905	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 110, 70 Spread (m): 2.5N, 2.5E, 2.5S, 2.5W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T3906	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	5	Height (m): 9 5 stems (mm): 160, 120, 80, 90, 90 Spread (m): 2.5N, 2.5E, 2.5S, 2.5W Crown Clearance (m): 2 Life Stage: Semi Mature Rem. Contrib.: 20+ Years		C1	2.0	3.0	28.00	Radius: 3.0m. Area: 28 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T3907	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 11 3 stems, avg.(mm): 210 Spread (m): 2.5N, 2.5E, 2.5S, 2.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	4.4	61.00	Radius: 4.4m. Area: 61 sq m.
T3908	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 160 Spread (m): 2.5N, 2.5E, 2.5S, 2.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Poor form	C1	3.0	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T3909	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 150, 180 Spread (m): 3N, 3E, 3S, 3W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years	Poor form	C1	3.0	2.8	25.00	Radius: 2.8m. Area: 25 sq m.
T3910	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 150, 70 Spread (m): 3N, 3E, 3S, 3W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T3911	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 120, 90 Spread (m): 3N, 3E, 3S, 3W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T3912	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 120 Spread (m): 3N, 3E, 3S, 3W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T3913	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	5	Height (m): 10 5 stems (mm): 110, 110, 70, 70, 60 Spread (m): 3N, 3E, 3S, 3W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.3	17.00	Radius: 2.3m. Area: 17 sq m.
T3914	Field maple *(Acer campestre)*	No action required.	Tree	5	Height (m): 10 5 stems, avg.(mm): 250 Spread (m): 2.5N, 2.5E, 2.5S, 2.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	6.7	141.00	Radius: 6.7m. Area: 141 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T3914	Field maple *(Acer campestre)*	No action required.	Tree	5	Height (m): 10 5 stems, avg.(mm): 250 Spread (m): 2.5N, 2.5E, 2.5S, 2.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	6.7	141.00	Radius: 6.7m. Area: 141 sq m.
T3914	Field maple *(Acer campestre)*	Fell tree to facilitate the proposed new access road and/or retaining structure.	Tree	5	Height (m): 10 5 stems, avg.(mm): 250 Spread (m): 2.5N, 2.5E, 2.5S, 2.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	6.7	141.00	Radius: 6.7m. Area: 141 sq m.
T3915	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 100, 50 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.3	5.00	Radius: 1.3m. Area: 5 sq m.
T3916	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 10 3 stems (mm): 140, 90, 80 Spread (m): 3N, 3E, 3S, 3W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T3917	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	5	Height (m): 10 5 stems (mm): 120, 90, 110, 100, 50 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.6	21.00	Radius: 2.6m. Area: 21 sq m.
T3918	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 200, 180 Spread (m): 3N, 3E, 3S, 3W Crown Clearance (m): 2.5 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.5	3.2	32.00	Radius: 3.2m. Area: 32 sq m.
T3919	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 140, 140 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.4	18.00	Radius: 2.4m. Area: 18 sq m.
T3920	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 130, 120 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.1	14.00	Radius: 2.1m. Area: 14 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T3921	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 120, 70 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.7	9.00	Radius: 1.7m. Area: 9 sq m.
T3922	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 120, 60 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T3923	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems (mm): 110, 100 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T3924	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 120 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T3925	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 9 2 stems, avg.(mm): 130 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T3926	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 190 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.3	17.00	Radius: 2.3m. Area: 17 sq m.
T3927	Silver birch *(Betula pendula)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 130 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.6	8.00	Radius: 1.6m. Area: 8 sq m.
T3928	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 210 Spread (m): 3N, 3E, 3S, 3W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.5	20.00	Radius: 2.5m. Area: 20 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T3929	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 10 Stem Diam(mm): 150 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T3930	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 11 Stem Diam(mm): 180 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.2	15.00	Radius: 2.2m. Area: 15 sq m.
T3931	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 130, 170 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.6	21.00	Radius: 2.6m. Area: 21 sq m.
T3932	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 9 Stem Diam(mm): 110 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.3	5.00	Radius: 1.3m. Area: 5 sq m.
T3933	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 11 Stem Diam(mm): 150 Spread (m): 1.5N, 1.5E, 1.5S, 1.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.
T3934	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 8 2 stems (mm): 90, 70 Spread (m): 3N, 3E, 3S, 3W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.4	6.00	Radius: 1.4m. Area: 6 sq m.
T3935	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 9 3 stems, avg.(mm): 250 Spread (m): 3N, 3E, 3S, 3W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	5.2	85.00	Radius: 5.2m. Area: 85 sq m.
T3936	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 7 3 stems (mm): 90, 150, 150 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.8	25.00	Radius: 2.8m. Area: 25 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T3937	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 6 Stem Diam(mm): 110 Spread (m): 1N, 1E, 1S, 1W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	1.3	5.00	Radius: 1.3m. Area: 5 sq m.
T3938	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	1	Height (m): 11 Stem Diam(mm): 170 Spread (m): 1N, 1.5E, 1S, 1W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T3939	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 11 2 stems (mm): 140, 80 Spread (m): 3.5N, 3.5E, 3.5S, 3.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years	2 stems	C1	3.0	1.9	11.00	Radius: 1.9m. Area: 11 sq m.
T3940	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 11 3 stems (mm): 160, 130, 140 Spread (m): 3.5N, 3.5E, 3.5S, 3.5W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	3.0	28.00	Radius: 3.0m. Area: 28 sq m.
T3941	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 11 2 stems (mm): 120, 120 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 3 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	3.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T3942	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 10 3 stems (mm): 80, 210, 180 Spread (m): 4N, 4E, 4S, 4W Crown Clearance (m): 2 Rem. Contrib.: 20+ Years	3 stems	C1	2.0	3.5	38.00	Radius: 3.5m. Area: 38 sq m.
T3957	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	3	Height (m): 10 3 stems (mm): 100, 110, 80 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.0	13.00	Radius: 2.0m. Area: 13 sq m.
T3975	Field maple *(Acer campestre)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems (mm): 90, 120 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	1.8	10.00	Radius: 1.8m. Area: 10 sq m.

Ref.	Species	Recommendation	Structure	Num. Stems	Measurements	Survey Notes	Retention Category	Crown Clearance (m)	RPA Radius	RPA Area	RPA
T3976	Wild cherry *(Prunus avium)*	Protect trees with protective barriers - as shown on plans.	Tree	2	Height (m): 10 2 stems, avg.(mm): 170 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years		C1	2.0	2.9	26.00	Radius: 2.9m. Area: 26 sq m.
W001	Mixed species *(Mixed species)*	Protect trees with protective barriers - as shown on plans.	Group	1	Height (m): 10 Stem Diam(mm): 100 Spread (m): 2N, 2E, 2S, 2W Crown Clearance (m): 2 Life Stage: Early Mature Rem. Contrib.: 20+ Years	This woodland group is a continuation of the trees recorded as individuals in the survey area. Species and age range are similar to those surveyed individually. The group is located outside of the security chainlink fence and continues to the north.	C2	2.0	0.0	9934.00	Area: 9934 sq m.

Table 1 **Cascade chart for tree quality assessment**

Category and definition	Criteria (including subcategories where appropriate)			Identification on plan
Trees unsuitable for retention (see Note)				
Category U Those in such a condition that they cannot realistically be retained as living trees in the context of the current land use for longer than 10 years	• Trees that have a serious, irremediable, structural defect, such that their early loss is expected due to collapse, including those that will become unviable after removal of other category U trees (e.g. where, for whatever reason, the loss of companion shelter cannot be mitigated by pruning) • Trees that are dead or are showing signs of significant, immediate, and irreversible overall decline • Trees infected with pathogens of significance to the health and/or safety of other trees nearby, or very low quality trees suppressing adjacent trees of better quality *NOTE Category U trees can have existing or potential conservation value which it might be desirable to preserve; see 4.5.7.*			See Table 2
	1 Mainly arboricultural qualities	**2 Mainly landscape qualities**	**3 Mainly cultural values, including conservation**	
Trees to be considered for retention				
Category A **Trees of high quality** with an estimated remaining life expectancy of at least 40 years	Trees that are particularly good examples of their species, especially if rare or unusual; or those that are essential components of groups or formal or semi-formal arboricultural features (e.g. the dominant and/or principal trees within an avenue)	Trees, groups or woodlands of particular visual importance as arboricultural and/or landscape features	Trees, groups or woodlands of significant conservation, historical, commemorative or other value (e.g. veteran trees or wood-pasture)	See Table 2
Category B **Trees of moderate quality** with an estimated remaining life expectancy of at least 20 years	Trees that might be included in category A, but are downgraded because of impaired condition (e.g. presence of significant though remediable defects, including unsympathetic past management and storm damage), such that they are unlikely to be suitable for retention for beyond 40 years; or trees lacking the special quality necessary to merit the category A designation	Trees present in numbers, usually growing as groups or woodlands, such that they attract a higher collective rating than they might as individuals; or trees occurring as collectives but situated so as to make little visual contribution to the wider locality	Trees with material conservation or other cultural value	See Table 2
Category C **Trees of low quality** with an estimated remaining life expectancy of at least 10 years, or young trees with a stem diameter below 150 mm	Unremarkable trees of very limited merit or such impaired condition that they do not qualify in higher categories	Trees present in groups or woodlands, but without this conferring on them significantly greater collective landscape value; and/or trees offering low or only temporary/transient landscape benefits	Trees with no material conservation or other cultural value	See Table 2


© The British Standards Institution 2012

Appendix B

Tree Constraints Plan

Plan showing constraints imposed on development layout by trees considered during the design process.

Symbol Guide



- Root Protection Area
- Canopy Spread
- Tree Position, (colour represents retention category)
- Tag Number

BS5837:2012 - Tree Category

Category A Trees High Quality	Category C Trees Low Quality
Category B Trees Moderate Quality	Category U Trees Poor Quality/ Remove

TREE 21
Tree Surveys & Consultancy Services

Project Name:	Ardagh Metal Packaging
Drawing Title:	Tree Constraints Plan
Drawing Number:	260522-1.1-AMP-TCP-LH
Client:	Ardagh Metal Packaging
Agent:	TACP Architects
Date:	May 2026
Scale:	1:500 @ A1

Recently felled and removed

T1278 T1279 T1280 T1281 T1282 T1283 T1284 T1285 T1286 T1287 T1288 T1289 T1290 T1291 T1292 T1293 T1294 T1295 T1318 T1319 T1320 T1321 T1322 T1400 G003

Appendix C

Tree Protection Retention & Removal Plan

Plan showing Trees Proposed for Removal and General Arrangement with Notes on Tree Protection.

Area to the east of this point has not been surveyed or included in this assessment.

The ground between the tree protection barrier and the retaining wall will be protected to prevent soil compaction during the works. See the Arboricultural Method Statement for details.

Potential minor impact in the RPA of T1269 and T1270, during excavation works and installation of the retaining wall. The initial excavations will be monitored by the Arboricultural Consultant, who will ensure the impact is minimised and provide suitable mitigation measures, as detailed in the Arboricultural Method Statement.

These trees are proposed for removal as their final position in relation to the proposed locker room (extension 5) will not be sustainable. New trees will be planted elsewhere to compensate for their loss.

Recently felled and removed

Symbol Guide

- Root Protection Area
- Canopy Spread
- Tree Position, (colour represents retention category)
- Tag Number

T03

BS5837:2012 - Tree Category

- Category A Trees High Quality
- Category B Trees Moderate Quality
- Category C Trees Low Quality
- Category U Trees Poor Quality/ Remove

Tree Protection & Removal

- Proposed Tree Removal
- Tree Protection Fencing


TREE 21
Tree Surveys & Consultancy Services

Project Name:	Ardagh Metal Packaging
Drawing Title:	Tree Protection, Retention & Removal Plan
Drawing Number:	260531-1.1-AMP-TPRRP-LH
Client:	Ardagh Metal Packaging
Agent:	TACP Architects
Date:	May 2026
Scale:	1:500 @ A1

Appendix D

Proposed Development Layout


Illustrative information on the proposed layout which has been provided to inform this assessment

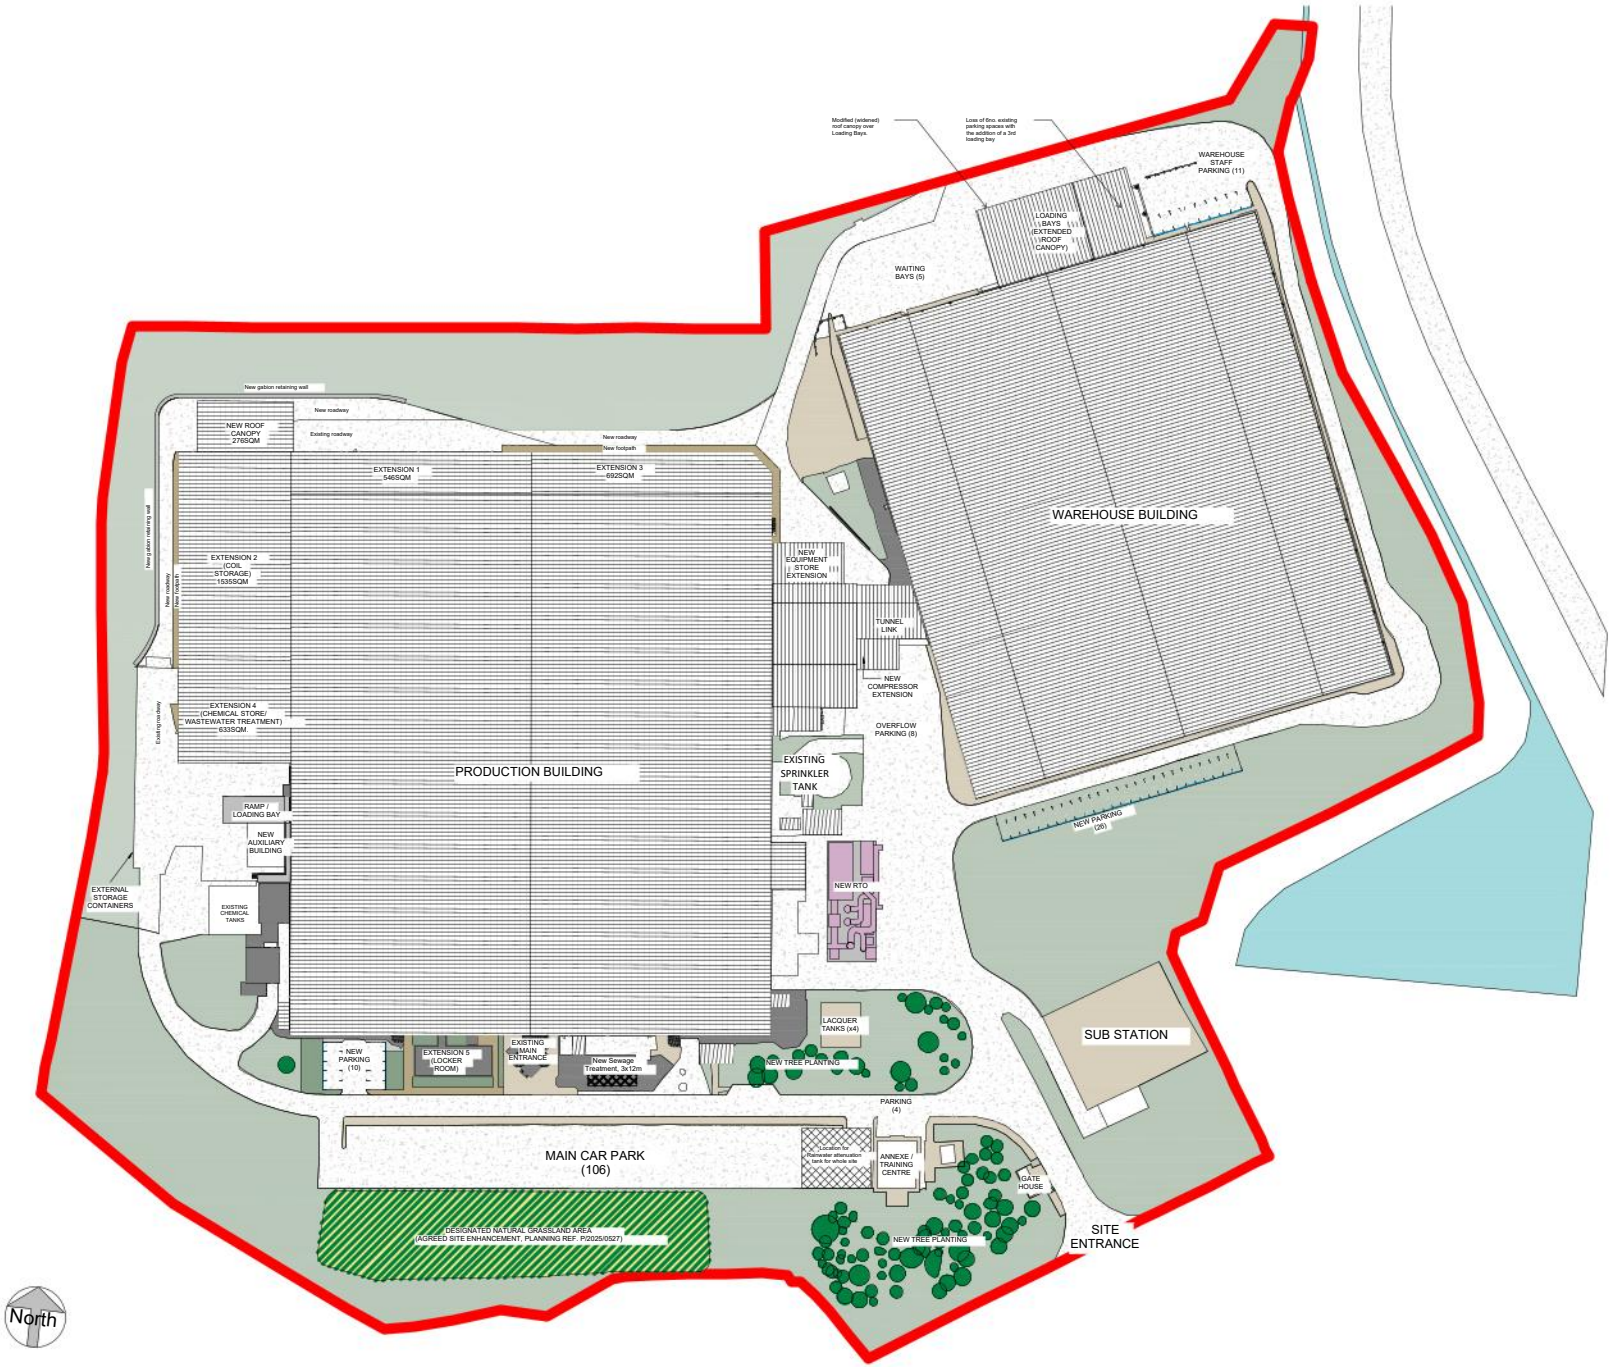
Modified (widened) roof canopy over Loading Bays.
Loss of 6no. existing parking spaces with the addition of a 3rd loading bay
WAREHOUSE STAFF PARKING (11)
LOADING BAYS (EXTENDED ROOF CANOPY)
WAITING BAYS (5)
WAREHOUSE BUILDING
New gabion retaining wall
New roadway
Existing roadway
New roadway
New footpath
NEW ROOF CANOPY 276SQM
EXTENSION 1 546SQM
EXTENSION 3 692SQM
EXTENSION 2 (COIL STORAGE) 1535SQM
NEW EQUIPMENT STORE EXTENSION
TUNNEL LINK
NEW COMPRESSOR EXTENSION
OVERFLOW PARKING (8)
EXTENSION 4 (CHEMICAL STORE/ WASTEWATER TREATMENT) 633SQM
PRODUCTION BUILDING
EXISTING SPRINKLER TANK
NEW PARKING (26)
RAMP / LOADING BAY
NEW AUXILIARY BUILDING
EXTERNAL STORAGE CONTAINERS
EXISTING CHEMICAL TANKS
NEW RTO
LACQUER TANKS (x4)
SUB STATION
NEW PARKING (10)
EXTENSION 5 (LOCKER ROOM)
EXISTING MAIN ENTRANCE
New Sewage Treatment, 3x12m
NEW TREE PLANTING
PARKING (4)
MAIN CAR PARK (106)
Location for Rainwater attenuation tank for whole site
ANNEXE / TRAINING CENTRE
GATE HOUSE
DESIGNATED NATURAL GRASSLAND AREA (AGREED SITE ENHANCEMENT, PLANNING REF. P/2025/0527)
NEW TREE PLANTING
SITE ENTRANCE
North

Appendix E

Tree Protection Measures

Illustrative information on proposed tree protection measures to be installed as set out on the Tree Protection Plan

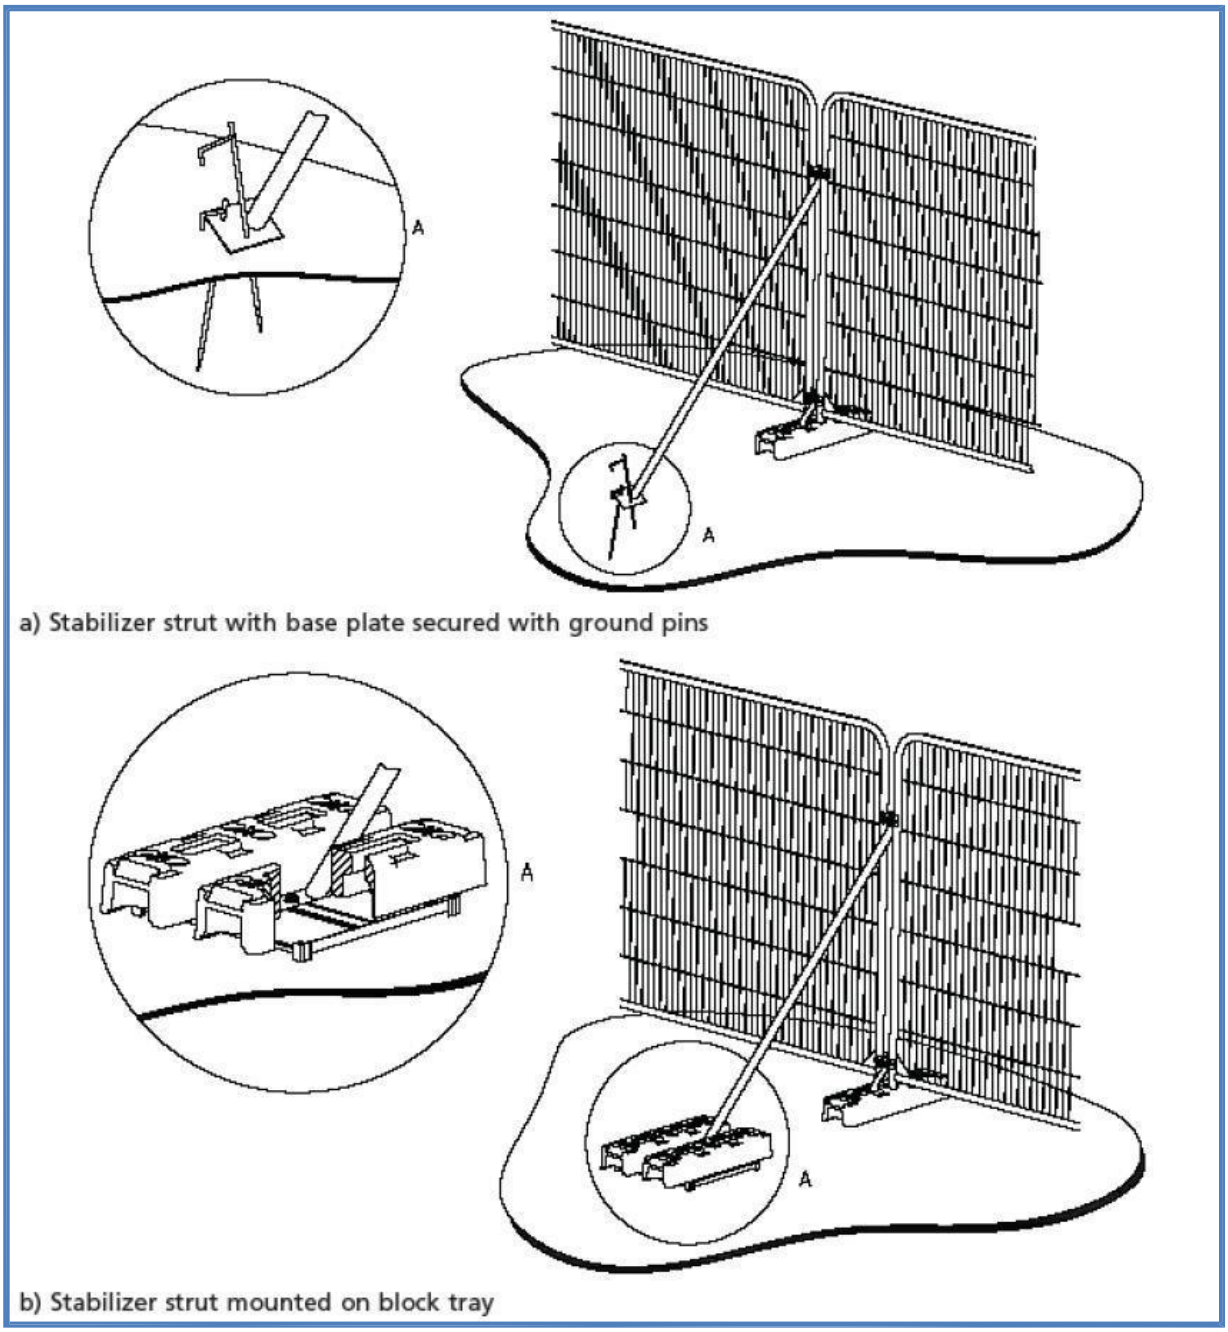

BS5837: 2012 - Figure 3 – Examples of Above Ground Stabilisation Systems



Example Tree Protection Fencing Sign

End of report



www.tree21.co.uk