PLANT SCHEDULE: TREES

Category	Form	Quantity	Botanical Name	Girth	Height	Clear Stem	Other
Tree	Light Standard	5	Acer campestre	6-8cm	1.5-1.75m		Bare Root
Tree	Light Standard	2	Alnus glutinosa	6-8cm	1.5-1.75m		Bare Root
Tree	Light Standard	5	Crataegus monogyna	6-8cm	1.5-1.75m		Bare Root
Tree	Light Standard	2	Prunus avium	6-8cm	1.5-1.75m		Bare Root
Tree	Light Standard	3	Quercus robur	6-8cm	1.5-1.75m		Bare Root
Tree	Light Standard	2	Sorbus aucuparia	6-8cm	1.5-1.75m		Bare Root
Tree	Standard	7	Acer campestre	8-10cm	2.5-2.75m	2m	Root Balled or Pot Grown
Tree	Standard	8	Alnus glutinosa	8-10cm	2.5-2.75m	2m	Root Balled or Pot Grown
Tree	Standard	4	Betula pendula	8-10cm	2.5-2.75m	2m	Root Balled or Pot Grown
Tree	Standard	2	Carpinus betulus	8-10cm	2.5-2.75m	2m	Root Balled or Pot Grown
Tree	Standard	6	Corylus avellana	8-10cm	2.5-2.75m	2m	Root Balled or Pot Grown
Tree	Standard	9	Crataegus monogyna	8-10cm	2.5-2.75m	2m	Root Balled or Pot Grown
Tree	Standard	2	Prunus avium	8-10cm	2.5-2.75m	2m	Root Balled or Pot Grown
Tree	Standard	1	Prunus padus	8-10cm	2.5-2.75m	2m	Root Balled or Pot Grown
Tree	Standard	4	Pyrus ' Chanticleer'	8-10cm	2.5-2.75m	2m	Root Balled or Pot Grown
Tree	Standard	13	Quercus robur	8-10cm	2.5-2.75m	2m	Root Balled or Pot Grown
Tree	Standard	1	Salix caprea	8-10cm	2.5-2.75m	2m	Root Balled or Pot Grown
Tree	Standard	1	Salix fragilis	8-10cm	2.5-2.75m	2m	Root Balled or Pot Grown
Tree	Standard	5	Sorbus aucuparia	8-10cm	2.5-2.75m	2m	Root Balled or Pot Grown
		TOTAL					
Tree		82					


PLANT SCHEDULE: HEDGEROWS

Category	Form	Count	Botanical Name	Height	Specification
		0			
Shrub	Bare Root	285	Crataegus monogyna	40-60cm	1+1 Transplant
Shrub	Bare Root	159	Corylus avellana	40-60cm	1+1 Transplant
Shrub	Bare Root	63	Viburnum opulus	40-60cm	1+1 Transplant
Shrub	Branched 2 breaks	32	Sambucus nigra	40-60cm	2l Pot Grown
Shrub	Bare Root	32	Alnus glutinosa	40-60cm	1+1 Transplant
Shrub	Bushy; 3 breaks	31	Ilex aquifolium	40-60cm	3l Pot Grown
Shrub	Bare Root	32	Rosa canina	40-60cm	1+1 Transplant

PLANT SCHEDULE: LANDSCAPE AREAS

Landscape Area	Form	Count	Botanical Name	Size	Height	Specification
Aquatic Marginal Grass		0				
		277	EP1 Pond Edge Mixture	4 g per sq/m	(1 count = 1m2)	Supplied by EMORSGATE
Aquatic Marginal Mix		0				
		27	Caltha palustris	1 ltr c/g		Full Pot
		17	Juncus effusus	2 ltr c/g		Full Pot
		27	Juncus inflexus	2 ltr c/g		Full Pot
		17	Lythrum salicaria	1 ltr c/g		Full Pot
		9	Mentha aquatica	1 ltr c/g		Full Pot
		17	Myosotis scorpioides	1 ltr c/g		Full Pot
		17	Ranunculus flammula	1 ltr c/g		Full Pot
		27	Sparganium erectum	1 ltr c/g		Full Pot
		17	Veronica beccagunga	1 ltr c/g		Full Pot
Euonymus Hedge		0				
		333	Euonymus 'Jean Hugues'	3 ltr c/g		Specification
Native Thicket Mix		0				
	Bare Root	262	Cornus sanguinea		40-60cm	1+1 Transplant
	Bare Root	394	Corylus avellana		40-60cm	1+1 Transplant
	Bare Root	1312	Crataegus monogyna		40-60cm	1+1 Transplant
	Bare Root	131	Rosa canina		40-60cm	1+1 Transplant
	Bare Root	394	Salix caprea		40-60cm	1+1 Transplant
	3L Shrub	131	Viburnum lantana	3 ltr c/g	30-40cm	Branched; 4 Breaks
Ornamental Planting		0				
	3L Grass	65	Carex testacea 'Prairie Fire'	3 ltr c/g		Full Pot
	3L Grass	98	Deschampsia cespitosa	3 ltr c/g		Full Pot
	3L Shrub	131	Hebe rakaiensis	3 ltr c/g		Bushy; 5 Breaks; 20-30cm dia.
	3L Shrub	131	Lonicera ligustrina var. pileata	3 ltr c/g		Bushy; 6 Breaks;30-40cm Dia.
	3L Shrub	98	Spiraea 'Shirobana'	3 ltr c/g	30-40cm	Bushy; 6 Breaks
	3L Shrub	131	Viburnum tinus	3 ltr c/g	30-40cm	Bushy; 4 Breaks; 3L Pot Grown
Ornamental Planting		0				
	2L Grass	321	Anemanthele lessoniana	2 ltr c/g		Full Pot
Traditional Hay Meadow Seed Mixture		0				
		2477	RE1 Traditional Hay Meadow	5 g seed per sq/m	(1 count = 1m2)	Supplied by GERMINAL
TOTALS						
Aquatic Marginal Grass		0				
		277				
Aquatic Marginal Mix		0				
		175				
Euonymus Hedge		0				
		333				
Native Thicket Mix		0				
		0				
Native Thicket Mix		0				
		2624				
Ornamental Planting		0				
		654				
Ornamental Planting		0				
		321				
Traditional Hay Meadow Seed Mixture		0				
		2477				

Native Thicket Planting 1:200

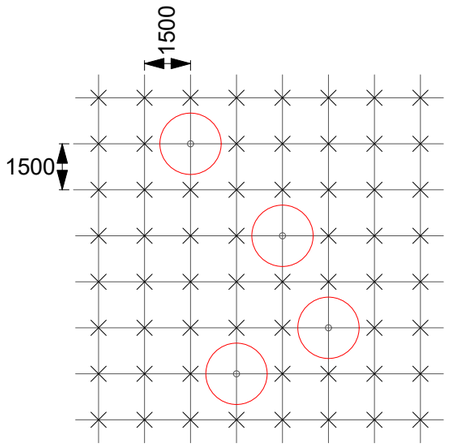


Native thicket mix transplants

Proposed Standard trees

Planted on a 1.5m grid, with transplants in groups of 5-9 of the same species to create a natural random form. Planting grid to be set at 45 degrees to the linear planting line (north-south) to create an offset matrix pattern to avoid a grid at right angles.

Native Hedgerow Planting 1:100

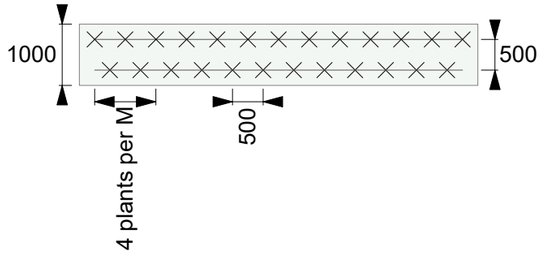

1m wide hedge, planted in a double staggered row at 0.5m spacing; 0.5m between rows; 4/m.

28/01/2026	4		Revised Layout and minor planting specification changes
20/01/2026	3	CB	Building Layout Update
26/11/2024	2	CB	Post & Rail fence changes

Date	Original size	Scale	Drawn by	Checked by	Rev
03/02/2026	A3	1:350	CB	JK	V6

Drawing no
1059-01-NLD.151 Bryn Lane South

Status
S4

Drawing Title
Soft Landscape Design

Sheet Name
Plant Schedule

Location
Bryn Lane South, Wrexham

Client name
Net World Sports

Nicholsons is a trading name of Nicholsons Nurseries Ltd. The Park, North Aston, Bicester, Oxfordshire. OX25 6HL.
T +44 (0)1869 340342 www.nicholsonsgb.com | Company No. 04820053

NICHOLSONS