

Extract Plan 01 - Phase 2B
1:500




1 Example of Colored Tarmac in buff color path with British Standard Kerbs edging

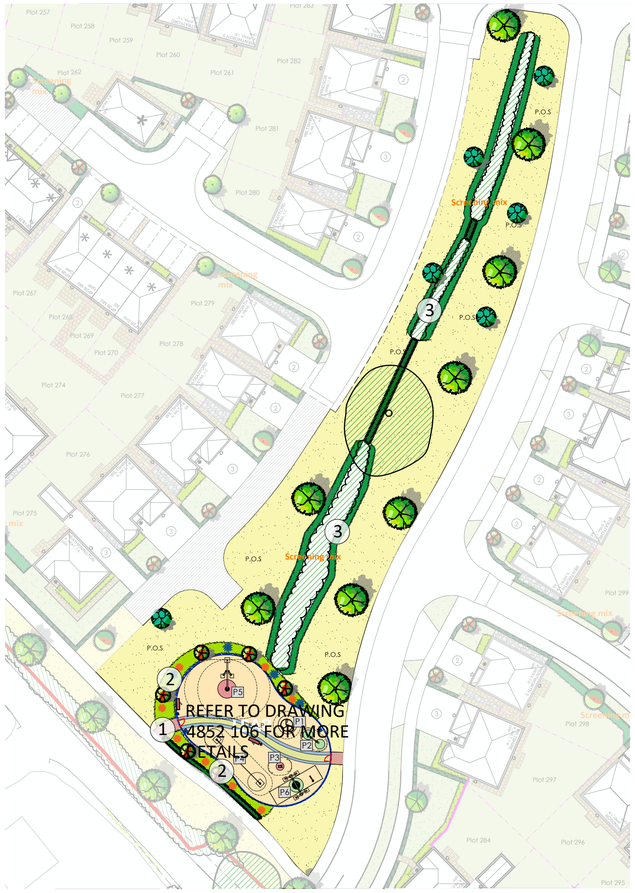

2 Sensory&Wildlife Friendly Planting along Play Area

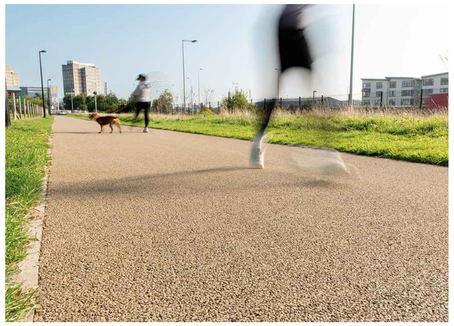

3 Precedent of Ecological Area for Wildlife



**GENERAL NOTES**

1. This drawing is the copyright of TPM Landscape Ltd and cannot be reproduced in any form without the consent of the company.
2. This drawing is to be read in conjunction with detail landscape drawings, details and specification.
3. This drawing is to be read in conjunction with all relevant Architects', Engineer's, Specialists, Bills of Quantities and Specifications.
4. The insertion of any firm or proprietary brand on this drawing is an indication of the class or quality required and does not exclude the use of alternative materials that are equal in performance, quality and appearance, provided that they have been approved in writing by the Landscape Architect.
5. The Contractor is responsible for accurately ascertaining the position of underground services and responding to all relevant service easement requirements.
6. All dimensions are in millimetres unless stated otherwise, for the purposes of construction this drawing must not be scaled and only written dimensions used. Written and scaled dimensions to be checked on site, any discrepancies reported prior to work commencing. IF IN DOUBT PLEASE ASK.
7. All work and materials are to be in accordance with the relevant British Standards and Code of Practice.
8. All Proprietary products are to be used strictly in accordance with the manufacturer's instructions and details.

**LEGEND**

**SOFT LANDSCAPE**

**Trees and Hedgerow to be Retained**

**Proposed POS Tree**
Trees to be planted as 18-20cm girth, Semi-mature, min 6m high, to be staked and secured with suitable rubber ties.

**Proposed Small Tree**
Trees to be planted as 10-12cm girth, 2-3m high and secured with single stake and suitable rubber ties.

**Proposed Native Trees**
Trees to be planted as 14-16cm, Extra-heavy Standard, 3-4m high, to be staked and secured with suitable rubber ties.

**Proposed POS Grass**
Species rich grassland in POS area to be seeded. Note: To be managed through regular grass cut

**Proposed Ornamental Planting**
Mixed shrub and herbaceous planting, 3-5L pots with 10-15L specimens. Planting beds to receive 75mm depth ornamental bark mulch.

**Proposed Formal Hedge**
Evergreen hedge.

**Proposed Native Hedge**
Planted as a double staggered row.

**HARD LANDSCAPE AND FEATURES**

**Proposed Main Footpath (2m wide)**
To be surfaced with coloured tarmac.

Extract Plan 02 - Phase 1
1:250





1 Main Entrance Planting Idea




2 Colorful Planting Idea for Main Entrance



3 Open Lawn-to open the view and access

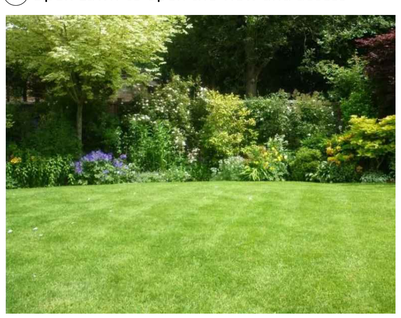

Location Plan

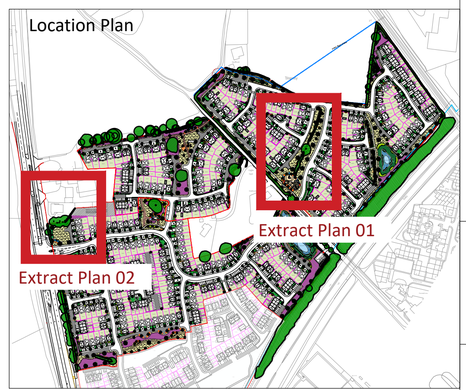


**REVISION NOTES**

| Rev | By | Description | Date |
|---|---|---|---|
| F | EC | Updated in line with latest layout | 19.06.26 |
| E | EC | Updated in line with latest layout | 16.06.26 |
| D | EC | Updated in line with latest layout | 22.05.26 |
| C | EC | Updated in line with latest layout | 06.05.26 |
| B | TS | Updated in line with client comments | 29.07.25 |

Client
Castle Green

Project
Stansty Road, Wrexham

Description
POS Areas in Phase 1 and Phase 2 Details (3 of 5)

Status
For Approval

| Scale @ A1 | Drawn | Checked | Date |
|---|---|---|---|
| 1:250 | TS | CT | 08.07.25 |

| Job number | Drawing number | Revision |
|---|---|---|
| 4852 | 110 | F |

tpm landscape
chartered landscape architects
address: 4th Floor Studio 10 Little Lever St Manchester M1 1HR
tel: 0161 235 0600 fax 0601 email info@tpmlandscape.co.uk