andrew hannett limited
civil | structural | architectural
Mobile **07761 346542** e-mail **ah.ltd@gmx.com**

Land at Alma Road, Froncysyllte

Stepped Access

STRUCTURAL SKETCHES


June 2026

Job No. 2026/084

SCHEME


Land at Alma Road, Froncysyllte

Stepped Access

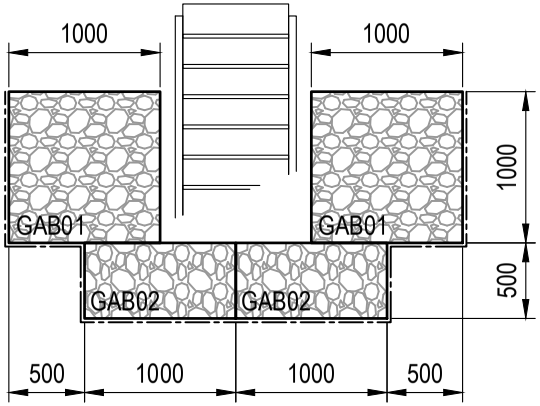


PLAN ON BOTTOM LAYER

Scale 1:50

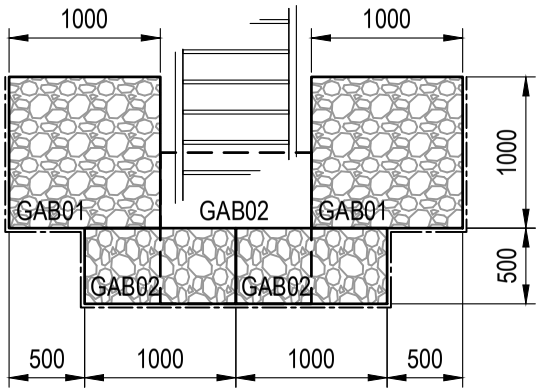

PLAN ON MIDDLE LAYER

Scale 1:50

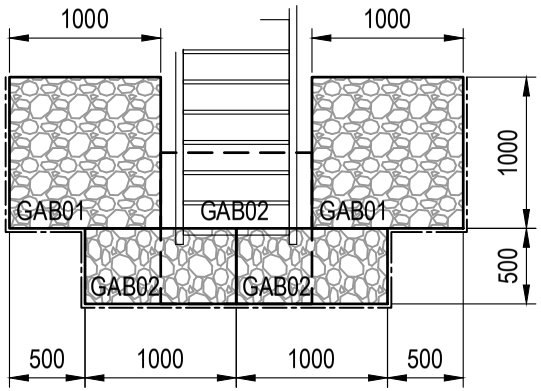

PLAN ON TOP LAYER

Scale 1:50

KEY:

GAB01 - 1000 x 1000 x 1000mm gabion basket (10 off required).

GAB01 - 1000 x 1000 x 500mm gabion basket (10 off required).

NOTE:

Compact formation prior to laying baskets. Infill any soft spots with compacted MOT Type 1 granular material.

Prepared by	AH
Checked by	
	06/26

PAGE No. SK01


SCHEME

PAGE No.	SK02

Land at Alma Road, Froncysyllte

Stepped Access


Prepared by	AH	06/26
Checked by		

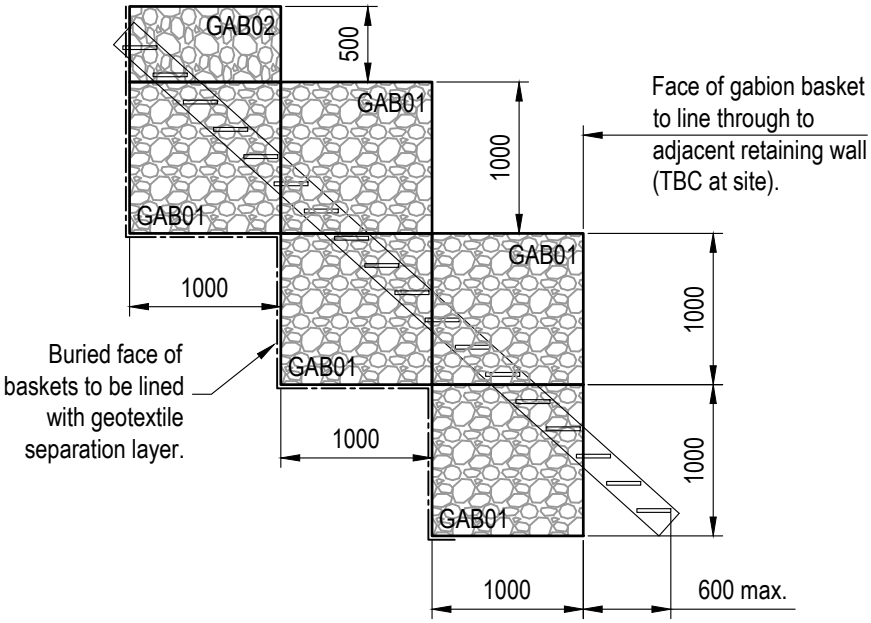

SECTION THROUGH SIDE WALLS

Scale 1:50

NOTE:
Compact formation prior to laying baskets. Infill any soft spots with compacted MOT Type 1 granular material.

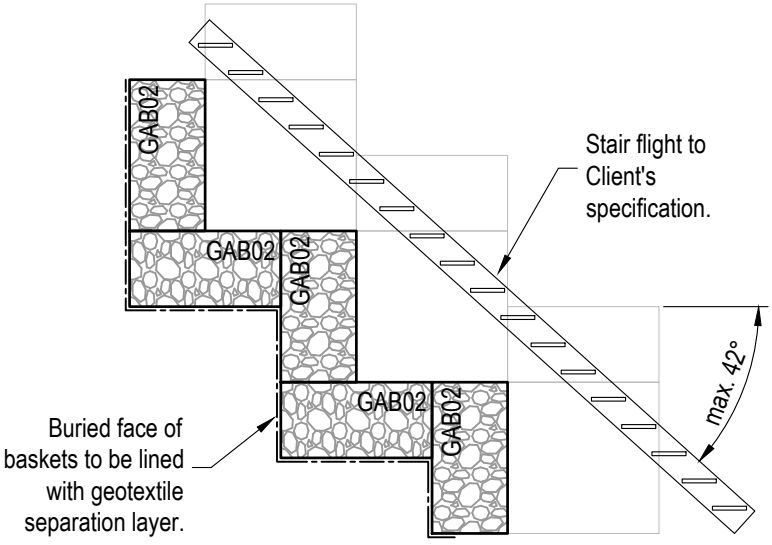

SECTION ALONG CENTRELINE

Scale 1:50

SCHEME

Page No.	SK03	
	Initials	**Date**
Prepared by	AH	09/20
Checked by		

Land at Alma Road, Froncysyllte

Stepped Access

NOTES/SPECIFICATION

ALL DIMENSIONS, BEAM SPANS AND MEMBER LENGTHS ARE FOR THE PURPOSES OF CALCULATION ONLY AND SHOULD NOT BE RELIED UPON FOR THE ORDERING OF MATERIALS. THE SUPPLIER OR CONTRACTOR SHOULD CHECK THE LENGTHS OF ALL MEMBERS (INCLUDING ALLOWANCES FOR BEARINGS) PRIOR TO PLACING ORDERS.

General

1. The Structural Design Report is based on information provided by the Architect or on the assumptions as set out within. Should any variation between the information provided or assumed conditions be identified, they should be brought to the attention of the Project Architect or Structural Engineer as soon as possible.
2. All dimensions in millimetres unless noted otherwise. All dimensions shall be checked by the Contractor prior to commencement and any discrepancies brought to the attention of the Project Architect or Structural Engineer as soon as possible.

Gabion Basket Retaining Wall

3. MANUFACTURE - Gabions shall be manufactured from a hard drawn steel wire formed into a bi-axial mesh grid by electrically welding the cross wires at every intersection. Gabions are to be factory assembled with stainless steel clips connecting side panels and diaphragms to the base panel.
4. MESH SIZE - Mesh openings shall be square and of a nominal dimension of 76.2mm on the grid.
5. MESH WIRE - Nominal wire diameter shall be 3.0mm to BS 1052.
6. CORROSION PROTECTION - Wire shall be triple life (95% Zinc 5% Aluminium) coated.
7. JOINTING - Gabions shall be provided with lacing wire for site assembly. Lacing wire shall be of minimum 2.2mm wire diameter all in accordance with the corrosion protection specified for final jointing.
8. ROCKFILL - Gabion fill shall be a hard durable and non-frost susceptible rock or stone type having a minimum dimension not less than the mesh opening and a maximum dimension of 200mm.
9. CONSTRUCTION - All rockfill shall be packed tightly to minimize voids and the rockfill on the exposed face of the gabion is to be hand packed. Internal windlass bracing ties 2 per 1sqm at 1/3rd points vertically and mid-point horizontally on 1m deep units and at mid height and mid-point horizontally on 0.5m deep units. Adjacent units to be jointed by continuous lacing on the vertical and to the horizontal joints at front and rear of coursing joints. Units shall be filled such that the mesh lid bears onto the rock fill. The lid shall be wired down on all joints and across the diaphragms.