


Tree Protection Plan

Ingledene, Marford Hill LL12 8LF

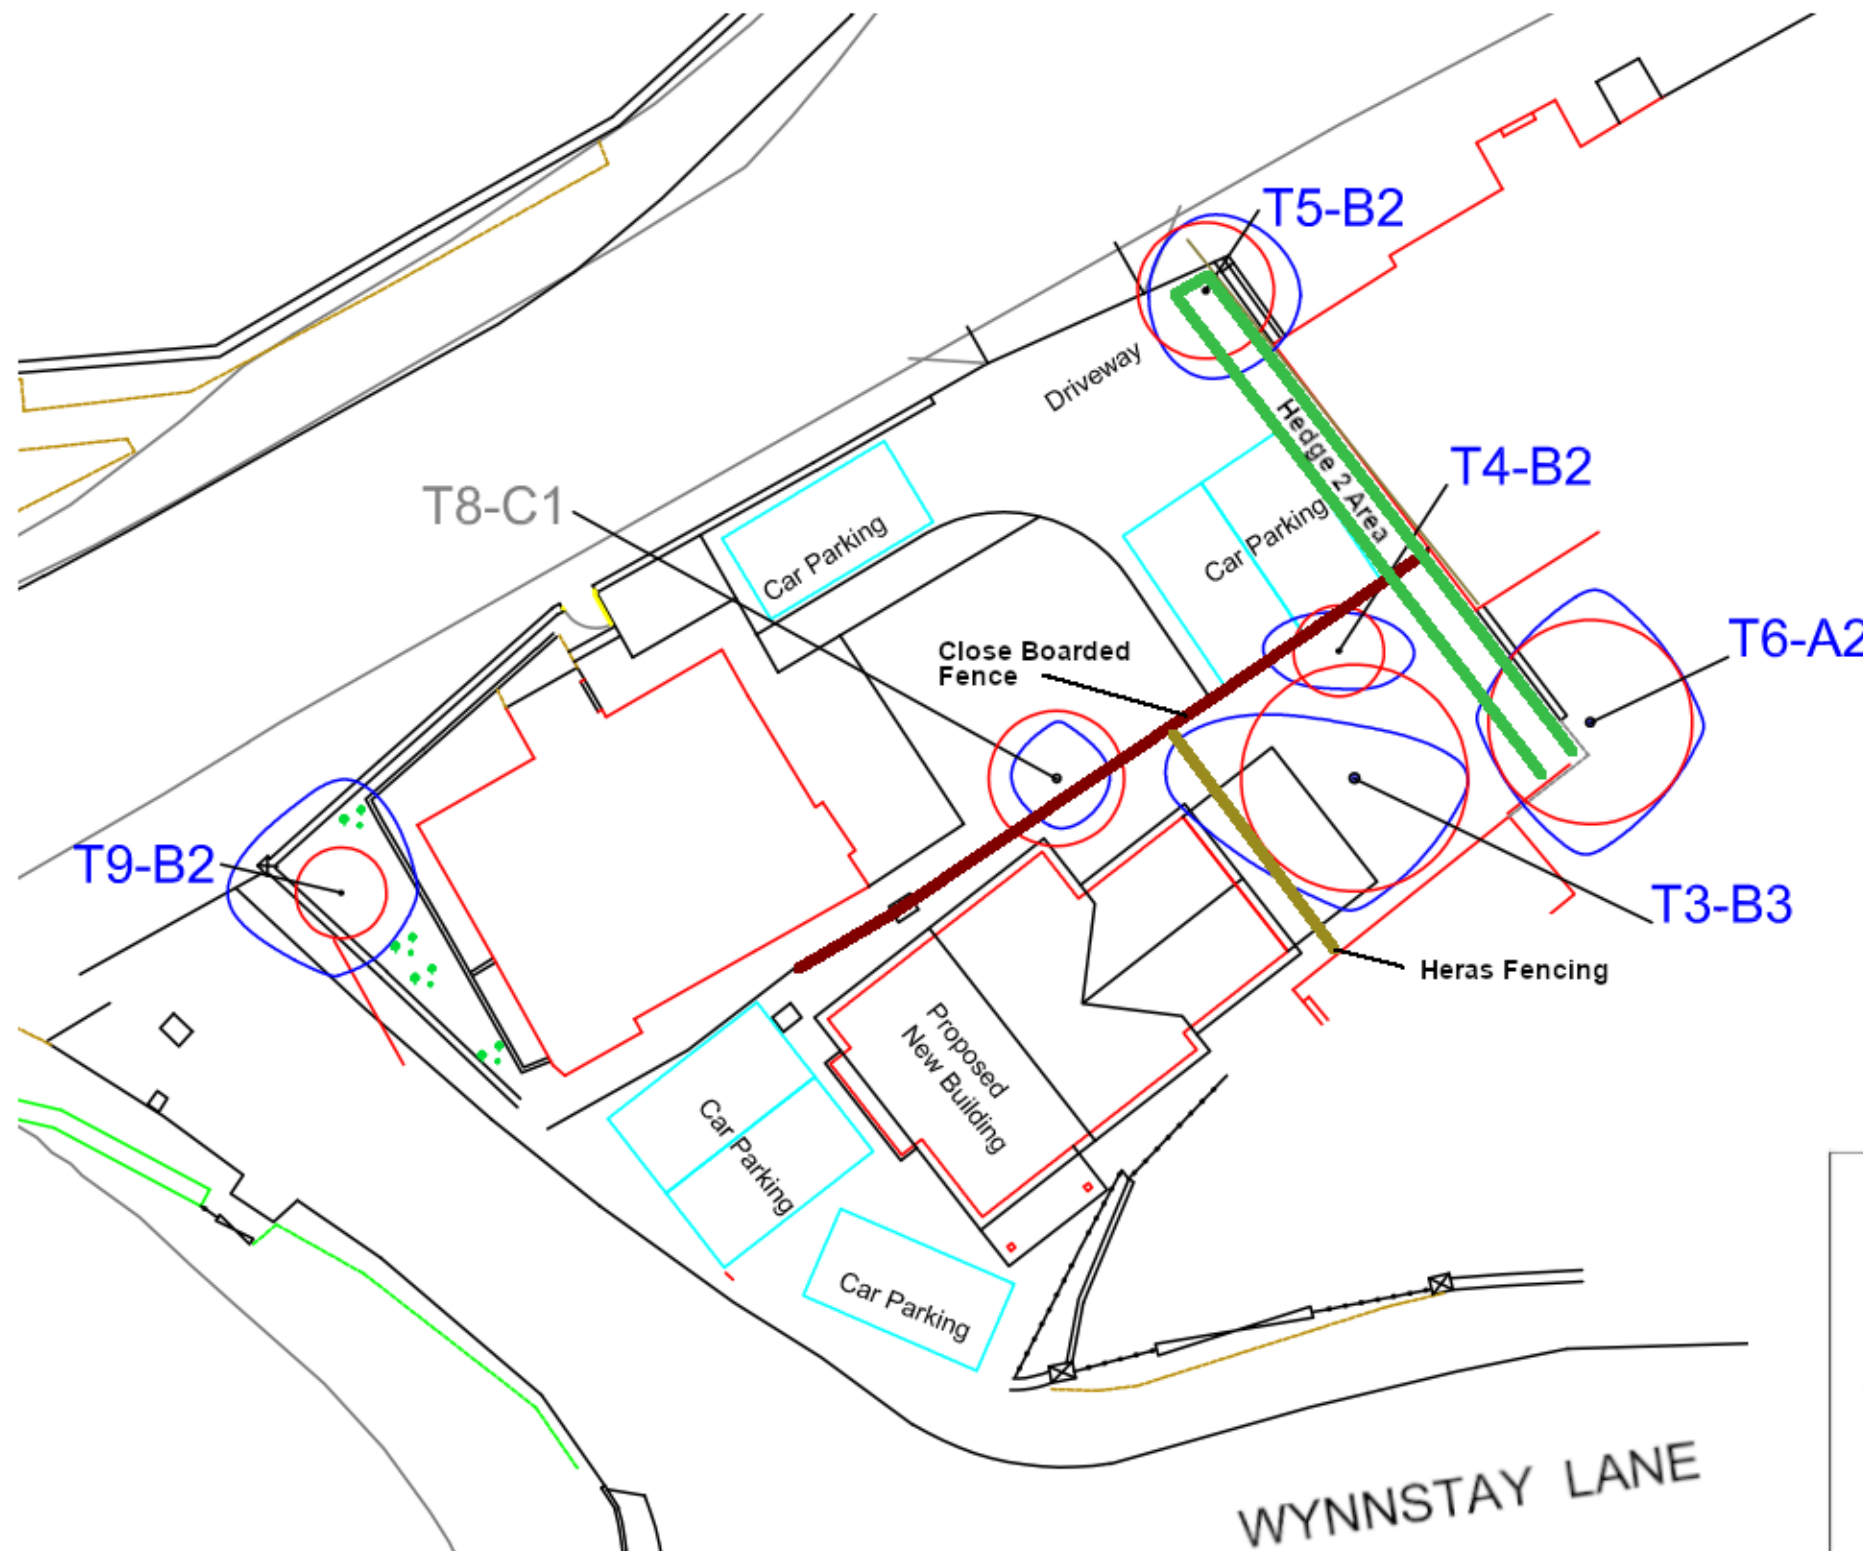

Tree Protection Method Statement

Prior to all construction works

- 1 Erect 1.8m post and close boarded fence.
- 2 Erect Heras fencing as per drawing below one metre from the building.

During Construction. In relation to the identified trees:

T3-B3 - Apple. please refer to the picture as the canopy is only small on two trunks and the RPA is slightly deceptive in shape as to what's on site. It is recommended that the left hand branch is pruned to slightly within the line of the Heras fencing.

Use CellWeb TRP cellular confinement system products as a patio foundation to minimise soil disturbance. Ensure that the patio overlaid on top has a permeable grouting system.

Prune as a fruit tree in winter to encourage outward horizontal growth.

Ingledene Driveway and Car Parking Area. These areas affect the root protection areas of both the T4-B2 Apple and T5-B2. Lilac. Within the root protection areas of these trees that lie in the driveway and carparking area, together with an additional metre radius, use CellWeb TRP products as a foundation to minimise soil disturbance and where necessary excavate within the RPA using hand tools and cut cleanly any tree roots. The paving should be of a permeable nature.



T5-B2 – Lilac. Avoid uprooting when felling Hedge 2 – by leaving one or more low tree stumps adjacent to the lilac to maintain soil structure.

T6-B2 – In the event that the removal of timber shed is required check whether there is a cement base. If not then no tree protection work is required. If there is a cement base, then break it up using hand tools and remove it without damaging any tree roots and re-instate the ground.

T8-C1 – During construction works of the proposed new building place 25m in diameter exterior plywood on the ground within the tree root protection area for construction workers to move over and lift up and night time and in remove in heavy rain.

T9-B2 – No tree protection works required.

Post Construction. Do not remove the Heras fencing until all external construction work is confirmed as having been completed.

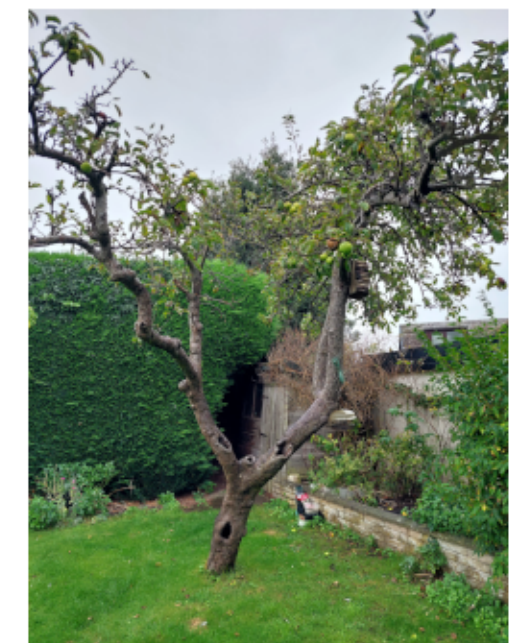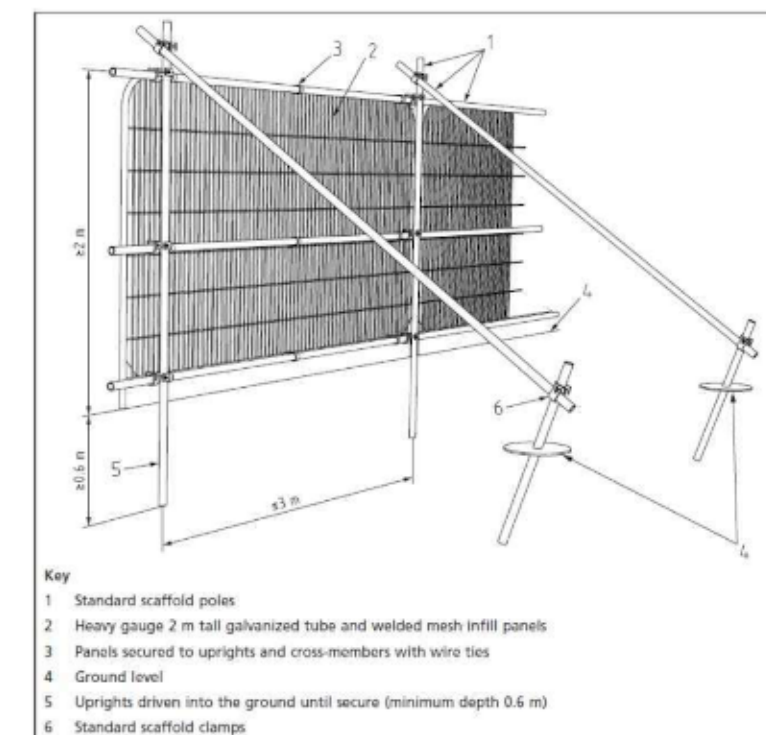

T3-B3 Apple Tree