
NOT FOR MANUFACTURE

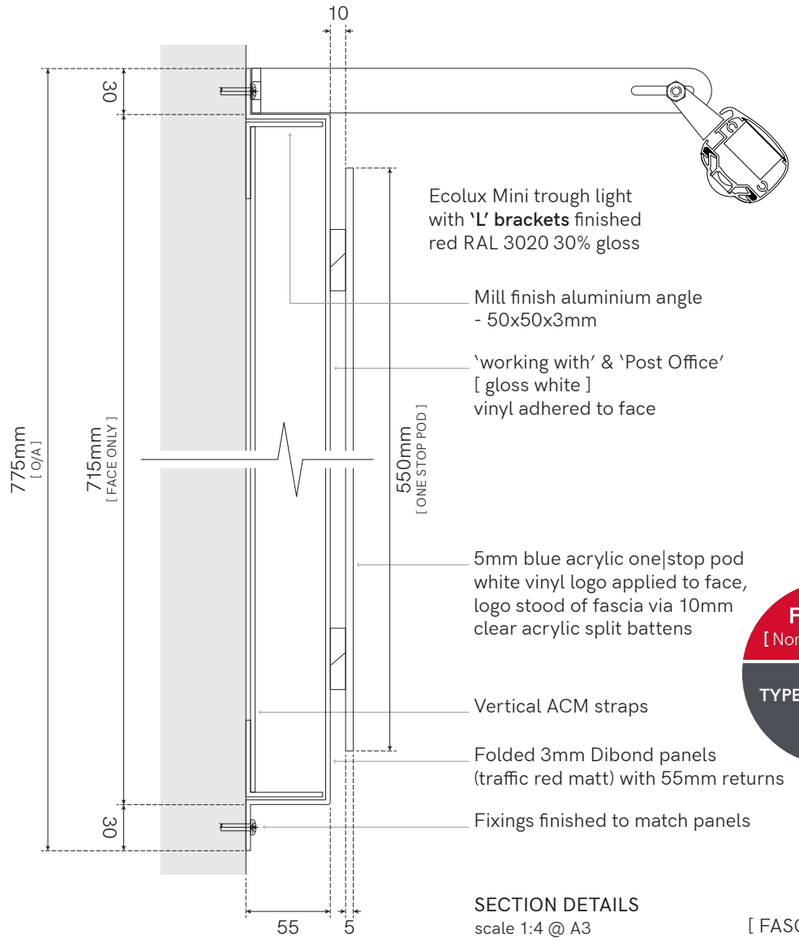

Ecolux Mini trough light with **'L' brackets** finished red RAL 3020 30% gloss

Mill finish aluminium angle - 50x50x3mm

'working with' & 'Post Office' [gloss white] vinyl adhered to face

5mm blue acrylic one|stop pod white vinyl logo applied to face, logo stood of fascia via 10mm clear acrylic split battens

Vertical ACM straps

Folded 3mm Dibond panels (traffic red matt) with 55mm returns


Fixings finished to match panels

FASCIAS
[Non-illuminated]
TYPE **D** [55]


SECTION DETAILS
scale 1:4 @ A3

NOTE - NEW TIMBER SUB FASCIAS REQ'D, CURRENT SUB FASCIAS ARE ROTTEN [**BY OTHERS**]
NEW TIMBER SUB FASCIAS TO PERMIT FIXING OF SIGNS AS SIZED & SHOWN ON THIS DRAWING

[FASCIA : **A**]

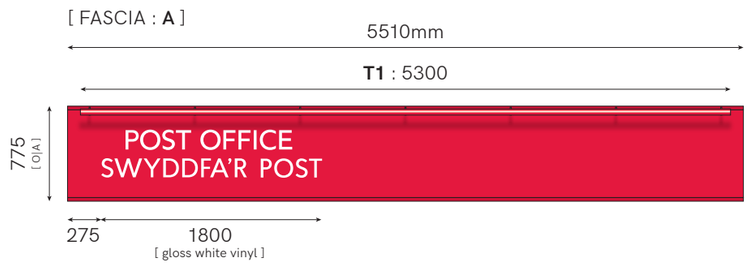

[FASCIA : **B**]

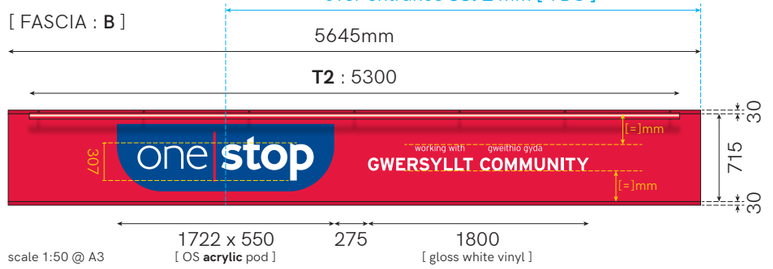

scale 1:50 @ A3

Scale Bar 1:50 @ A3
0 0.5m 1m 2m 3m 4m 5m 10m

Scale Bar 1:4 @ A3
0 50 100 150 200 250mm

innovate signs + implementing your brand

15 Barnes Wallis Rd, Fareham
Hampshire PO15 5TT

Tel: 023 8023 2311
Web: www.innovatesigns.co.uk
Email: info@innovatesigns.co.uk

Client	One Stop Stores			Title	Proposal	Rev	Date	Description	Drw By
Site Name	Wrexham, Dodds Lane			Date	27/01/2026	A	17/11/25	Initial Design	IW
Job No.	28888	Epos Code	6879	Drawn	IW	B	26/11/25	Fascia [B] OS pod, added ACMs [C][D][E] + ACM-VW [A] included a 2nd option for post sign, store floor plan	IW
Proj Type	Franchise [New] [Wales]			**Approved**	--/--/-- --	C	03/12/25	Half height apples also now ACM-VWs	IW
PM	EK | NR	Des. | SR	OS | PM : AR|BN	Drwg No.	D	D	27/01/26	Re-arrange images ACM [B] apples, ACM-VW [A][B] beer and ACM-VW [C] blue with poster cases [x2]	IW

This drawing is for approval purposes.
Please check all details noted on the drawing including spelling, and provide written confirmation of your approval to an **Innovate Signs Project Manager**. Once approved production will commence based on the approved drawing. Any changes made after production has begun will incur an additional cost.