

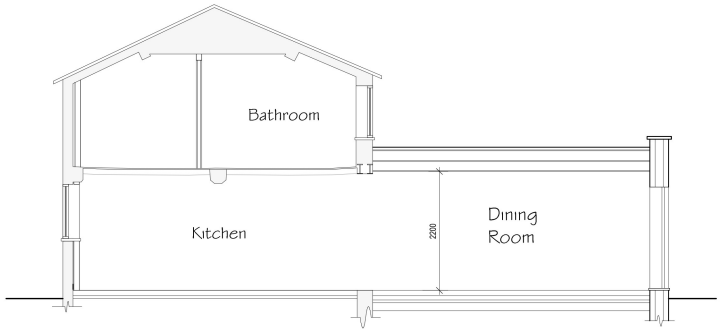


Proposed Section Y-Y 1:50

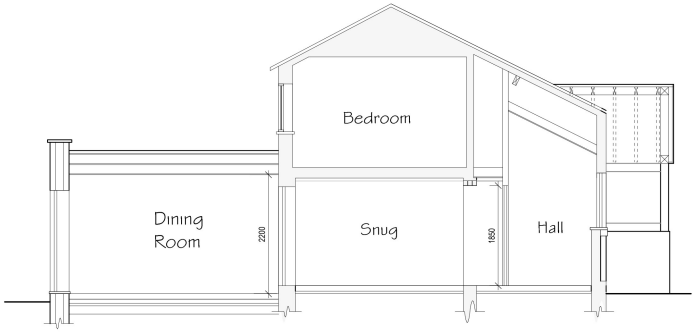

Proposed Section Z-Z 1:50

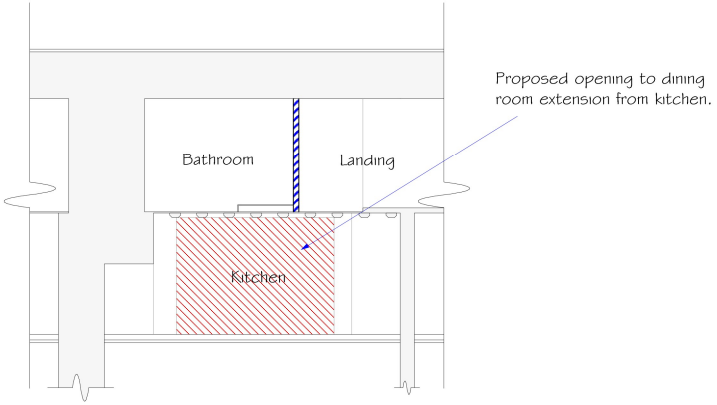

Proposed Section X-X 1:50

Key

- Proposed Lime Rendered wall finish
- Floor level to be lowered by 150mm.
- Existing Timber elements within walls
- New 100mm studwork partition walls with plasterboard panels and plaster skim
- New insulated Partitions to comprise of: 25mm wood wool board with lime plaster skim Thermafleece or similar insulation to void.

Rev	Date	Detail	Initial
H	07/26	Additional Info	L.F.
G	06/26	Additional Info	L.F.
F	06/26	Dismantled Stonework indicated	SIH
E	03/26	Additional Info	L.F.
D	03/26	Additional Info	A.W.
C	03/26	Additional Info	D.J.E.
B	03/26	Additional Info	D.J.E.
A	03/26	Additional Info	L.F.

Project:
Proposed Alterations at Pickhill Farm, Cross Lanes, Wrexham, LL13 OUL

Title: Planning: Sections

Scale: (A1) 1:50

Drawn By: S Hatherall

Date: Feb 2026

Drawing No: JL195/009

Sheet: 7 of 9

blueprint architectural services
partner LABC
Office 3K4,
Redwither Business Tower,
Wrexham. LL13 9XT
Tel: 01978 356500
www.blueprintarchitectural.com
© copyright all rights reserved