PLAY AREA NOTES

All play equipment and items such as gates, fences, litter bins and seating should be constructed and installed to apply to the requirements of BS EN 1176 Playground Equipment Standards.

Playground Surfacing to follow European Standards EN 1177 Impact Absorbing Playground Surfacing AND bs 7188. Surface thickness depending on the free height of fall of the equipment installed. The free height of the fall of the equipment to be checked by surface manufacturer, before installation.

Equipment manufacturers/suppliers must submit documentary evidence of compliance with BS EN 1176 and BS EN 1177.

Where equipment is unable to meet a standard, an explanation of acceptability or evidence of third party testing by a recognised body or a risk assessment should be provided.

Appropriate test certificates should be obtained by the client indicating that the surfacing meets the impact absorbency requirements for the equipment to be used.

The installer should provide written confirmation that the equipment and surfacing have been installed to the manufacturer's instructions and to the relevant standard where appropriate

Where considered necessary, a post-installation inspection, including indicative surfacing tests, should be carried out by RoSPA or other appropriate body.


Play area to comply with;

LEGISLATION

- Health and Safety at Work etc Act 1974
- Occupiers Liability Acts 1957/1984
- Disability Discrimination Act 1995
- Management of Health and Safety at Work Regulations 1999

PLAY EQUIPMENT STANDARDS

- BS EN 1176: Playground Equipment (11 Parts)
- BS EN 1177: Impact Absorbing Playground Surfacing
- BS EN 15312: Free access multi-sports equipment

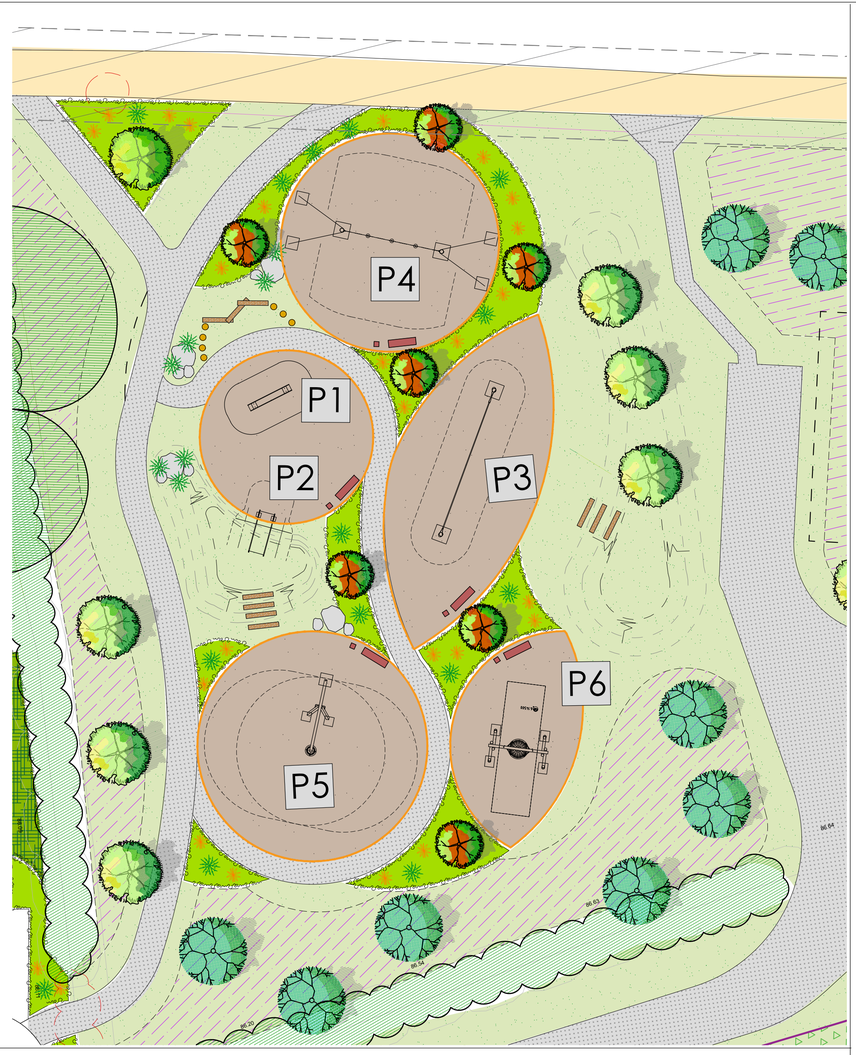



P1 Totterbeam



P2 Stainless Steel Slide



P3 Sackline



P4 Swing Rope Equipment with pendulum seats and tensioning



P5 Tractor Tyre Swing



P6 Cradle Nest

LEGEND

P1 **Totter Beam**
Code: 6.05000
Supplier: Richter Spielgerate or similar

P2 **Stainless Steel Slide**
Code :3.63320
Supplier :Timberplay or similar

P3 **Slackline**
Code :7.15500
Supplier :Timberplay or similar

P4 **Swing Rope Equipment with pendulum seats and tensioning**
Code :7.65500
Supplier :Timberplay or similar

P5 **Tractor Tyre Swing**
Code :7.45000
Supplier :Timberplay or similar

P6 **Cradle Nest**
Code: 6.14500
Supplier: Richter Spielgerate or similar

Proposed Mounds
Each contour indicates 0.25m height difference

Proposed Boulders

Stepping Stumps
Code: TT.2.01
Supplier: Duncan & Grove or similar

Natural Playground Logs
Code: TT.1.16
Supplier: Duncan and Grove or similar

Proposed Cork Surface
Product: Corkeen
Supplier: PlaySmart UK or similar

Proposed Timber Edging

Proposed Bench

Proposed Litter Bin

Existing Trees and Hedges to be Retained

Proposed Native Trees
Trees to be planted as 16-18cm, Extra Heavy Standard, 4.5-6m high with 2m clear stem. Trees to be secured with underground guying system.

Proposed Medium Size Ornamental Trees
Trees to be planted as 14-16cm girth, Extra Heavy Standard, 3.5-4m high. Trees to be staked and secured with suitable rubber ties.

Proposed Small Ornamental Trees
Trees to be planted as 10-12cm girth or 50L containers, 2-3m high and secured with single stake and suitable rubber ties.

Proposed Shrub Planting
Ornamental shrub planting, to be planted in 3-4L containers at 3-4 p/m², and enhanced by feature specimens in 10-20L pots.

Proposed Wildflower Meadow
To be Emorsgate EM8 Meadow Mixture, supplied by Emorsgate or similar approved. Including 80% of ornamental grasses and 20% of wildflowers. Sowing rate 4/gm2.


Proposed Amenity Grass

Proposed Gravel Path

GENERAL NOTES

1. This drawing is the copyright of tpm landscape Ltd and cannot be reproduced in any form without the consent of the company.
2. This drawing is to be read in conjunction with detail landscape drawings, details and specification.
3. This drawing is to be read in conjunction with all relevant Architects', Engineer's, Specialists, Bills of Quantities and Specifications.
4. The insertion of any firm or proprietary brand on this drawing is an indication of the class or quality required and does not exclude the use of alternative materials that are equal in performance, quality and appearance, provided that they have been approved in writing by the Landscape Architect.
5. The Contractor is responsible for accurately ascertaining the position of underground services and responding to all relevant service easement requirements.
6. All dimensions are in millimetres unless stated otherwise, for the purposes of construction this drawing must not be scaled and only written dimensions used. Written and scaled dimensions to be checked on site, any discrepancies reported prior to work commencing. IF IN DOUBT PLEASE ASK.
7. All work and materials are to be in accordance with the relevant British Standards and Code of Practice.
8. All Proprietary products are to be used strictly in accordance with the manufacturer's instructions and details.

LOCATION PLAN (NOT TO SCALE)

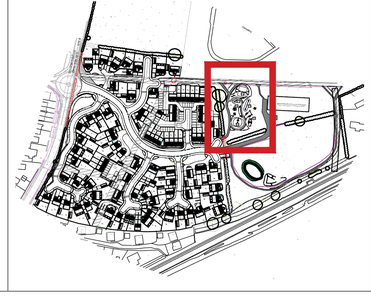

REVISION NOTES

Rev	By	Description	Date
-	-	-	-

Client
SG ESTATES

Project
Rhosrobin, Llay New Road, Wrexham

Description
LEAP Design

Status
For Approval

Scale @ A1	Drawn	Checked	Date
1:200	TS	CT	30.05.24
Job number	Drawing number		Revision
4657	102		-

tpm landscape
chartered landscape architects
address: 4th Floor Studio 10 Little Lever St Manchester M1 1HR
tel: 0161 235 0600 fax 0601 email info@tpmlandscape.co.uk