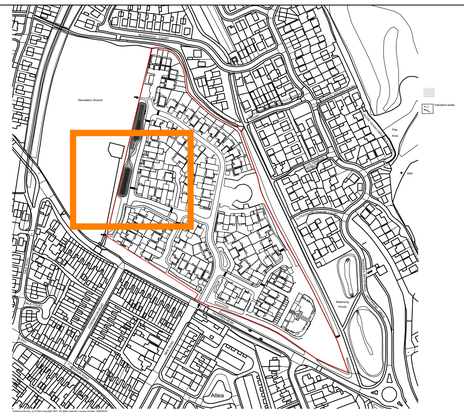


Location Plan, NTS

0 2 4 6 8 10 15 20m

Scale 1:200

Page 1 [SHF.1154.029.ENZ.XX.00.DR.L.45.101]

Page 3 [SHF.1154.029.ENZ.XX.00.DR.L.45.103]

Page 4 [SHF.1154.029.ENZ.XX.00.DR.L.45.104]

1No. BET TRI xhs14
1No. BET JER ms3
80m2 NATIVE SHRUB THICKET MIX
80No. plants @ 1m centres
1No. CRA MON ss
1No. ACE ROY xhs14
Pictorial Meadows Native
Meadow mix, sown @ 3g/m2
(Continues page 1)
3No. QUE ROB hs
2No. QUE ROB hs
3No. SOR AUC hs
50m2 NATIVE SHRUB THICKET MIX
50No. plants @ 1m centres
2No. BET JER ms3
4No. Pop ITAL hs12
2No. SAL PEN xhs14
2No. ACE ROY xhs14
19m2 GROUNDCOVER MIX
95No. plants @ 5/m2
1No. SAL PEN xhs14
1No. CAS SAT ss
1No. Pin syl c250
1No. Pin syl c250
1No. ALN GLU hs
48m NATIVE HEDGE MIX 18
288No. plants @ 6/m
1No. Pru avi xhs14
Pictorial Meadows Native meadow
mix, sown @ 3g/m2
(Continues page 3)
1No. QUE ROB hs
1No. BET JAC ms2
1No. CAR BET hs
1No. BET JER ms3
246m2 NATIVE SHRUB THICKET MIX
246No. plants @ 1m centres
2No. ALN GLU hs
1No. BET JAC ms2
1No. CAR BET hs
1No. QUE ROB hs
1No. BET TRI xhs14
1No. ACE CAM hs
1No. ULM NEW ss
1No. ACE ROY xhs14
1No. ALN GLU hs
1No. ACE STR hs
4No. QUE ROB hs
1No. Pin syl c250
3No. CAR BET hs
247m2 Pictorial Meadows Native
meadow mix, sown @ 3g/m2.
1No. BET FAS hs
1No. BET ERM ss
10m Holly Hedge 6/m
60No. plants @ 6/m
1No. Cor Kou 10L
1No. Cle vit 2L
22m NATIVE HEDGE MIX 18
132No. plants @ 6/m
9m2 GROUNDCOVER MIX 10
36No. plants @ 4/m2
2No. CRA MON ss
2No. Jas Gra
2No. ULM NEW ss
4m Holly Hedge 6/m
24No. plants @ 6/m
10m Holly Hedge 6/m
60No. plants @ 6/m
2No. Cor Kou 10L
1No. ALN GLU hs
1No. AME LAM ms150
1No. BET FAS hs
5m2 SUN MIX
20No. plants @ 4/m2
6m Hornbeam Hedge
36No. plants @ 6/m
1No. AME LAM ms150
5m2 GROUNDCOVER MIX
25No. plants @ 5/m2
1No. BET FAS hs
2No. AME LAM ms150
8m2 GROUNDCOVER MIX
40No. plants @ 5/m2
12m Hornbeam Hedge
72No. plants @ 6/m
5m2 GROUNDCOVER MIX
25No. plants @ 5/m2
7m Hornbeam Hedge
42No. plants @ 6/m
3m2 SUN MIX
12No. plants @ 4/m2
1No. Lon per 3L
1No. SOR AUC hs
13m NATIVE HEDGE MIX 22
78No. plants @ 6/m
2No. ACE ROY xhs14
4m Holly Hedge 6/m
24No. plants @ 6/m
10m Holly Hedge 6/m
60No. plants @ 6/m
19m2 GROUNDCOVER MIX
95No. plants @ 5/m2
2No. CRA PAU ss
1No. BET JAC ms2
3No. CAR BET hs
4m Holly Hedge 6/m
24No. plants @ 6/m
2No. Pru avi xhs14
1No. QUE PAL xhs14
77m2 Pictorial Meadows Native
meadow mix, sown @ 3g/m2.
1No. Pin syl c250
2No. Cor Kou 10L
1No. ALN GLU hs
1No. AME LAM ms150
1No. BET FAS hs
4m2 LOW GROUNDCOVER MIX 3
16No. plants @ 4/m2
15m NATIVE HEDGE MIX 4
90No. plants @ 6/m
1No. SOR AUC hs
1No. Lon per 3L
16m NATIVE HEDGE MIX 4
96No. plants @ 6/m
1No. COR AVE Pur ms3
25m Holly Hedge 6/m
150No. plants @ 6/m
21m Holly Hedge 6/m
126No. plants @ 6/m
1No. BET JAC ms2
4m Holly Hedge 6/m
24No. plants @ 6/m
7m NATIVE HEDGE MIX 4
42No. plants @ 6/m
4m NATIVE HEDGE MIX 4
24No. plants @ 6/m
1No. BET FAS hs
1No. Jas Gra
4m NATIVE HEDGE MIX 4
24No. plants @ 6/m
1No. Lon per 3L
1No. Cle vit 2L
1No. SOR Fas hs
1No. COR AVE Pur ms3
1No. ALN GLU hs
1No. SOR AUC hs
1No. Lon per 3L
1No. COR AVE Pur ms3
16m NATIVE HEDGE MIX 4
96No. plants @ 6/m
10m Holly Hedge 6/m
60No. plants @ 6/m
4m Holly Hedge 6/m
24No. plants @ 6/m
25m Holly Hedge 6/m
150No. plants @ 6/m
21m Holly Hedge 6/m
126No. plants @ 6/m
1No. BET JAC ms2
14m NATIVE HE
84No. p
2No. BET JAC n
1No. AME LAM
23m2 ORNAME
1No. ALN GLU hs
1No. SOR F
1No. AME LAM ms150
1No. BET FAS hs

Gatewen Road - Soft Landscape Plan [Page 2 of 6]

NOTES

- Do not scale from this drawing
- All dimensions are in meters unless stated otherwise
- This drawing is to be read in conjunction with all relevant drawings and documents associated with this project.
- All surveyed information including levels and layout is provided by others
- All existing and proposed dimensions, levels and locations to be checked and verified by the main contractor on site prior to the commencement of the works and any anomalies reported to the engineer.

Key

Soft Works

- Existing Tree Retained
- Existing Groups
- Proposed New Tree Planting
- Specimen Multistem Tree and Shrub Planting
- Specimen Climber Planting
- Native Shrub Planting
- Native Hedge Planting
- Formal Hedge Planting
- Groundcover Planting Mix
- Ornamental/ Long Grass Planting
- Pollinator Lawn
- Wildflower Planting
- Amenity Lawn
- Gravel Mulch

Rev	Date	Description	DRA	CHK	APP
PL04	03/09/24	Pump station removed	GB	RW	GB
PL03	27/07/22	Updated green infrastructure and site layout	NP	GB	GB
PL02	04/02/22	Updated pedestrian route	NP	GB	GB
PL01	16/12/21	First issue	NP	GB	GB

Project
Gatewen Road, Wrexham

Client
Bellway Homes Ltd

Drawing Title
Soft Landscape Plan
page 2 of 6

Status	Date	Scale
For Planning	16/12/21	1:200 @ A1

Drawn	Designed	Checked	Approved
NP	NP/GB	GB	GB

DWG No. 1154-029-ENZ-XX-01-DR-L-45-102 **Revision** PL04

enzygo environmental consultants
BRISTOL 01454 269 237 www.enzygo.com
MANCHESTER 0161 413 6444
SHEFFIELD 0114 321 5151 hello@enzygo.com

© Crown copyright and database rights 2019 Ordnance Survey 0100031673