Glandŵr Cymru
Canal & River Trust in Wales

Materials Schedule – Trevor Steps

Planning Ref: P/2024/1180

Condition 3









Stone Steps - Woodkirk Sandstone - Lightly Shotblasted



Gabion Stone – Cefn Mawr Stone – Example photo from Quarry. Stone is same as the stone used to construct the Aqueduct. Stone to be Provided from Cefn Mawr Quarry



Example of Breedon Surfacing to be used on path / landings


Photo showing Handrail timber / steel and stone



Oroko - Timber Handrail -



Similar Example photo

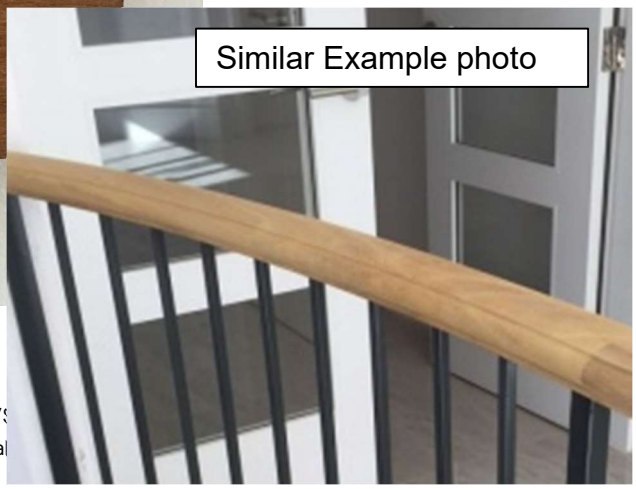

https://canalrivertrust.sharepoint.com/sites/NationalPlanningDeliveryTeam/S
Wrexham - Projects/Steps to River Dee/Discharge of Conditions/3. Material