


8 Conningsby Court

Net Biodiversity Benefit and Green Infrastructure Statement

Single Storey Rear/ Side Extension

Rev b – 06.2026

Contents

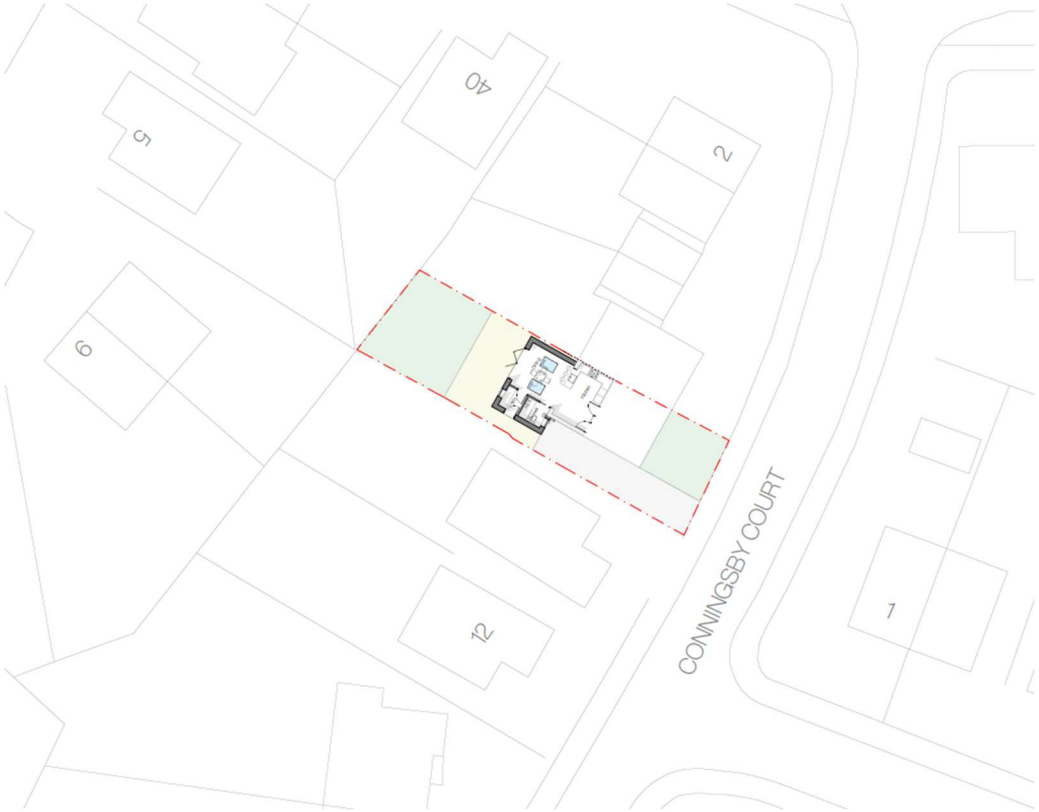

1.0 Net Biodiversity Benefit

2.0 Green Infrastructure Statement


1.0 Net Biodiversity Benefit

1.1 In accordance with paragraph 6.4.5 of Planning Policy Wales 12, all developments are required to demonstrate that provision has been made for net biodiversity benefit (NBB).

1.2 The below indicates the measures which will be taken on site to ensure a benefit to biodiversity is achieved via the proposed application.

1.3 During the design process, we had carefully considered that the proposed extension did not harm any wildlife or have any negative impact on the biodiversity. Currently, there are no hedgehog holes in the fencing, bat or bird boxes, or log piles. However, there is a well-established planting on/ adjacent to the application site which will be retained. These are unaffected by the proposed development.

1.4 To improve the ecology within the boundaries of the property, we will provide a log pile in the position indicated below in red and a bird box indicted in blue. The log pile will be suitable for invertebrates, small mammals and amphibians. Log pile to be loosely laid in a single direction and held in place with sticks driven into the ground.

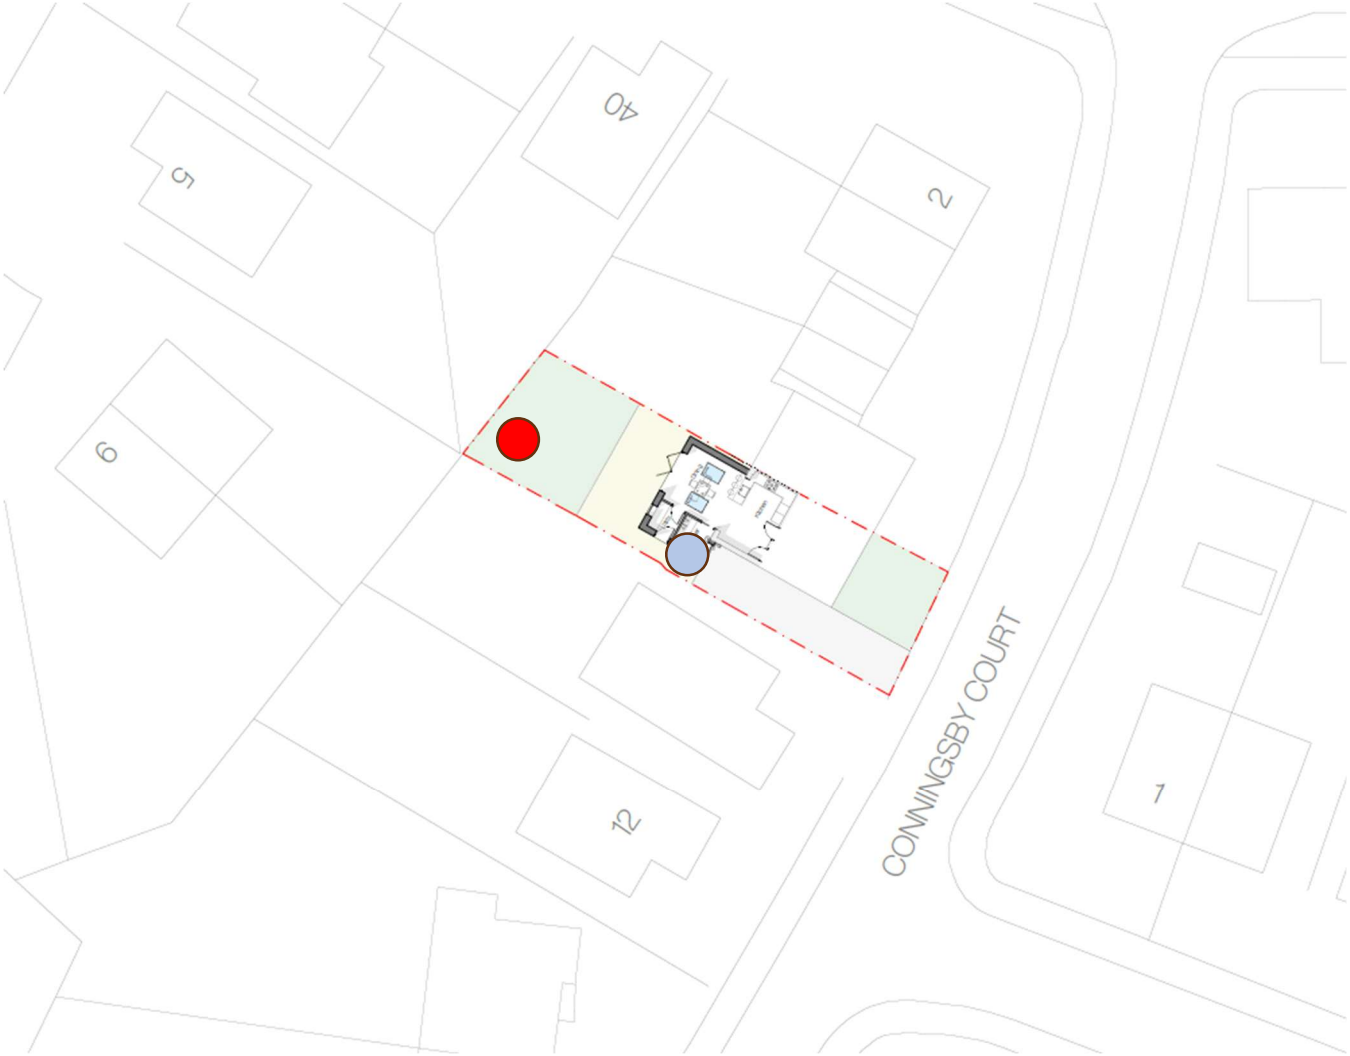



Typical log pile

House sparrow terrace- wooden (or woodcrete) nest box with 3 sub-divisions to support 3 nesting pairs. Placed under eaves. Entrance holes 32mm diameter. Dimensions: H310 x W370 x D185mm. Also suitable tits, redstarts and spotted flycatchers. Place atleast 2m from Finished Ground Level.



2.0 Green Infrastructure Statement

Form completed by:	Jack Felgate
Date:	14.09.2025
Address of site:	8 Conningsby Court, Wrexham, LL13 9QW
Grid reference:	SJ 35580 51954
Description of Proposal:	Single Storey Rear/ Side Extension

1. Details of all existing green infrastructure on site and approximate size:

Boundary 1:	1.8m Fencing
Boundary 2:	1.8m Fencing with planting to one side
Boundary 3:	1.8m Fencing
Front Garden:	Planting
Rear Garden:	As above boundaries 1-3.

2. What green infrastructure features (trees, hedges, hedgebanks) have already been removed from site and/or require removal to facilitate the development (add lengths or areas)?

Boundary 1:	No boundaries to be affected by the proposed development

3. How are the retained features being protected during development (BS5837:2012)?

Boundary 1:	Extension walls are inset of the fence, therefore no adverse effect.

4. What Green Infrastructure is being planted as mitigation for losses?

Boundary 1:	Garden is already well planted, therefore no additional planting.
Boundary 2:	Log pile is to be installed towards the rear of the garden to provide the biodiversity benefit.

5. Biodiversity enhancements

The enhancements do not need to be directly attached to the proposed new construction; they can be attached to the host dwelling or placed within the garden, but they do need to be on land within the red or blue line. The principle is that the enhancements should lead to a 'net benefit' for biodiversity. The following biodiversity enhancements have also been added: Log pile is to be installed towards the rear of the garden and a new bird box to the side to provide the biodiversity benefit.

6. Management and maintenance.

   All existing hedgerows and trees are to be retained and maintained as usual by the applicant.

7. Conclusion

   Based on the information provided above, this development will result in a Green Infrastructure and Net Biodiversity Benefits upon completion.